

Prepared for:  
**US EPA Region 1**  
**Boston, Massachusetts**  
Project: EPA-SMP-07-002



# Total Maximum Daily Load for Pawtuckaway Lake, Nottingham, NH

January 2011

Original Draft Prepared by AECOM, 171 Daniel Webster Hwy, Suite 11, Belmont, NH 03220  
July 2009, AECOM Document Number: 09090-107-13.

**Final Revisions made by the NH Department of Environmental Services, January 2011.**



AECOM

Prepared for:  
**US EPA Region 1**  
**Boston, Massachusetts**

# Total Maximum Daily Load for Pawtuckaway Lake, Nottingham, NH



---

Prepared By



---

Reviewed By

Original Draft Prepared by AECOM, 171 Daniel Webster Hwy, Suite 11, Belmont, NH 03220  
July 2009, AECOM Document Number: 09090-107-13.  
**Final Revisions made by the NH Department of Environmental Services, January 2011.**

# Contents

**Executive Summary .....ES-1**

**1.0 Introduction ..... 1-1**

**2.0 Description of Water Body, Standards and Target ..... 2-1**

    2.1 Waterbody and Watershed Characteristics ..... 2-1

    2.2 Designated Uses ..... 2-4

    2.3 Applicable Water Quality Standards ..... 2-5

    2.4 Anti-degradation Policy..... 2-5

    2.5 Priority Ranking and Pollutant of Concern..... 2-6

    2.6 Numeric Water Quality Target..... 2-6

**3.0 ENSR-LRM Model of Current Conditions ..... 3-1**

    3.1 Hydrologic Inputs and Water Loading..... 3-3

    3.2 Nutrient Inputs..... 3-3

    3.3 Phosphorus Loading Assessment Summary ..... 3-8

    3.4 Phosphorus Loading Assessment Limitations..... 3-9

    3.5 Lake Response to Current Phosphorus Loads ..... 3-9

**4.0 Total Maximum Daily Load ..... 4-1**

    4.1 Maximum Annual Load..... 4-1

    4.2 Maximum Daily Load..... 4-1

    4.3 Future Development..... 4-1

    4.4 Critical Conditions..... 4-2

    4.5 Seasonal Variation ..... 4-2

    4.6 Reduction Needed..... 4-2

    4.7 TMDL Development Summary..... 4-3

**5.0 TMDL Allocation..... 5-1**

    5.1 Wasteload Allocations (WLAs) and Load Allocations (LAs) ..... 5-1

    5.2 Margin of Safety (MOS)..... 5-1

**6.0 Evaluation of Alternative Loading Scenarios ..... 6-1**

    6.1 Natural Environmental Background Phosphorus Loading ..... 6-4

    6.2 Septic System Load Removal..... 6-4

6.3	Internal Load Removal .....	6-4
6.4	Reduction of Watershed Loads to Meet In-lake Target of 12 µg/L.....	6-4
<b>7.0</b>	<b>Implementation Plan.....</b>	<b>7-1</b>
<b>8.0</b>	<b>Monitoring Plan .....</b>	<b>8-1</b>
<b>9.0</b>	<b>Reasonable Assurances .....</b>	<b>9-1</b>
<b>10.0</b>	<b>Public Participation .....</b>	<b>10-1</b>
<b>11.0</b>	<b>References .....</b>	<b>11-3</b>
<b>Appendix A: Methodology for Determining Target Criteria</b>		
<b>Appendix B: ENSR-LRM Methodology Documentation</b>		
<b>Appendix C: Land Use Categories, Export Coefficients, and Additional Calculations</b>		

## List of Figures

Figure 2-1. Pawtuckaway Lake Location and Bathymetry.....	2-2
Figure 3-1. Pawtuckaway Lake Watershed Land Use.....	3-2
Figure 8-1. NH DES Sampling Locations in Pawtuckaway Lake.....	8-2
Figure 9-1. Public Notice.....	10-2

## List of Tables

Table 2-1. Characteristics of Pawtuckaway Lake, Nottingham, NH.....	2-1
Table 2-2. Pawtuckaway Lake-North Basin Summer Water Quality Summary Table 2001-2007.....	2-3
Table 2-3. Pawtuckaway Lake-South Basin Summer Water Quality Summary Table 2001-2007.....	2-3
Table 2-4. Pawtuckaway Lake Tributary Water Quality Summary Parameters 2001-2006.....	2-4
Table 2-5. Designated Uses for New Hampshire Surface Waters.....	2-4
Table 3-1. Pawtuckaway Lake Water Budget.....	3-3
Table 3-2. Land Use Categories by Pawtuckaway Lake Subwatersheds.....	3-5
Table 3-3. Pawtuckaway Lake Phosphorus Loading Summary.....	3-8
Table 3-4. Predicted In-lake Total Phosphorus Concentration using Empirical Models.....	3-10
Table 3-5. Predicted In-lake Chlorophyll <i>a</i> and Secchi Disk Transparency Predictions based on an Annual Average In-lake Phosphorus Concentration of 12 $\mu\text{g/L}$ .....	3-11
Table 4-1. Pawtuckaway Lake Total Phosphorus Load at Target Criteria of 12 $\mu\text{g/L}$ .....	4-3
Table 6-1. Comparison of Phosphorus Loading Scenarios for Pawtuckaway Lake.....	6-2
Table 6-2. Lake Water Quality Response to Different Loading Scenarios for Pawtuckaway Lake.....	6-3
Table 7-1. Best Management Practices Selection Matrix.....	7-3

## Executive Summary

A Total Maximum Daily Load (TMDL) analysis was conducted for Pawtuckaway Lake in Nottingham, New Hampshire. Pawtuckaway Lake is currently listed by the State of New Hampshire as impaired for primary contact recreation because of the presence of hepatotoxic cyanobacteria and for aquatic life because of low dissolved oxygen saturation. This effort included the construction of a nutrient budget and setting a target value for phosphorus such that cyanobacteria bloom formation would no longer impair primary contact recreation. Reducing phosphorus concentrations and associated algal growth should also improve the dissolved oxygen conditions in the deep areas of the lake. The TMDL is then allocated among sources of phosphorus such that in-lake phosphorus concentrations meet the target and Pawtuckaway Lake supports its designated uses. The analysis suggests that the current loads of phosphorus to Pawtuckaway Lake must be reduced by 23 % overall in order to meet the target in-lake phosphorus value of 12  $\mu\text{g/L}$ . The load allocation puts primary emphasis on reducing watershed phosphorus sources over other sources due to the relative load contribution from the watershed and practical implementation considerations. It is expected that these reductions would be phased in over a period of several years. Successful implementation of this TMDL will be based on compliance with water quality criteria in Env-Wq 1700. Guidance for obtaining Clean Water Act (Section 319) funding for nonpoint source control is presented in Section 7.0. Suggestions for enhancement of the current monitoring program and general phosphorus loading reduction strategies are also provided.

## 1.0 Introduction

The Federal Clean Water Act (CWA) provides regulations for the protection of streams, lakes, and estuaries within the United States. Section 303(d) of the CWA requires individual states to identify waters not meeting current state water quality standards due to pollutant discharges and to determine Total Maximum Daily Loads (TMDLs) for these waters. A TMDL sets the maximum amount of a pollutant that a waterbody can receive and still support designated uses. A large number of New Hampshire lakes are on the 2006 and 2008 303(d) lists due to impairment of designated uses by chlorophyll *a* (chl *a*), cyanobacteria blooms or dissolved oxygen (DO) depletion (NH DES, 2006a, 2008b). Pawtuckaway Lake is included on the 2006 and 2008 lists due to the impairment of primary contact recreation caused by the presence of hepatotoxic cyanobacteria. Pawtuckaway Lake is also listed as impaired for aquatic life use because of low DO concentrations. The Pawtuckaway State Park beach and the town beach are also listed for low dissolved oxygen saturation. High levels of toxic cyanobacteria are indicative of nutrient enrichment. Low DO is also likely related to nutrient enrichment and associated algal production. Phosphorus is the primary limiting nutrient in northern temperate lakes, hence eutrophication due to phosphorus enrichment is the likely cause of the presence of hepatotoxic cyanobacteria and low DO. Nitrogen can also play a role in determining the type of algae present and the degree of eutrophication of a waterbody. However, phosphorus is typically more important and more easily controlled. A TMDL for total phosphorus (TP) as a surrogate for hepatotoxic cyanobacteria and DO has been prepared for Pawtuckaway Lake and the results are presented in this report.

The TMDL will be expressed as:

$$\text{TMDL} = \text{Waste Load Allocation (WLA)} + \text{Load Allocation (LA)} + \text{Margin of Safety (MOS)}$$

The WLA includes the load from permitted discharges, the LA includes nonpoint sources and the MOS ensures that the TMDL will support designated uses given uncertainties in the analysis and variability in water quality data.

Determining the maximum daily nutrient load that a lake can assimilate without exceeding water quality standards is challenging and complex. First, many lakes receive a high proportion of their nutrient loading from non-point sources, which are highly variable and are difficult to quantify. Secondly, lakes demonstrate nutrient loading on a seasonal scale, not a daily basis. Loading during the winter months may have little effect on summer algal densities. Finally, variability in loading may be very high in response to weather patterns, and the forms in which nutrients enter lakes may cause increased variability in response. Therefore, it is usually considered most appropriate to quantify a lake TMDL as an annual load and evaluate the results of that annual load on mid-summer conditions that are most critical to supporting recreational uses. Accordingly, the nutrient loading capacity of lakes is typically determined through water quality modeling, which is usually expressed on an annual basis. Thus, while a single value may be chosen as the TMDL for each nutrient, it represents a range of loads with a probability distribution for associated water quality problems (such as algal blooms). Uncertainty is likely to be very high, and the resulting TMDL should be viewed as a nutrient-loading goal that helps set the direction and magnitude of management, not as a rigid standard that must be achieved to protect against eutrophication. While daily expression of the TMDL is provided in this report, the annual mean load should be given primacy when developing and evaluating the effectiveness of nutrient loading reduction strategies.

The purpose of the Pawtuckaway Lake TMDL is to establish TP loading targets that, if achieved, will result in consistency with the State of New Hampshire Water Quality criteria Env-Wq 1703.14. Water quality that is consistent with state standards is, *a priori*, expected to protect designated uses. AECOM prepared this TMDL analysis according to the United States Environmental Protection Agency's (US EPA) protocol for developing nutrient TMDLs (US EPA, 1999). The main objectives of this TMDL report include the following:

- Describe water body, standards and numeric target value;
- Describe potential sources and estimate the existing TP loading to the lake;
- Estimate the loading capacity;
- Allocate the load among sources;
- Provide alternate allocation scenarios;
- Suggest elements to be included in an implementation plan;
- Suggest elements to be included in a monitoring plan;
- Provide reasonable assurances that the plans will be acted upon; and
- Describe public participation in the TMDL process.

This TMDL for TP will identify the causes of impairment and the pollutant sources and is expected to fulfill the first of the nine requirements for a watershed management plan required to qualify a project for Section 319 restoration funding (see Section 7.0).



## 2.0 Description of Water Body, Standards and Target

### 2.1 Waterbody and Watershed Characteristics

Pawtuckaway Lake (NHLAK7600030704-02-01) is located in Nottingham, New Hampshire and is within the Coastal Basin (Figure 2-1). The 317-hectare (ha) lake has a maximum depth of 15.2 meters (m) and a mean depth of 3.2 m. The lake volume is 9,995,941 cubic meters (m<sup>3</sup>) with a flushing rate of approximately 3.3 times per year. The lake has two distinct basins of roughly equal size. The watershed area is 4,965 ha and is located predominately in the Town of Nottingham. Nottingham is a town of 4,372 and it has grown 359% from 1970 to 2005 (ELMIB, 2007). The hepatotoxic cyanobacteria identified include *Anabaena spp.* and *Microcystis spp.* Pawtuckaway Lake has a warm water fishery with smallmouth bass (*Micropterus dolomieu*), largemouth bass (*Micropterus salmoides*), pickerel (*Esox niger*), bullhead (*Ameiurus sp.*), white perch (*Morone americana*), and black crappie (*Pomoxis nigromaculatus*) (NH Fish and Game, 2007). Alewife (*Alosa pseudoharengus*) were first stocked in 1994 and yearly since then. Select characteristics of Pawtuckaway Lake and its watershed are presented in Table 2-1.

**Table 2-1. Characteristics of Pawtuckaway Lake, Nottingham, NH.**

Parameter	Value
Assessment Unit Identification	NHLAK600030704-02-01
Lake Area (ha)	317
Lake Volume (m <sup>3</sup> )	9,995,941
Watershed Area (ha)	4,965
Watershed/Lake Area	31,523
Mean Depth m, ft	3.2, 10.5
Max Depth m, ft	15.2, 49.9
Flushing Rate (yr <sup>-1</sup> )	3.3
North Epilimnetic TP (µg/L mean, range)	15, 5-35
North Hypolimnetic TP (µg/L mean, range)	49, 11-142
South Epilimnetic TP (µg/L mean, range)	13, 6-41
South Hypolimnetic TP (µg/L mean, range)	18, 8-38
Epilimnion TN: TP Ratio	40
Impaired Uses and Causes of Impairment	<i>Primary Contact Recreation: Hepatotoxic Cyanobacteria (5-M); Aquatic Life: Dissolved Oxygen Saturation (5-M); Source Unknown</i>
Hypolimnetic Anoxia	Yes

\*Water quality statistics are calculated from 2001-2007 data.

\*\*Source: 2006 & 2008 NH 303d Lists of Threatened or Impaired Waters that Require a TMDL. Category '5' = TMDL Required, Category 'M' = Marginal Impairment, and Category 'P' = Priority Impairment.

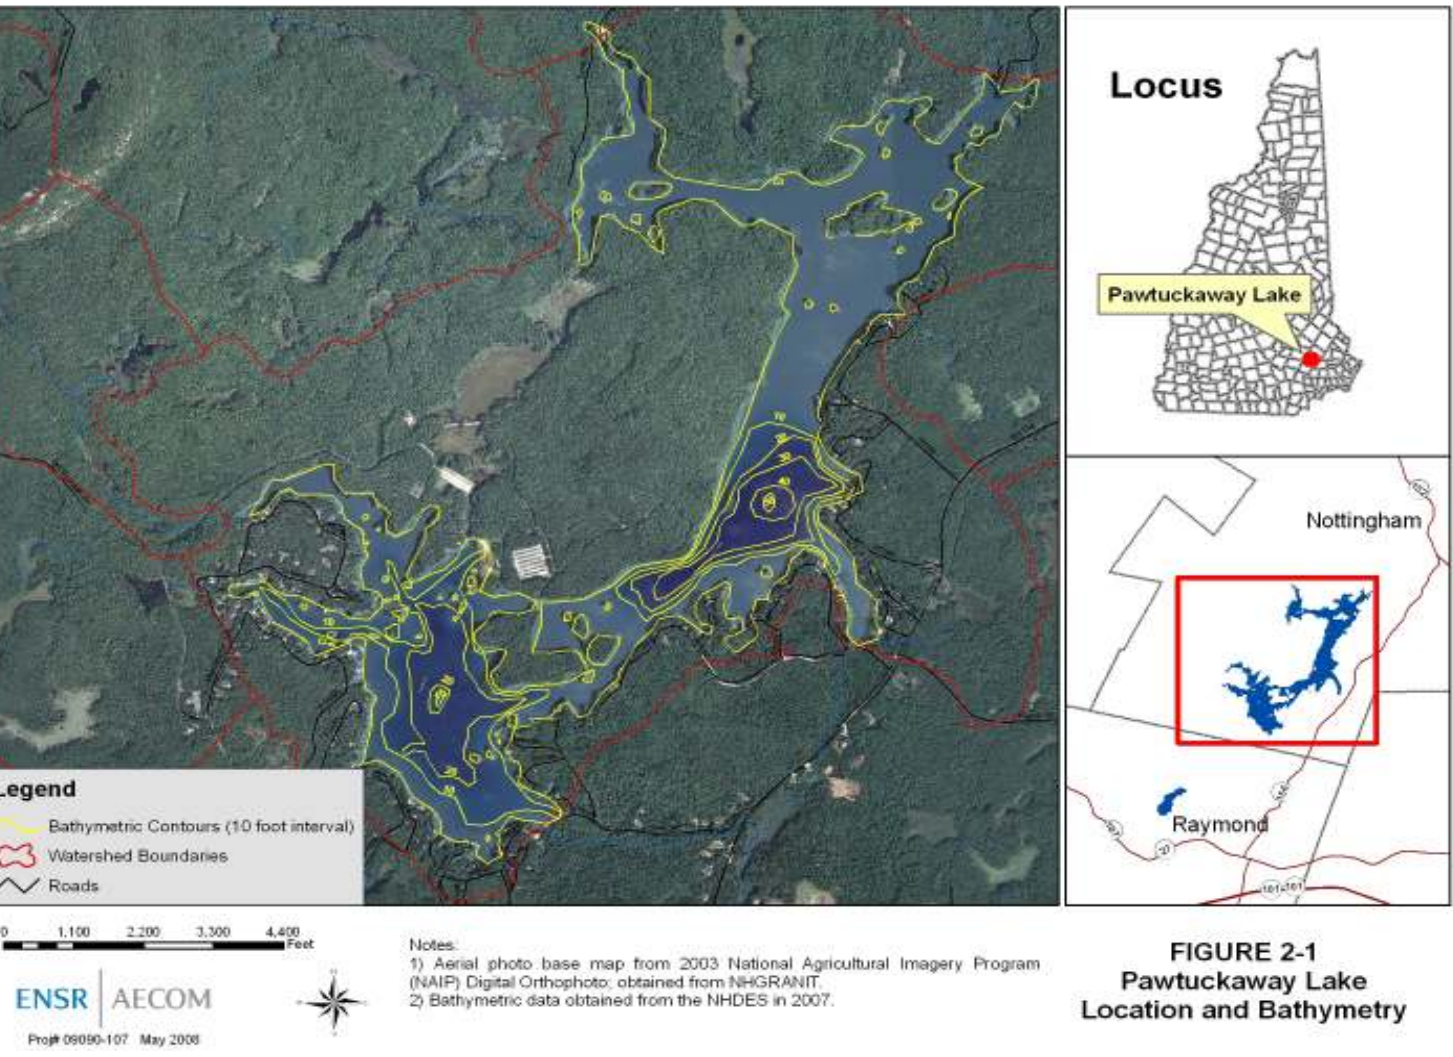


Figure 2-1. Pawtuckaway Lake Location and Bathymetry.

New Hampshire Department of Environmental Services (NH DES) conducted Lake Trophic Studies in the summers of 1979, 1989, and 1998. The Volunteer Lake Assessment Program (VLAP) began monitoring Lake Pawtuckaway in 1988 and continues to the present day (NH DES, 2006b). NH DES conducted a diagnostic/feasibility study in 1995 (Connor and Landry, 1995) and Geosyntec developed a watershed plan in 2008 (Geosyntec, 2008).

The mean, median and range of selected water quality parameters from each sampling location from the most recent data available (2001-2007) are summarized in Tables 2-2. The hypolimnion has low DO concentrations (< 1 mg/L) at depths below 6.5 m during the summer. Secchi disk transparencies (SDT) in the north basin range from 1.9 to 4.8 m with an average of 3.3 m. In the south basin, Secchi disk measurements range from 2.2 to 5.0 m with an average of 3.4 m. Cyanobacteria blooms containing hepatotoxic microcystins in summer have been observed; chl *a* concentrations over this time period range from 2.1-15.4 µg/L in the north basin and 2.5-11.9 µg/L in the south basin. TP concentrations in the epilimnion range from 5 to 35 µg/L with a mean of 15 µg/L in the north basin and range from 6 to 41 µg/L with a mean of 13 µg/L in the south basin. Hypolimnetic TP concentrations in the north basin average 49 µg/L and in the south basin average 18 µg/L. The higher mean hypolimnetic TP concentrations suggest that there is sediment release of TP during stratification in the summer. The tributaries Fernalds Brook A and Fernalds Brook B have elevated TP concentrations.

Time series of the data show a trend of increasing lake productivity. There is an increasing trend in both epilimnetic and hypolimnetic total phosphorus concentrations (NH DES, 2006b). Summer composite chl *a* concentrations have also gradually increased since the initiation of the VLAP in 1988, particularly in the north basin. Secchi disk transparencies have also decreased over the period that VLAP sampling has occurred.

**Table 2-2. Pawtuckaway Lake-North Basin Summer Water Quality Summary Table 2001-2007.**

<b>Statistic</b>	<b>Epi TP</b> (µg/L)	<b>Meta TP</b> (µg/L)	<b>Hypo TP</b> (µg/L)	<b>SDT</b> (m)	<b>Chl <i>a</i>*</b> (µg/L)	<b>DO **</b> (mg/L)
<b>n</b>	35	34	34	29	33	99
<b>Min</b>	5	7	11	1.9	2.1	0.0
<b>Mean</b>	15	15	49	3.3	5.6	3.5
<b>Max</b>	35	26	142	4.8	15.4	9.1
<b>Median</b>	13	13	37	3.3	5.1	1.8

\* Uncorrected for pheophytin.

\*\* DO values are from each discrete observation in the data set regardless of depth.

**Table 2-3. Pawtuckaway Lake-South Basin Summer Water Quality Summary Table 2001-2007.**

<b>Statistic</b>	<b>Epi TP</b> (µg/L)	<b>Hypo TP</b> (µg/L)	<b>SDT</b> (m)	<b>Chl <i>a</i>*</b> (µg/L)	<b>DO **</b> (mg/L)
<b>n</b>	34	35	29	32	62
<b>Min</b>	6	8	2.2	2.5	0.3
<b>Mean</b>	13	18	3.4	5.7	5.3
<b>Max</b>	41	38	5.0	11.9	10.2
<b>Median</b>	11	18	3.5	5.4	6.7

\* Uncorrected for pheophytin.

\*\* DO values are from each discrete observation in the data set regardless of depth.

**Table 2-4. Pawtuckaway Lake Tributary Water Quality Summary Parameters 2001-2006.**

Statistic	Fernalds Brook B TP (µg/L)	Fernalds Brook A TP (µg/L)	Back Creek B TP (µg/L)	Fundy Brook TP (µg/L)	Mountain Cove Brook TP (µg/L)	Round Pond Brook TP (µg/L)	Whites Grove Brook TP (µg/L)
<b>n</b>	3	22	27	28	28	29	17
<b>Min</b>	13	94	12	15	16	11	14
<b>Mean</b>	1008	322	32	35	39	28	27
<b>Max</b>	2000	2168	105	72	70	119	66
<b>Median</b>	1010	179	28	33	40	24	19

n = number of samples; Epi = epilimnion; Meta = metalimnion; Hypo = hypolimnion; SDT= Secchi Disk Transparency, Chl a = Chlorophyll a, DO= Dissolved Oxygen

\* Uncorrected for phaeophytin

\*\* DO values are from each discrete observation in the data set regardless of depth

## 2.2 Designated Uses

Pawtuckaway Lake is assigned a surface water classification of B by the State of New Hampshire. Surface water classifications establish designated uses for a waterbody. Designated uses are desirable uses that must be protected, but are not specifically associated with quantifiable water quality standards. According to RSA 485-A:8, Class B waters, “shall be of the second highest quality.” These waters are considered acceptable for fishing, swimming and other recreational purposes and may be used as water supplies after adequate treatment.

As indicated above, State statute (RSA 485-A:8) is somewhat general with regards to designated uses for New Hampshire surface waters. Upon further review and interpretation of the regulations (Env-Wq 1700), the general uses can be expanded and refined to include the seven specific designated uses shown in Table 2-5 (NH DES 2008a).

**Table 2-5. Designated Uses for New Hampshire Surface Waters**

Designated Use	NH DES Definition	Applicable Surface Waters
Aquatic Life	Waters that provide suitable chemical and physical conditions for supporting a balanced, integrated and adaptive community of aquatic organisms.	All surface waters
Fish Consumption	Waters that support fish free from contamination at levels that pose a human health risk to consumers.	All surface waters
Shellfish Consumption	Waters that support a population of shellfish free from toxicants and pathogens that could pose a human health risk to consumers	All tidal surface waters
Drinking Water Supply After Adequate Treatment	Waters that with adequate treatment will be suitable for human intake and meet state/federal drinking water regulations.	All surface waters

Designated Use	NH DES Definition	Applicable Surface Waters
Primary Contact Recreation (i.e. swimming)	Waters suitable for recreational uses that require or are likely to result in full body contact and/or incidental ingestion of water	All surface waters
Secondary Contact Recreation	Waters that support recreational uses that involve minor contact with the water.	All surface waters
Wildlife	Waters that provide suitable physical and chemical conditions in the water and the riparian corridor to support wildlife as well as aquatic life.	All surface waters

### 2.3 Applicable Water Quality Standards

The New Hampshire State Water Quality Standards for nutrients in Class B waters (Env-Wq 1703.14) are:

- (1) Class B waters shall contain no phosphorus in such concentrations that would impair any existing or designated uses, unless naturally occurring.
- (2) Existing discharges containing either phosphorus or nitrogen that encourage cultural eutrophication shall be treated to remove phosphorus or nitrogen to ensure attainment and maintenance of water quality standards.
- (3) There shall be no new or increased discharge of phosphorus into lakes or ponds.
- (4) There shall be no new or increased discharge(s) containing phosphorus or nitrogen to tributaries of lakes or ponds that would contribute to cultural eutrophication or growth of weeds or algae in such lakes and ponds.

Applicable water quality standards for DO include the following:

Env-Wq 1703.07 (b): Except as naturally occurs, or in waters identified in RSA 485-A:8, III, or subject to (c) below, Class B waters shall have a DO content of at least 75% of saturation, based on a daily mean, and an instantaneous minimum DO concentration of at least 5 mg/L.

Env-Wq 1703.07 (d): Unless naturally occurring or subject to (a) above, surface waters within the top 25 percent of depth of thermally unstratified lakes, ponds, impoundments and reservoirs or within the epilimnion shall contain a DO content of at least 75 percent saturation, based on a daily mean and an instantaneous minimum DO content of at least 5 mg/L. Unless naturally occurring, the DO content below those depths shall be consistent with that necessary to maintain and protect existing and designated uses.

The NH DES policy for interim nutrient threshold for primary contact recreation (i.e. swimming) in NH lakes is 15 µg/L chl *a* (NH DES, 2008a). Lakes were also listed as impaired for swimming if surface blooms (or “scums”) of cyanobacteria were present. A lake was listed even if scums were present only along a downwind shore.

### 2.4 Anti-degradation Policy

Anti-degradation provisions are designed to preserve and protect the existing beneficial uses of New Hampshire’s surface waters and to limit the degradation allowed in receiving waters. Anti-degradation regulations are included in Part Env-Wq 1708 of the New Hampshire Surface Water Quality Regulations. According to Env-Wq 1708.02, anti-degradation applies to the following:

- All new or increased activity including point and nonpoint source discharges of pollutants that would lower water quality or affect the existing or designated uses;



- A proposed increase in loading to a waterbody when the proposal is associated with existing activities;
- An increase in flow alteration over an existing alteration; and
- All hydrologic modifications, such as dam construction and water withdrawals.

## 2.5 Priority Ranking and Pollutant of Concern

Pawtuckaway Lake (NHLAK600030704-02-01) is on the 2006 and 2008 303(d) list as having an aquatic life use impairment due to low DO saturation and primary contact recreation use impairment due to the presence of hepatotoxic microcystins (NH DES, 2006a, 2008b). Pawtuckaway Lake periodically experiences cyanobacteria blooms in summer. Pawtuckaway Lake is listed as a low priority for TMDL development by the NH DES. This preliminary ranking is based on the waterbody impairment and whether the pollutants pose a threat to human health or to federally listed, threatened or endangered species (NH DES, 2008a). The final ranking takes into account public interest/support, availability of resources for development, administrative or legal factors, and likelihood of implementation. When the 2006 303(d) lists were prepared, it was unknown if funding would be available for development of this TMDL; consequently it was given a low ranking at the time. Designated use impairment is also ranked. Pawtuckaway Lake is listed as marginally impaired (category 5-M) for aquatic life due to low DO saturation. Primary contact recreation is listed as marginally impaired (5-M) due to the presence of hepatotoxic cyanobacteria. It is likely that the impairments observed in Pawtuckaway Lake are attributable to nutrient enrichment, specifically TP. Control of TP sources to Pawtuckaway Lake should therefore improve conditions related to hepatotoxic cyanobacteria and DO such that designated uses are supported. A summary of the impairments and causes of impairment are presented in Table 2-1.

## 2.6 Numeric Water Quality Target

To develop a TMDL for this waterbody, it is necessary to derive a numeric TP target value (e.g., in-lake concentration) for determining acceptable nutrient loads. The suggested TP values are described in the following paragraphs. The derivation of these targets and discussion of alternative approaches in setting targets are presented in Appendix A. It is notable that all three approaches presented result in very similar target concentrations.

At present, numeric criteria for TP do not exist in New Hampshire's state water quality regulations. Accordingly, best professional judgment of AECOM, NH DES, and US EPA Region 1 was employed to select a quantitative target in-lake TP concentration that will attain the narrative water quality standard. Wind accumulation of surface blooms or "scum" can be cause for impairment in New Hampshire lakes. It is difficult to relate the presence of these scums to TP loads. However, setting a TP target based in part on minimizing the probability of excessive summer chl *a* should be sufficient to minimize scum formation related to cyanobacteria blooms. Reducing algal productivity through control of TP should also reduce hypolimnetic DO depletion.

The numeric (in-lake) water quality target for TP for Pawtuckaway Lake is 12 µg/L, based on the discussion presented in Appendix A. The target is set based on an analysis of the observed TP concentrations from a set of impaired and a set of unimpaired lakes in New Hampshire. The target number is supported by evaluation of the Trophic State Indices (TSI) developed by Carlson (1977) and a probabilistic assessment of the likelihood of blooms (Walker 1984, 2000). The "weight of evidence" suggests that 12 µg/L is an appropriate target that will allow Pawtuckaway Lake to support its designated uses. This target incorporates an MOS (described further in Section 5.3). The target is based primarily on summer data but the TMDL is being calculated based on mean annual conditions. The target concentration corresponds to non-bloom conditions, as reflected in suitable (designated use support) measures of both SDT and chl *a*.

### 3.0 ENSR-LRM Model of Current Conditions


Current TP loading was assessed using the ENSR-LRM methodology, which is a land use export coefficient model developed by AECOM for use in New England and modified for New Hampshire lakes by incorporating New Hampshire land use TP export coefficients when available and adding septic system loading into the model (CT DEP and ENSR, 2004). Documentation for ENSR-LRM is provided in Appendix B.

The major direct and indirect nonpoint sources of TP to Pawtuckaway Lake include:

- Atmospheric deposition (direct precipitation to the lake);
- Surface water base flow (dry weather tributary flows, including any groundwater seepage into streams from groundwater);
- Stormwater runoff (runoff draining to tributaries or directly to the lake);
- Internal recycling (release from sediment by chemical interaction) ;
- Waterfowl (direct input from resident and migrating birds);
- Direct groundwater seepage including septic system inputs from shorefront residences.

There are no permitted point source discharges of nutrients in this watershed. However, construction activities in the watershed that disturb greater than one acre of land and convey stormwater through pipes, ditches, swales, roads or channels to surface water require a federal General Permit for Stormwater Discharge from Construction Activities. However, construction discharges are not incorporated in the model due to their variability and short-term impacts.

The watershed of Pawtuckaway Lake was divided into 14 subwatersheds based on tributary inputs and topography (Figure 3-1). These basins include Back Creek A, Back Creek B, Fundy Brook, Fernalds A, Fernalds B, Whites Grove Brook, Grove Dam Brook, Burnhams Marsh North, Burnhams Marsh South, Loon Cove A, Loon Cove B, Mountain Cove Brook, Round Pond Brook, and the Pawtuckaway Lake Direct Drainage. TP loads were estimated for each subwatershed based on runoff and groundwater land use export coefficients. The TP loads were then attenuated as necessary to match tributary monitoring data, if available. If no tributary data were available or current, then the attenuation factor was based on the slope, soils, and wetlands. Loads from the watershed as well as direct sources were then used to predict in-lake concentrations of TP, chl *a*, SDT, and algal bloom probability. The estimated load and in-lake predictions were then compared to in-lake concentrations. The attenuation factors for each subwatershed were used as calibration tools to achieve a close agreement between predicted in-lake TP and observed mean/median TP. However, perfect agreement between modeled concentrations and monitoring data were not expected as monitoring data are limited for some locations and are biased towards summer conditions when TP concentrations are expected to be lower than the annual mean predicted by the loading model.

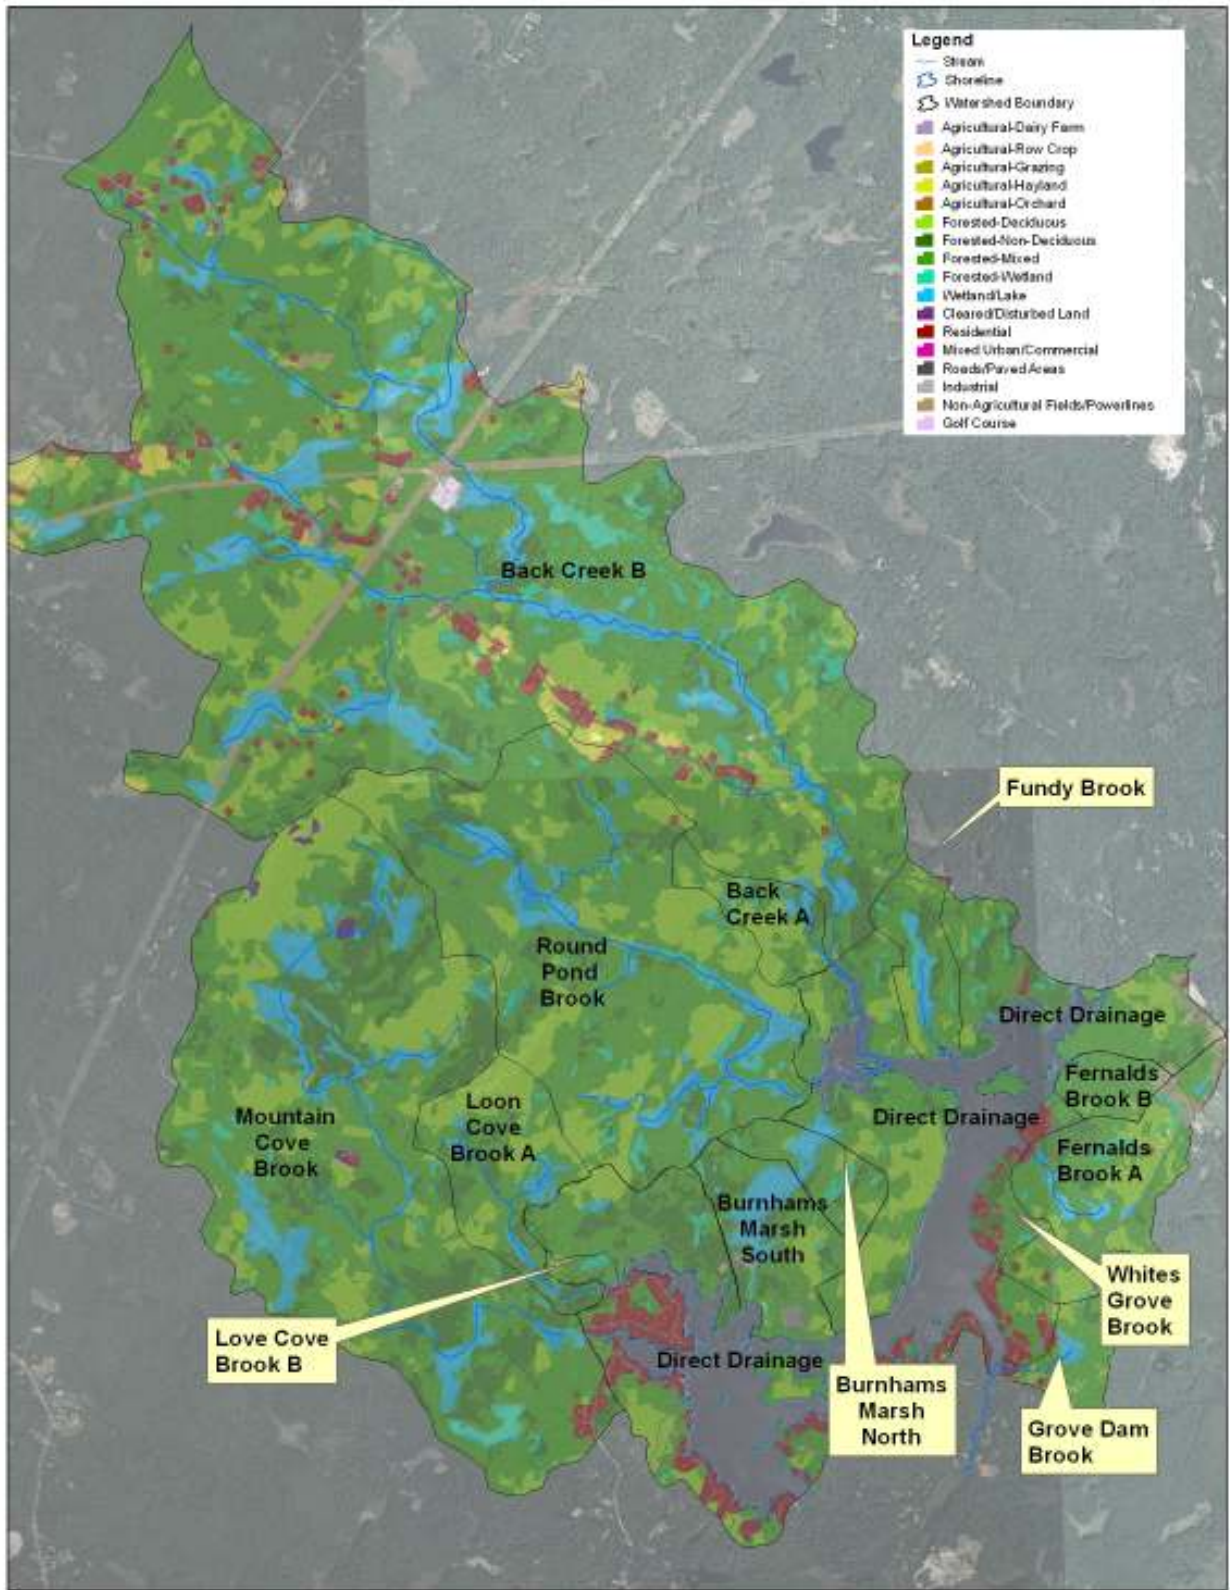

0 0.25 0.5 0.75 1 Miles

ENSR | AECOM

Proj# 09090-107



**Notes:**

- 1) Aerial photo base map from 2003 National Agricultural Imagery Program (NAIP); obtained from NHGRANIT.
- 2) Land use polygons were compiled by ENSR from Land Use polygon data, Land Cover raster data, and National Wetlands Inventory (NWI) data obtained from

**FIGURE 3-1  
Land Use  
Pawtuckaway Lake  
Nottingham, NH**

**Figure 3-1. Pawtuckaway Lake Watershed Land Use.**



### 3.1 Hydrologic Inputs and Water Loading

Calculating TP loads to Pawtuckaway Lake requires estimation of the sources of water to the lake. The three primary sources of water are: 1) atmospheric direct precipitation; 2) runoff, which includes all overland flow to the tributaries and direct drainage to the lake; and 3) baseflow, which includes all precipitation that infiltrates and is then subsequently released to surface water in the tributaries or directly to the lake (i.e., groundwater). Baseflow is roughly analogous to dry weather flows in streams and direct groundwater discharge to the lake. The water budget is broken down into its components in Table 3-1.

- Precipitation - Mean annual precipitation was assumed to be representative of a typical hydrologic period for the watershed. The annual precipitation value was derived from the USGS publication: Open File Report 96-395, "Mean Annual Precipitation and Evaporation - Plate 2", 1996 and confirmed with precipitation data from weather stations in Epping, Durham, and Concord. For the Pawtuckaway Lake watershed, 1.05 m of annual precipitation was used.
- Runoff - For each landuse category, annual runoff was calculated by multiplying mean annual precipitation by basin area and a land use specific runoff fraction. The runoff fraction represents the portion of rainfall converted to overland flow.
- Baseflow - The baseflow calculation was calculated in a manner similar to runoff. However, a baseflow fraction was used in place of a runoff fraction for each land use. The baseflow fraction represents the portion of rainfall converted to baseflow.

Runoff and baseflow fractions from Dunn and Leopold (1978) were assumed to be representative for NH land uses and are listed in Tables C-1 and C-2 in Appendix C. The hydrologic budget was calibrated to a representative standard water yield for New England (Sopper and Lull, 1970; Higgins and Colonell 1971, verified by assessment of yield from various New England USGS flow gauging stations). The water load was attenuated (reduced) 16% in order to account for the presence of wetland complexes in all of the subwatersheds and achieve better agreement with the standard water yield for New England. The attenuation was also verified based on best professional judgment and guidance from the Center for Watershed Protection (2000). Table C-8 provides a detailed comparison of the attenuation factors and the standard water yields in which the hydrologic budgets were calibrated against. More detail on the methodology for hydrologic budget estimation and calibration is presented in Appendix B.

**Table 3-1. Pawtuckaway Lake Water Budget.**

WATER BUDGET	M <sup>3</sup> /YR
Atmospheric	3,323,252
Watershed Runoff	12,145,642
Watershed Baseflow	17,093,368
Total	32,562,262

### 3.2 Nutrient Inputs

#### *Land Use Export*

The Pawtuckaway Lake watershed and subwatershed boundaries were delineated using NH DES delineations and corrected with USGS topographic maps when necessary (NH DES, 2007). Land uses within the watershed were determined using several sources of information including: (1) Geographic Information System (GIS) data, (2) analysis of aerial photographs and (3) ground truthing (when appropriate).

The TP load for each subbasin was calculated using export coefficients for each land use type. The subbasin loads were adjusted based upon proximity to the lake, soil type, presence of wetlands, and attenuation provided by Best Management Practices (BMPs) for water or nutrient export mitigation. The watershed load (baseflow and runoff) was combined with direct loads (atmospheric, internal load, septic system, and waterfowl) to calculate TP loading. The generated load to the lake was then input into a series of empirical models that provided predictions of in-lake TP concentrations, chl *a* concentrations, algal bloom frequency and water clarity. Details on model input parameters and major assumptions used to estimate the baseline loading (i.e., existing conditions) for Pawtuckaway Lake are described below.

- Areal land use estimates were generated from land use and land cover GIS data layers from NH GRANIT. For Pawtuckaway Lake, data sources are: 1998 Rockingham County Land Use layer, the 2001 NH Land Cover Assessment layer © Complex Systems Research Center, University of New Hampshire, and National Wetland Inventory (1971-1992). Land use categories were matched with the ENSR-LRM land use categories and their respective TP export coefficients. Table C-3 lists ENSR-LRM land use categories in which the GRANIT categories were matched. Land cover data and aerial photographs were used to determine certain land use classifications, such as agriculture and forest types. Selected land uses were confirmed on the ground during a watershed survey. Watershed land use is presented spatially in Figure 3-1 and summarized in Tables 3-2.
- TP export coefficient ranges were derived from values summarized by Reckhow, et al. (1980), Dudley et al. (1997) as cited in ME DEP (2003) and Schloss and Connor (2000). Table C-3 provides land uses while Table C-4 provides ranges for export coefficients and provides the runoff and baseflow export coefficient for each land use category in Pawtuckaway Lake and the sources for each export coefficient.
- Areal loading estimates were attenuated within the model based on natural features such as porous soils, wetlands or by anthropogenic sources, such as implemented physical BMPs that would decrease loading. Many of the major tributaries to Pawtuckaway Lake have extensive associated wetlands throughout the watershed and toward the mouth of the tributaries. These wetlands are expected to spread the flow and encourage water infiltration, settling and adsorption of TP. The attenuation factors applied to each subwatershed are listed in Table C-8. Back Creek B has the largest extent of wetlands, so the subwatershed was given an attenuation factor of 30%, meaning that 70% of the generated TP load is actually delivered to the lake. Mountain Brook Cove also has extensive wetlands associated with the tributary and its TP load was attenuated 25%. Due to the extent and location of wetlands, a TP attenuation factor of 20% was applied to the Fernalds A, Fundy Brook, Burnhams-North, Burnhams-South, White Grove Brook, and Grove Dam Brook subwatersheds. Back Creek A subwatershed was attenuated 10% and Loon Cove A was attenuated 15% in order to reduce the TP load to more closely match the available tributary data. A TP attenuation factor of 5% was applied to the Fernalds Brook B watershed due to moderately steep topography and lack of wetland complexes in the subwatershed. No TP attenuation factor was applied to Loon Cove Brook B and Direct Drainage subwatershed due to the lack of wetland complexes and the presence of residential development along the shoreline. An additional 20% was added to the Round Pond subwatershed TP load due to the possible flushing of the hypereutrophic pond during rain events. AECOM also checked attenuation factors against available tributary data for calibration.
- Lake Pawtuckaway is typically drawn down 7 ft in the fall each year. Watersheds in close proximity to the two outlets include Fernalds Brook A, Fernalds Brook B, Fundy Brook, and Direct Drainage. The TP loads of these watersheds were attenuated an additional 40% because the loads essentially run out of the lake during the winter and as such will not influence the in-lake water quality as greatly as the watersheds with tributaries discharging near the deeper areas of the lake. Table C-8 includes these additional attenuations.

**Table 3-2. Land Use Categories by Pawtuckaway Lake Subwatersheds.**

	Area (Hectares)						
	Back Creek A Subwatershed	Back Creek B Subwatershed	Burnhams-North Subwatershed	Burnhams-South Subwatershed	Fernalds Brook A Subwatershed	Fernalds Brook B Subwatershed	Fundy Subwatershed
Urban 1 (Residential)	0.0	74.7	0.0	0.0	1.5	0.0	0.4
Urban 2 (Mixed Urban/Commercial)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Urban 3 (Roads)	0.0	10.1	0.0	5.0	1.6	0.0	0.2
Urban 4 (Industrial)	0.0	4.7	0.0	0.0	0.0	0.0	0.0
Urban 5 (Parks, Recreation Fields, Institutional)	0.0	54.3	0.0	0.0	0.0	0.0	0.0
Agric 3 (Grazing)	0.0	0.0	0.0	0.0	5.4	1.6	0.0
Agric 4 (Hayland-Manure)	0.0	40.6	0.0	0.0	0.0	0.0	0.0
Agric 5 (Dairy Farm)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Forest 1 (Deciduous)	21.7	294.1	5.1	11.0	28.6	1.6	9.7
Forest 2 (Non-Deciduous)	4.5	150.1	5.3	19.4	12.1	0.5	9.2
Forest 3 (Mixed Forest)	26.6	1159.8	32.4	52.1	72.3	30.1	33.8
Forest 4 (Wetland)	1.9	79.2	4.2	1.9	4.7	0.0	2.8
Open 1 (Wetland / Pond)	3.6	183.9	6.5	19.8	6.6	0.0	8.9
Open 2 (Meadow)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Open 3 (Bare/Open)	0.0	0.2	0.0	0.0	0.0	0.0	0.0
<b>TOTAL</b>	<b>58.3</b>	<b>2051.7</b>	<b>53.5</b>	<b>109.2</b>	<b>132.9</b>	<b>33.9</b>	<b>64.9</b>

Table 3-2 (Continued).

	Area (Hectares)						
	Grove Dam Subwatershed	Loon Brook A Subwatershed	Loon Brook B Subwatershed	Mountain Cove Subwatershed	Round Subwatershed	White Grove Subwatershed	Direct Pond Subwatershed
Urban 1 (Residential)	2.2	0.0	0.0	7.3	1.2	1.0	89.1
Urban 2 (Mixed Urban/Commercial)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Urban 3 (Roads)	0.0	0.2	0.1	2.1	0.8	0.5	11.5
Urban 4 (Industrial)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Urban 5 (Parks, Recreation Fields, Institutional)	0.0	0.0	0.0	0.0	0.0	0.0	0.4
Agric 3 (Grazing)	0.0	0.0	0.0	0.0	0.0	0.0	8.4
Agric 4 (Hayland-Manure)	0.0	0.0	0.0	0.0	3.0	0.0	0.0
Agric 5 (Dairy Farm)	0.0	0.0	0.0	0.0	0.0	0.0	0.9
Forest 1 (Deciduous)	8.4	43.0	1.2	174.1	142.7	12.8	108.7
Forest 2 (Non-Deciduous)	1.6	21.8	1.2	183.7	54.4	0.1	85.1
Forest 3 (Mixed Forest)	29.2	57.9	6.6	451.2	377.2	10.0	322.7
Forest 4 (Wetland)	0.4	2.0	1.7	22.2	21.0	0.2	9.6
Open 1 (Wetland / Pond)	3.5	10.6	0.0	90.7	63.4	0.0	7.1
Open 2 (Meadow)	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Open 3 (Bare/Open)	0.0	0.0	0.0	6.3	0.0	0.0	0.0
<b>TOTAL</b>	<b>45.3</b>	<b>135.5</b>	<b>10.8</b>	<b>937.6</b>	<b>663.6</b>	<b>24.6</b>	<b>643.4</b>

## Atmospheric Deposition

Nutrient inputs from atmospheric deposition were estimated based on a TP coefficient for direct precipitation. The atmospheric load of 0.25 kg/ha/yr includes both the mass of TP in rainfall and the mass in dryfall (Wetzel, 2001). The sum of these masses is carried by rainfall. The concentration calculated for use in the loading estimate 23.8 µg/L is similar to the mean concentration (25 µg/L) observed in rainfall in Concord, NH (NH DES, 2008 Unpublished Data). The coefficient was then multiplied by the lake area (ha) in order to obtain an annual atmospheric deposition TP load. The contribution of atmospheric deposition to the annual TP load to Pawtuckaway Lake was estimated to be 79.3 kg/yr or 10% of the total load.

## Internal Loading

Internal loading of TP to Pawtuckaway Lake was estimated using lake volume-weighted mass differences between early and late summer periods from available water column TP and DO data. DO profiles during late summer were chosen to determine the depth of the anoxic zone. The area of the lake with potential anoxic zones was determined using GIS analysis of bathymetric maps (Figure 2-1). Internal TP loading was estimated as the difference between the hypolimnetic concentrations in September and prestratification concentrations in May for 2001-2007, 0.04 mg/L, multiplied by the volume of the hypolimnion in August (Table C-5). Internal loading of TP to Pawtuckaway Lake was estimated to be 34.1 kg/yr or 4% of the TP load to the lake.

## Septic Systems

TP export loading from residential septic systems was estimated within the 125 ft shoreline zone. The 125 ft zone is the minimum distance from lakes that new septic systems are allowed in New Hampshire with rapid groundwater movement through gravel soils. A shoreline survey using GIS ortho-photographs determined the number of residences within the 125 ft zone. It was assumed that if the dwelling was within the 125 ft zone that the septic system was also within the 125 ft zone. The TP load was calculated by multiplying a TP export coefficient (based on literature values for wastewater TP concentrations and expected water use), the number of dwellings, the mean number of people per dwelling, the number of days occupied per year, and an attenuation coefficient (Table C-6). In Pawtuckaway Lake, the TP loading from shoreline septic systems was estimated to be 94.3 kg/yr, which is 12% of the TP load to Pawtuckaway Lake. A more detailed septic survey or groundwater monitoring as suggested in Section 8.0 may yield more precise estimates of septic loading.

The following assumptions were used in estimating the TP load from septic systems.

- Of the 309 residences, 20-percent were estimated to be seasonal and 80-percent were estimated to be year-round (Tom Duffy, personal communication).
- Two and a half people were estimated to reside in each dwelling. It was estimated that each resident uses 65 gallons per day for 365 days per year for year round residents and 90 days for seasonal residents.
- The TP coefficients were calculated based on mean TP concentration in domestic wastewater of 8 mg/L and mean household water uses (Metcalf & Eddy, 1991).
- All septic loads were attenuated 80% (Dudley and Stephenson, 1973; Brown and Associates, 1980) to account for TP uptake in the soil between the septic systems and the lake. This attenuation factor is somewhat lower than the typical literature value in recognition that the most of the soils directly adjacent to the lake are shallow or serve as poor filter for nutrient attenuation (Connor and Landry, 1995). In addition, many of the lakefront houses are located on steep slopes close to the lake.

## Waterfowl

Total phosphorus load from waterfowl was estimated using a TP export coefficient and an estimate of annual mean waterfowl population. 55 birds were estimated to be the mean annual waterfowl population (Tom Duffy, personal communication). The TP export coefficient for mallard ducks, 0.000505 kg/bird/day, was multiplied by 275 non-ice days and the number of waterfowl in order to obtain a TP load of 7.6 kg/yr (Table C-7). This equates to 1 % of the total TP load.

### 3.3 Phosphorus Loading Assessment Summary

The current TP load to Pawtuckaway Lake was estimated to be 797.8 kg/yr from all sources. The TP load according to source is presented in Table 3-4.

Loading from the watershed was overwhelmingly the largest source at 583 kg/yr (73% of the TP load). In particular, TP loading from the largest subwatershed (Back Creek B) was the highest at 246.9 kg/yr (Table 3-4).

Direct precipitation provides approximately 10% of the annual TP load or 79.3 kg/yr while internal loading was estimated to contribute 34.1 kg/yr or 4% of the TP budget. Septic systems contribute 94.3 kg/yr or 12% of the annual TP budget. The TP load from waterfowl is estimated as 7.6 kg/yr or 1% of the annual TP budget.

**Table 3-3. Pawtuckaway Lake Phosphorus Loading Summary.**

TP INPUTS	Modeled Current TP Loading (kg/yr)	% of Total Load
ATMOSPHERIC	79.3	10
INTERNAL	34.1	4
WATER FOWL	7.6	1
SEPTIC SYSTEM	94.3	12
WATERSHED LOAD-BACK CREEK B	246.9	31
WATERSHED LOAD-BACK CREEK A	6.1	1
WATERSHED LOAD-ROUND POND STREAM	89.1	11
WATERSHED LOAD-LOON COVE A	13.3	2
WATERSHED LOAD-MOUNTAIN BROOK	83.7	10
WATERSHED LOAD-FERNALDS BROOK A	10.4	1
WATERSHED LOAD-FUNDY BROOK	3.5	0
WATERSHED LOAD-BURNHAMS-NORTH	4.2	1
WATERSHED LOAD-BURNHAMS-SOUTH	14.2	2
WATERSHED LOAD-LOON COVE B	1.3	0
WATERSHED LOAD-WHITE GROVE	3.7	0
WATERSHED LOAD-FERNALDS BROOK B	2.6	0
WATERSHED LOAD-GROVE DAM	5.2	1
WATERSHED LOAD-DIRECT DRAINAGE	98.6	12
<b>TOTAL</b>	<b>797.8</b>	<b>100</b>

### 3.4 Phosphorus Loading Assessment Limitations

While the analysis presented above provides a reasonable accounting of sources of TP loading to Pawtuckaway Lake, there are several limitations to the analysis:

- Precipitation varies among years and hence hydrologic loading will vary. This may greatly influence TP loads in any given year, given the importance of runoff to loading.
- Spatial analysis has innate limitations related to the resolution and timeliness of the underlying data. In places, local knowledge was used to ensure the land use distribution in the ENSR-LRM model was reasonably accurate, but data layers were not 100% verified on the ground. In addition, land uses were aggregated into classes which were then assigned export coefficients; variability in export within classes was not evaluated or expressed.
- TP export coefficients as well as runoff/baseflow exports were representative but also had limitations as they were not calculated for the study water body, but rather are regional estimates.
- The TP loading estimate from septic systems was limited by the assumptions associated with this calculation described above in the “Septic Systems” subsection.
- Water quality data for Pawtuckaway Lake and its tributaries generally provide good spatial and temporal coverage but are limited at some locations, restricting calibration of the model.

### 3.5 Lake Response to Current Phosphorus Loads

TP load outputs from the ENSR-LRM Methodology were used to predict in-lake TP concentrations using five empirical models. The models include: Kirchner-Dillon (1975), Vollenweider (1975), Reckhow (1977), Larsen-Mercier (1976), and Jones-Bachmann (1976). These empirical models estimate TP from system features, such as depth and detention time of the waterbody. The load generated from the export portion of ENSR-LRM was used in these equations to predict in-lake TP. The mean predicted TP concentration from these models was compared to measured (observed) values. Input factors in the export portion of the model, such as export coefficients and attenuation, were adjusted to yield an acceptable agreement between measured and average predicted TP. Because these empirical models account for a degree of TP loss to the lake sediments, the in-lake concentrations predicted by the empirical models are lower than those predicted by a straight mass-balance (25  $\mu\text{g/L}$ ) where the mass of TP entering the lake is equal to the mass exiting the lake without any retention. Also, the empirical models are based on relationships derived from many other lakes. As such, they may not apply accurately to any one lake, but provide an approximation of predicted in-lake TP concentrations and a reasonable estimate of the direction and magnitude of change that might be expected if loading is altered. These empirical modeling results are presented in Table 3-5.

The TP load estimated using ENSR-LRM methodology translates to predicted mean in-lake concentrations ranging from 11 to 20  $\mu\text{g/L}$ . The mean in-lake TP concentration of the five empirical models was 16  $\mu\text{g/L}$ . The mean epilimnetic P concentration from observed in-lake data from 2001 to 2007 was 15  $\mu\text{g/L}$  in the north basin and 13  $\mu\text{g/L}$  in the south basin. The predicted concentration is close to the observed mean in the north basin and slightly higher than the south basin mean. The slight disagreement between the model results and the in-lake data may be attributable to the time of year of sampling. Nearly all of the monitoring data are from the summer, a time when epilimnetic concentrations are typically lower the mean annual concentrations. The empirical models all predict mean annual TP concentrations assuming fully mixed conditions. Nurnberg (1996) shows summer epilimnetic concentrations as 14% lower than annual concentrations using a dataset of 82 dimictic lakes while Nurnberg (1998) shows a difference of 40% using a dataset of 127 stratified lakes. The mean observed concentration in the south basin of Pawtuckaway Lake (13  $\mu\text{g/L}$ ) is 20% lower than the predicted concentration (16 $\mu\text{g/L}$ ), which is within the range reported in the two Nurnberg studies.

**Table 3-4. Predicted In-lake Total Phosphorus Concentration using Empirical Models.**

<b>Empirical Equation</b>	<b>Equation</b>	<b>Predicted TP (µg/L)</b>
Mass Balance	$TP=L/(Z(F))*1000$	25
Kirchner-Dillon 1975	$TP=L(1-Rp)/(Z(F))*1000$	14
Vollenweider 1975	$TP=L/(Z(S+F))*1000$	20
Larsen-Mercier 1976	$TP=L(1-Rlm)/(Z(F))*1000$	16
Jones-Bachmann 1976	$TP=0.84(L)/(Z(0.65+F))*1000$	17
Reckhow General 1977	$TP=L/(11.6+1.2(Z(F)))*1000$	11
<b>Average of Above 5 Model Values</b>		<b>16</b>
<i>Observed Summer North Epilimnion Mean (2001-2007)</i>		<b>15</b>
<i>Observed Summer North Epilimnion Median (2001-2007)</i>		<b>13</b>
<i>Observed Summer South Epilimnion Mean (2001-2007)</i>		<b>13</b>
<i>Observed Summer South Epilimnion Median (2001-2007)</i>		<b>11</b>

<b>Variable</b>	<b>Description</b>	<b>Units</b>	<b>Equation</b>
L	Phosphorus Load to Lake	g P/m <sup>2</sup> /yr	
Z	Mean Depth	m	Volume/area
F	Flushing Rate	flushings/yr	Inflow/volume
S	Suspended Fraction	no units	Effluent TP/Influent TP
Qs	Areal Water Load	m/yr	Z(F)
Vs	Settling Velocity	m	Z(S)
Rp	Retention Coefficient (settling rate)	no units	$((Vs+13.2)/2)/(((Vs+13.2)/2)+Qs)$
Rlm	Retention Coefficient (flushing rate)	no units	$1/(1+F^{0.5})$

Once TP estimates were derived, annual mean chl a and SDT can be predicted based on another set of empirical equations: Carlson (1977), Dillon and Rigler (1974), Jones and Bachman (1976), Oglesby and Schaffner (1978), Vollenweider (1982), and Jones, Rast and Lee (1979). Bloom frequency was also calculated based on equations developed by Walker (1984, 2000) using a natural log mean chl a standard deviation of 0.5. These predictions are presented in Table 3-6.



**Table 3-5. Predicted In-lake Chlorophyll a and Secchi Disk Transparency Predictions based on an Annual Average In-lake Phosphorus Concentration of 12 µg/L.**

Empirical Equation	Equation	Predicted Value
<b>Mean Chlorophyll</b>		<b>µg/L</b>
Carlson 1977	$Chl=0.087*(Pred\ TP)^{1.45}$	4.7
Dillon and Rigler 1974	$Chl=10^{(1.449*LOG(Pred\ TP)-1.136)}$	3.9
Jones and Bachmann 1976	$Chl=10^{(1.46*LOG(Pred\ TP)-1.09)}$	4.5
Oglesby and Schaffner 1978	$Chl=0.574*(Pred\ TP)^{-2.9}$	6.0
Modified Vollenweider 1982	$Chl=2*0.28*(Pred\ TP)^{0.96}$	7.8
<b>Average of Model Values</b>		<b>5.4</b>
<b>North Basin Observed Summer Mean (2001-2007)</b>		<b>5.6</b>
<b>South Basin Observed Summer Mean (2001-2007)</b>		<b>5.5</b>
<b>Peak Chlorophyll</b>		<b>µg/L</b>
Modified Vollenweider (TP) 1982	$Chl=2*0.64*(Pred\ TP)^{1.05}$	22.9
Vollenweider (CHL) 1982	$Chl=2.6*(AVERAGE(Pred\ Chl))^{1.06}$	15.5
Modified Jones, Rast and Lee 1979	$Chl=2*1.7*(AVERAGE(Pred\ Chl))+0.2$	18.5
<b>Average of Model Values</b>		<b>19.0</b>
<b>North Basin Observed Summer Maximum (2001-2007)</b>		<b>15.4</b>
<b>South Basin Observed Summer Maximum (2001-2007)</b>		<b>11.9</b>
<b>Bloom Probability</b>		<b>% of Summer</b>
Probability of Chl >15 µg/L	See Walker 1984 & 2000	1.1%
<b>Secchi Transparency</b>		<b>m</b>
Mean: Oglesby and Schaffner 1978	$Chl=10^{(1.36-0.764*LOG(Pred\ TP))}$	2.8
Max: Modified Vollenweider 1982	$Chl=9.77*Pred\ TP^{-0.28}$	4.5
<b>North Basin Observed Summer Mean (2001-2007)</b>		<b>3.3</b>
<b>South Basin Observed Summer Mean (2001-2007)</b>		<b>3.4</b>
<b>North Basin Observed Summer Maximum (2001-2007)</b>		<b>4.8</b>
<b>South Basin Observed Summer Maximum (2001-2007)</b>		<b>5.0</b>

Variable	Description	Units
"Pred TP"	The average TP calculated from the 5 predictive equation models in Table 3-5	µg/L
"Pred Chl"	The average of the 3 predictive equations calculating mean chlorophyll	µg/L

\*The observed summer maximum is based on n= 33 and is not necessarily the peak chlorophyll a.

## 4.0 Total Maximum Daily Load

### 4.1 Maximum Annual Load

The annual load capacity is defined by the US EPA in 40 CFR § 130.2(f) as, “The greatest amount of loading that a water can receive without violating water quality standards.” The loading capacity is to be protective even during critical conditions, such as summertime conditions for TP loading to nutrient enriched lakes. The ENSR-LRM loading and lake response model was used to calculate the target annual TP load in (kg TP/yr) from the 12 µg/L target in-lake TP concentration discussed in Section 2.6. The TP loads that could practically be reduced were decreased until the target TP in-lake concentration was achieved. Further documentation of the ENSR-LRM model can be found in Appendix B.

The total maximum annual TP load that is expected to result in an in-lake annual mean TP concentration of 12 µg/L was estimated to be 612.4 kg/yr, which represents a 23% reduction from existing conditions (Table 4-1).

### 4.2 Maximum Daily Load

Although a daily loading timescale is not meaningful for ecological prediction or long-term watershed management of lakes, this TMDL will present daily pollutant loads of TP in addition to the annual load. US EPA believes that there is some flexibility in how the daily loads may be expressed (US EPA, 2006). Several of these options are presented in “Options for Expressing Daily Loads in TMDLs” (US EPA, 2007).

The Pawtuckaway Lake dataset and associated empirical model necessitates a statistical estimation of a maximum daily load because long periods of continuous simulation data and extensive flow and loading data are not available. US EPA (2007) provides such an approach.

The following expression assumes that loading data are log-normal distributed and is based on a long term mean load calculated by the empirical model and an estimation of the variability in loading.

$$\text{MDL} = \text{LTA} * e^{[z\sigma - 0.5\sigma^2]}$$

Where:

MDL = maximum daily limit

LTA = long-term average

Z = z-statistic of the probability of occurrence

$\sigma^2 = \ln(\text{CV}^2 + 1)$

CV = coefficient of variation

For the Pawtuckaway Lake TMDL a coefficient of variation (CV) of 1.1 and a 95% probability level of occurrence ( $z = 1.64$ ) were used. The CV was calculated as the mean of the CV of loading from 18 subwatersheds draining to Goose Pond and Bow Lake in New Hampshire (Schloss, 2008 unpublished data). The long term average (LTA) load of 1.7 kg/day was calculated by dividing the targeted annual load of 612.4 kg (see Sections 4.6 and 5.0 below) by 365 days. The total maximum daily load of TP is 4.9 kg/day, or approximately 10.8 lbs/day.

### 4.3 Future Development

Since the human population within a watershed may continue to grow and contribute additional TP to the impaired lakes, TMDLs often include an allocation for growth and associated future TP loading. For example, in Maine, target TP loading from anticipated future development is equivalent to a 1.0 µg/L change in in-lake TP concentration (Dennis et al. 1992). However, the NH water quality regulation Env-Wq 1703.3(a) General Water Quality Criteria states, “The presence of pollutants in the surface waters shall not justify further introduction of pollutants from point and/or nonpoint sources.” With regard to at least impaired waterbodies, it

is the policy of NH DES that existing loads due to development are held constant, allowing no additional loading. In order for any future allocation of pollutant load(s) to be granted for an impaired waterbody, the load would need to be reduced elsewhere in the watershed. Given the antidegradation statement above (Section 2.4), this TMDL has been developed assuming no future increase in TP export from these impaired watersheds. However, it should be recognized that the NH DES has no mechanism for regulation/enforcement of TP export from developments of single house lots that do not require a Section 401 Water Quality Certification or fall under the thresholds for alteration of terrain permits (100,000 square feet of disturbance or 50,000 square feet within 250 feet of a lake). Municipalities can, however, regulate such development by revising their land use ordinances/regulations to require no additional loading of TP from new development.

#### **4.4 Critical Conditions**

Critical conditions in Pawtuckaway Lake typically occur during the summertime, when the potential (both occurrence and frequency) for nuisance algal blooms are greatest. The loading capacity for TP was set to achieve desired water quality standards during this critical time period and also provide adequate protection for designated uses throughout the year. This was accomplished by using a target concentration based on summer epilimnetic data and applying it as mean annual concentration in the predictive models used to establish the mean annual maximum load. Since summer epilimnetic values are typically about 20% less than mean annual concentrations (Nurnberg 1996, 1998), an annual load allocation based on mean annual concentrations will be sufficiently low to protect designated uses impacted by TP in the critical summer period.

#### **4.5 Seasonal Variation**

As explained in Section 4.4, the Pawtuckaway Lake TMDL takes into account seasonal variations because the target annual load is developed to be protective of the most sensitive (i.e., biologically responsive) time of year (summer), when conditions most favor the growth of algae.

#### **4.6 Reduction Needed**

Current TP loading and in-lake concentrations are greater than required to support designated uses. The target TP concentration established in Section 2.6 was set in order to ensure that designated uses were supported. The degree of TP load reduction required to meet designated uses is calculated by subtracting the target load (Section 4.1) from the existing load estimated with ENSR-LRM (Section 3.3). Percent reductions are summarized in Table 4-1 while the model results for the target loading scenario are in Table C-12 in Appendix C.

Using the estimated annual target load presented in Section 4.1, the TP load needs to be reduced to 612.1 kg/yr or a mean of 1.7 kg/d. Based on the daily analysis requirement discussed in Section 4.2, the maximum daily load should be <4.9 kg/d in order to meet the water quality target of 12 µg/L. This would require an overall reduction of 23% in the total load (including atmospheric, internal, septic, and total watershed load). As some sources are less controllable than others, the actual reduction to be applied to achieve this goal will vary by source (see Section 5 TMDL Allocation). A 0-38% reduction from manageable watershed sources and a 25% reduction in the septic loading would be required to achieve the 12 µg/L target TP concentration (Table 4-1). Some of the watersheds were reduced to predevelopment loads and the remaining watersheds were reduced 38%. Alternative loading reduction scenarios are discussed further in Section 6.0 below.

**Table 4-1. Pawtuckaway Lake Total Phosphorus Load at Target Criteria of 12 µg/L.**

TP INPUTS	Target TP Loading (kg/yr)	Current TP Loading (kg/yr)	% Reduction
ATMOSPHERIC	79.3	79.3	0%
INTERNAL	34.1	34.1	0%
WATER FOWL	3.8	7.6	50%
SEPTIC SYSTEM	70.7	94.3	25%
WATERSHED LOAD-BACK CREEK B	153.4	246.9	38%
WATERSHED LOAD-BACK CREEK A	6.1	6.1	0%
WATERSHED LOAD-ROUND POND STREAM	84.7	89.1	5%
WATERSHED LOAD-LOON COVE A	13.0	13.3	2%
WATERSHED LOAD-MOUNTAIN BROOK	73.7	83.7	12%
WATERSHED LOAD-FERNALDS BROOK A	6.9	10.4	34%
WATERSHED LOAD-FUNDY BROOK	3.2	3.5	8%
WATERSHED LOAD-BURNHAMS-NORTH	4.2	4.2	0%
WATERSHED LOAD-BURNHAMS-SOUTH	8.9	14.2	38%
WATERSHED LOAD-LOON COVE B	1.1	1.3	10%
WATERSHED LOAD-WHITE GROVE	2.5	3.7	33%
WATERSHED LOAD-FERNALDS BROOK B	1.9	2.6	27%
WATERSHED LOAD-GROVE DAM	3.8	5.2	28%
WATERSHED LOAD-DIRECT DRAINAGE	61.1	98.6	38%
<b>TOTAL</b>	<b>612.4</b>	<b>797.8</b>	<b>23%</b>

#### 4.7 TMDL Development Summary

There is currently no numerical water quality standard for TP in the State of New Hampshire. However, the relationship between TP and algal biomass is well documented in scientific literature. This TMDL was therefore developed for TP and is designed to protect Pawtuckaway Lake and its designated uses impacted by the presence of potentially hepatotoxic cyanobacteria.

To derive the numerical TP target concentration of 12 µg/L criteria, AECOM, the NH DES and EPA considered the following options: (1) examination of the distribution of TP concentrations in impaired and unimpaired lakes in New Hampshire; (2) use of nutrient levels for commonly-accepted trophic levels; and (3) use of probabilistic equations to establish targets to reduce risk of adverse conditions. All three approaches yield a similar target value. Because the first option uses data from New Hampshire lakes, it is viewed as the primary target setting method. The other two methods confirm the result of the first method, a target of 12 µg/L is appropriate. This target would lead to the desired low probability of algal blooms and a mean chl *a* level that supports all expected lake uses while incorporating a margin of safety (discussed in Section 5.3). Additional information regarding the three above listed approaches is documented in Appendix A.

In conclusion, water quality was linked to TP loading by:

- Choosing a preliminary target in-lake TP level, based on historic state-wide and in-lake water quality data, best professional judgment, and through consultation with NH DES and US EPA sufficient to attain water quality standards and support designated uses. The preliminary in-lake TP concentration target is 12 µg/L.

- Using the mean of five empirical models that link in-lake TP concentration and load, calibrated to lake-specific conditions, to estimate the load responsible for observed in-lake TP concentrations.
- Determining the overall mean annual in-lake TP concentration from those models, given that the observed in-lake concentrations may represent only a portion of the year or a specific location within the lake.
- Using the predicted mean annual in-lake TP concentration to predict Secchi disk transparency, chl *a* concentration and algal bloom frequency.
- Using the aforementioned empirical models to determine the TP load reduction needed to meet the numeric concentration target.
- Using a GIS-based spreadsheet model to provide a relative estimate of loads from watershed land areas and uses under current and various projected scenarios to assist stakeholders in developing TP reduction strategies.

Documentation of the model approach is presented in Appendix B. This approach is viewed as combining an appropriate level of modeling with the available water quality and watershed data to generate a reasonably reliable estimate of TP loading and concentration under historic, current, and potential future conditions. It offers a rational estimate of the direction and magnitude of change necessary to support the designated uses protected by New Hampshire.

## 5.0 TMDL Allocation

The allocations for the Pawtuckaway Lake TMDL are expressed as both annual loads and daily loads. However, annual loads better align with design and implementation of watershed and lake management strategies. The TMDL requires an allocation of the total load of the resource. The allocation includes a waste load allocation (WLA), load allocation (LA), and margin of safety (MOS). The sum of these allocations is equal to the target annual load or TMDL for the resource. Each of these allocations is defined in detail in the following subsections. Seasonal variation is also included in the loading allocations.

The equation for the Pawtuckaway Lake TMDL analysis is as follows:

$$\text{TMDL} = \text{LA} + \text{WLA} + \text{MOS}$$

In the case of Pawtuckaway Lake, the TMDL is equivalent to the target annual load of 612.4 kg/yr. Allocations of this load are described below.

### 5.1 Wasteload Allocations (WLAs) and Load Allocations (LAs)

Wasteload allocations identify the portion of the loading capacity that is allocated to point sources and load allocations identify the portion of the loading capacity that is allocated to nonpoint sources and natural background. Point sources in this watershed include stormwater outfalls and stormwater runoff from present or future construction activities. Nonpoint sources may include diffuse stormwater runoff, surface water base flow (including groundwater seepage), septic systems, internal recycling, waterfowl, and atmospheric deposition. The real challenge in splitting out point sources from nonpoint sources resides with the available data. In order to accurately develop allocations for these two categories of sources it is essential to have not only a complete accounting of each point source, but also a delineation of the associated drainage area and an estimate of existing pollutant loading. Generating this loading estimate is further compounded by the fact that stormwater discharges are highly variable in frequency, duration, and quality. Because sufficient information at the parcel level was simply not available in this watershed, it is infeasible to draw a distinction between stormwater from existing or future regulated point sources, non-regulated point sources, and nonpoint sources. Therefore, a single wasteload allocation (WLA) has been set for the entire watershed, which includes both point and nonpoint sources (Table 6-1). This allocation is also expressed as a percent reduction (Table 6-1). This is the reduction needed from all controllable sources in order to ensure that designated uses are fully supported in this waterbody.

### 5.2 Margin of Safety (MOS)

An MOS in this TMDL accounts for substantial uncertainty in inputs to the models. In addition, the empirical equations used to predict in-lake TP concentrations, mean and maximum chl *a*, SDT, and algal bloom probability also introduces variability into the predictions described in Section 3.5. See Appendix A for a discussion of the MOS for each of the three approaches used to set the target.

## 6.0 Evaluation of Alternative Loading Scenarios

The ENSR-LRM model was used to evaluate a number of alternative loading scenarios and the probable lake response to these loadings. These scenarios included:

- Current Loading,
- Natural Environmental Background Loading,
- Removal of Septic Load,
- Removal of Internal Load, and
- Reduction of Watershed Loads to Meet 12 µg/L Target.

The current loading scenario is discussed above in Section 3.0. Each scenario described below represents a change from the current loading scenario. The discussion of each scenario includes only the portions of the current loading scenario that were altered for the specific simulation. A comparison of the results of each of the alternative scenarios is presented in Tables 6-1 and 6-2. More detailed model output can be found in Tables C-9 to C-12 in Appendix C.

Table 6-1. Comparison of Phosphorus Loading Scenarios for Pawtuckaway Lake.

Inputs	Current Load (kg/yr)	Natural Environmental Background (kg/yr)	Current Load without Septic Load (kg/yr)	Current Load without Internal Load (kg/yr)	Target Load to Obtain 12 ug/L In-lake Concentration (kg/yr)
Atmospheric	79.3	79.3	79.3	79.3	79.3
Internal	34.1	0.0	34.1	0.0	34.1
Waterfowl	7.6	3.8	7.6	7.6	3.8
Septic System	94.3	0.0	0.0	94.3	70.7
Watershed Load- Back Creek B	246.9	148.2	246.9	246.9	153.4
Watershed Load- Back Creek A	6.1	6.1	6.1	6.1	6.1
Watershed Load- Round Pond	89.1	84.7	89.1	89.1	84.7
Watershed Load- Loon Cove A	13.3	13.0	13.3	13.3	13.0
Watershed Load- Mt. Brook	83.7	73.7	83.7	83.7	73.7
Watershed Load- Fernalds Brook A	10.4	6.9	10.4	10.4	6.9
Watershed Load- Fundy Bk	3.5	3.2	3.5	3.5	3.2
Watershed Load- Burnhams-N	4.2	4.2	4.2	4.2	4.2
Watershed Load- Burnhams-S	14.2	8.5	14.2	14.2	8.9
Watershed Load- Loon Cove B	1.3	1.1	1.3	1.3	1.1
Watershed Load- White Grove	3.7	2.5	3.7	3.7	2.5
Watershed Load- Fernalds Brook B	2.6	1.9	2.6	2.6	1.9
Watershed Load- Grove Dam	5.2	3.8	5.2	5.2	3.8
Watershed Load- Direct Drainage	98.6	41.8	98.6	98.6	61.1
<b>Total Load</b>	797.8	482.7	703.5	763.7	612.4
<b>Total Overall Load Reduction</b>	0.0	315.1	94.3	34.1	185.4
<b>Percent Overall Reduction</b>	0%	39%	12%	4%	23%
<b>Total Watershed Load</b>	582.6	399.6	582.6	582.6	424.5
<b>Total Watershed Reduction</b>	0	182.9	0.0	0.0	158.0
<b>Percent Watershed Reduction</b>	0%	31%	0%	0%	0-38%*

\*See Table 4-1 for target reductions for each subwatershed.



**Table 6-2. Lake Water Quality Response to Different Loading Scenarios for Pawtuckaway Lake.**

<b>Parameters</b>	<b>Current Load</b>	<b>Natural Environmental Background</b>	<b>Current Load without Septic Load</b>	<b>Current Load without Internal Load</b>	<b>Target Load to Obtain 12 <math>\mu\text{g/L}</math> In-lake Concentration</b>
TP Load (kg/yr)	797.8	482.7	703.5	763.7	612.4
Mean Annual TP ( $\mu\text{g/L}$ )	15.6	9.4	13.8	14.9	12
Mean Secchi Disk Transparency (m)	2.8	4.1	3.1	2.9	3.4
Mean Chlorophyll <i>a</i> ( $\mu\text{g/L}$ )	5.4	2.7	4.6	5.1	3.8
Peak Chlorophyll <i>a</i> ( $\mu\text{g/L}$ )	19	10.2	16.3	18	13.7
Probability of Summer Bloom (Chl <i>a</i> > 15 $\mu\text{g/L}$ )	1.1%	0.0%	0.4%	0.8%	0.1%

## 6.1 Natural Environmental Background Phosphorus Loading

Natural environmental background levels of TP in the lake were evaluated using the ENSR-LRM model. Natural background was defined as background TP loading from non-anthropogenic sources. Hence, land uses in the watershed were set to its assumed “natural” state of forests and wetlands. Loading was then calculated using the ENSR-LRM model as described above. This estimate is useful as it sets a realistic lower bound of TP loading and in-lake concentrations possible for Pawtuckaway Lake. Loadings and target concentrations below these levels are very unlikely to be achieved.

The internal TP load, and septic loads were removed and all developed land was converted to forests. The developed land was split into mixed, deciduous, and coniferous forest categories in the same percentages as the current watershed forest composition. Wetland areas were not changed because it was assumed no wetland had been lost due to development. Background TP loads under this scenario were 482.7 kg/yr total and watershed loads of 399.6 kg/yr. Table 6-1 compares loads for possible scenarios. The calculated background loading of TP to Pawtuckaway Lake would result in mean in-lake TP concentration of 9.4 µg/L, a mean Secchi Disk transparency of 4.1 m, and a bloom probability of chl *a* > 15 µg/L of 0%. Estimated TP loading to the lake under this scenario is 39% lower than current loads to the lake. The lake would support designated uses under this scenario as the in-lake predicted TP concentration (9 µg/L) is well below the target value (12 µg/L).

## 6.2 Septic System Load Removal

This scenario involved removal of the septic loads only. It is a reasonable approximation of what would occur if the lake were sewered or all existing septic systems exported TP at a negligible concentration. Under this scenario, total loading is only decreased by 12% over current loading and would likely not support designated uses. Removal of all septic sources would likely be costly and not substantially impact the lake. However, our analysis did not account for actively failing septic systems. Such systems may have localized impacts on TP and should be addressed as they are discovered.

## 6.3 Internal Load Removal

Pawtuckaway Lake currently experiences low hypolimnetic DO during the summer. These conditions allow TP release from the sediments to the hypolimnion, elevating TP concentrations in the water column. Mixing events move this TP up in the water column where it is available for algal growth. Under this scenario, internal loading is removed as a source of TP. Total loading is reduced by 4% under this scenario. Just addressing internal loading would not be sufficient for Pawtuckaway Lake to support its designated uses.

## 6.4 Reduction of Watershed Loads to Meet In-lake Target of 12 µg/L

This scenario involves the focus of resources on the largest sources of TP to Pawtuckaway Lake, the watershed loads. Under this scenario, watershed TP loads were iteratively reduced until predicted in-lake concentrations met the 12 µg/L target. A reduction of 0 to 38% of the loads from all of the subwatersheds, a 25% reduction in septic system loading, and a 50% reduction in waterfowl loading would be required to meet the annual load of 612.4 kg/yr related to the TMDL. A reduction of 0-38% should be technologically achievable as it is less than the maximum estimated achievable reduction of approximately 60-70% (Center for Watershed Protection, 2000). Although a reduction in internal loading may eventually occur as a result of a watershed load reduction, the timing and extent of this potential reduction is unknown. If watershed load reduction resulted in elimination of the internal loading to Pawtuckaway Lake, in-lake concentration might be further reduced. This scenario represents the allocation that will be most realistic to implement and improve Pawtuckaway Lake to the point where it will support its designated uses. Loads associated with this scenario are presented in Table 6-1 and predicted in-lake concentrations and bloom probabilities are presented in Table 6-2. Conceptual implementation guidance for watershed control is provided in Section 7.0. This load reduction scenario is expected to result in Pawtuckaway Lake supporting the use of primary contact recreation based on meeting criteria for cyanobacteria and DO saturation.

## 7.0 Implementation Plan

The following TP control implementation plan provides recommendations for future BMP work and necessary water quality improvements. The recommendations are intended to provide options of potential watershed and lake management strategies that can improve water quality to meet target loads. Note that providing a comprehensive diagnostic/feasibility study is beyond the scope of this report, but we have attempted to narrow the range of management options in accordance with known loading issues and desired loading reductions.

The successful implementation of this TMDL will be based on compliance with water quality criteria for DO and cyanobacteria scums, and not on meeting the TP reduction target (23)%. It is anticipated that TP reductions associated with this TMDL will be conducted in phases.

As discussed in Section 3.0, watershed TP loading is the predominant source (73%) of TP to Pawtuckaway Lake. Septic systems, waterfowl loading, and internal TP recycling also contribute to the total load. Although waterfowl loading contribute only 1% of the entire TP load, the waterfowl population is elevated due to human influence (i.e. feeding), so a 50% reduction is recommended. The septic load contributes 12% of the entire TP load. It is recommended that septic load is reduced 25% as many of the shoreline homes are on soils with septic limitations. Implementing BMPs to reduce the watershed load is the most effective strategy to reduce the TP loading into Pawtuckaway Lake in order to attain an in-lake TP concentration of 12 µg/L. Reduction of the watershed load may ultimately reduce the internal load, but as the internal load is small, this does not provide a large additional reduction.

Experience suggests that aggressive implementation of watershed BMPs may result in a maximum practical TP loading reduction of 60-70%. Greater reductions are possible, but consideration of costs, space requirements, and legal ramifications (e.g., land acquisitions, jurisdictional issues), limit attainment of such reductions. Most techniques applied in a practical manner do not yield >60% reductions in TP loads (Center of Watershed Protection, 2000). Better results may be possible with widespread application of low impact development techniques, as these reduce post-development volume of runoff as well as improve its quality, but there is not enough of a track record yet to generalize attainable results on a watershed basis.

The actual reduction in watershed loading necessary to meet the 12 µg/L limit is 0-38% (Section 6.4), and it is assumed that this reduction would be obtained mainly from the runoff portion of the load. This level of reduction is within the practical maximum suggested by Center of Watershed Protection (2000). Implementation would be phased in over a period of several years, with monitoring and adjustment as necessary.

There are a number of BMPs that could appropriately be implemented in the Pawtuckaway Lake watershed (Table 7-1). BMPs fall into three main functional groups: 1) Recharge / Infiltration Practices, 2) Low Impact Development Practices, and 3) Extended Detention Practices. The table lists the practices, the pollutants typically removed and the degree of effectiveness for each type of BMP. Specific information on the BMPs is well summarized by the Center for Watershed Protection (2000).

The 2008 Pawtuckaway Lake Watershed Based Plan proposes some watershed management techniques to reduce watershed loading (Geosyntec 2008). This watershed based plan provides elements required by Section 319 grants.

Section 319 of the Clean Water Act was established to assist states in nonpoint source control efforts. Under Section 319, grant money can be used for technical assistance, financial assistance, education training, technology transfer, demonstration projects and monitoring to assess the success of specific nonpoint source implementation projects.

US EPA has identified a minimum of nine elements that must be included in a management plan for achieving improvements in water quality. A summary of the nine elements is provided below. The full description can be found in US EPA (2005).

- 1) Identification of causes of impairment and pollutant sources.
- 2) An estimate of the load reductions expected from management measures.
- 3) A description of the nonpoint source measures needed to achieve load reductions.
- 4) An estimate of the technical and financial assistance needed and the cost.
- 5) An information and education component.
- 6) A schedule for implementation.
- 7) Description of milestones to determine if goals are being met.
- 8) Criteria to determine progress in reducing loads.
- 9) Monitoring to evaluate effectiveness of implementation efforts over time.

This TMDL was written to meet the criteria of the first element. Application materials and instructions for 319 funding can be obtained through:

Nonpoint Coordinator  
New Hampshire Department of Environmental Services  
29 Hazen Drive  
P.O. Box 95  
Concord, NH 03302  
[www.des.state.nh.us/wmb/was/grants.htm](http://www.des.state.nh.us/wmb/was/grants.htm)

Proactive planning can prevent the further degradation of lake water quality. However, past resistance to zoning regulations creates difficulties for proactive planning. The TMDL process is intended to give a direction and goal for planning and watershed management. As the lake improves, the implementation strategy should be re-evaluated using current data and modeling and the plan for further load reduction adapted accordingly.

Table 7-1. Best Management Practices Selection Matrix.

Management Practice	Management Practice													Availability				
	1. Nutrient Volume (N)	2. Phosphorus Load (P)	3. Sediment Load (S)	4. Runoff (R)	5. Peak Flow (PF)	6. Storm Water (SW)	7. In-Stream (IS)	8. Riparian (RI)	9. Edge-of-Water (EW)	10. Hydroponic (H)	11. Agricultural (A)	12. Residential (RES)	13. Commercial (COM)	14. Available	15. Feasible	16. Cost Effective	17. Sustainable	
Recharge of Open Ponds	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	
Low Impact Development Practices	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	
Extended Retention Practices	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	
Other Best Management Practices	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	Well Suited	

**Key**

- Adverse Impact
- Moderate Mitigation
- Good Mitigation
- Minimal Mitigation
- Moderately Suited
- Well Suited
- Not Applicable

## 8.0 Monitoring Plan

New Hampshire Department of Environmental Services (NH DES) conducted Lake Trophic Studies in the summers of 1979, 1989, and 1998. The Volunteer Lake Assessment Program (VLAP) began monitoring Lake Pawtuckaway in 1988 and continues to the present day (NH DES, 2006b). DES also conducted a diagnostic/feasibility study in 1995. The two deepest sites, one in the northern basin and the other in the southern basin are the primary sampling locations in Pawtuckaway Lake (Figure 8-1). Water quality samples collected during summer stratification are tested for epilimnetic and hypolimnetic TP. In addition, a composite sample of the water column to the depth of the thermocline is tested for chl *a*. A DO profile from top to bottom is conducted and a Secchi disk transparency measurement is taken.

It is recommended that VLAP sampling be continued to document the in-lake response, trends, and compliance with water quality criteria following implementation of TP reduction measures. As discussed in the previous section, successful implementation of this TMDL will be based on compliance with water quality criteria for DO and cyanobacteria scums. Data collected by VLAP includes DO, planktonic chl *a* and the reporting of cyanobacteria scums. NH DES staff will continue to sample and document the extent and severity of reported cyanobacteria scums through microscopic identification, cell counts and toxicity tests.

To help prioritize implementation of TP reduction measures in the subwatersheds, it is suggested that stakeholders collect wet as well as dry weather TP samples (along with estimates of flow) in the tributaries to update the data collected in the 1995 NH DES Diagnostic/Feasibility study. The TP loads should be calculated using concentration and flow data. Tributaries impacted by humans (i.e., not natural) with the highest TP load should be the target of initial efforts to reduce TP.

Although septic systems are not believed to be a major source of TP loading, an updated survey of septic systems would help confirm model input, including the assumption that there are no failed septic systems.

Implementation of the monitoring plan is contingent on the availability of sufficient staff and funding.



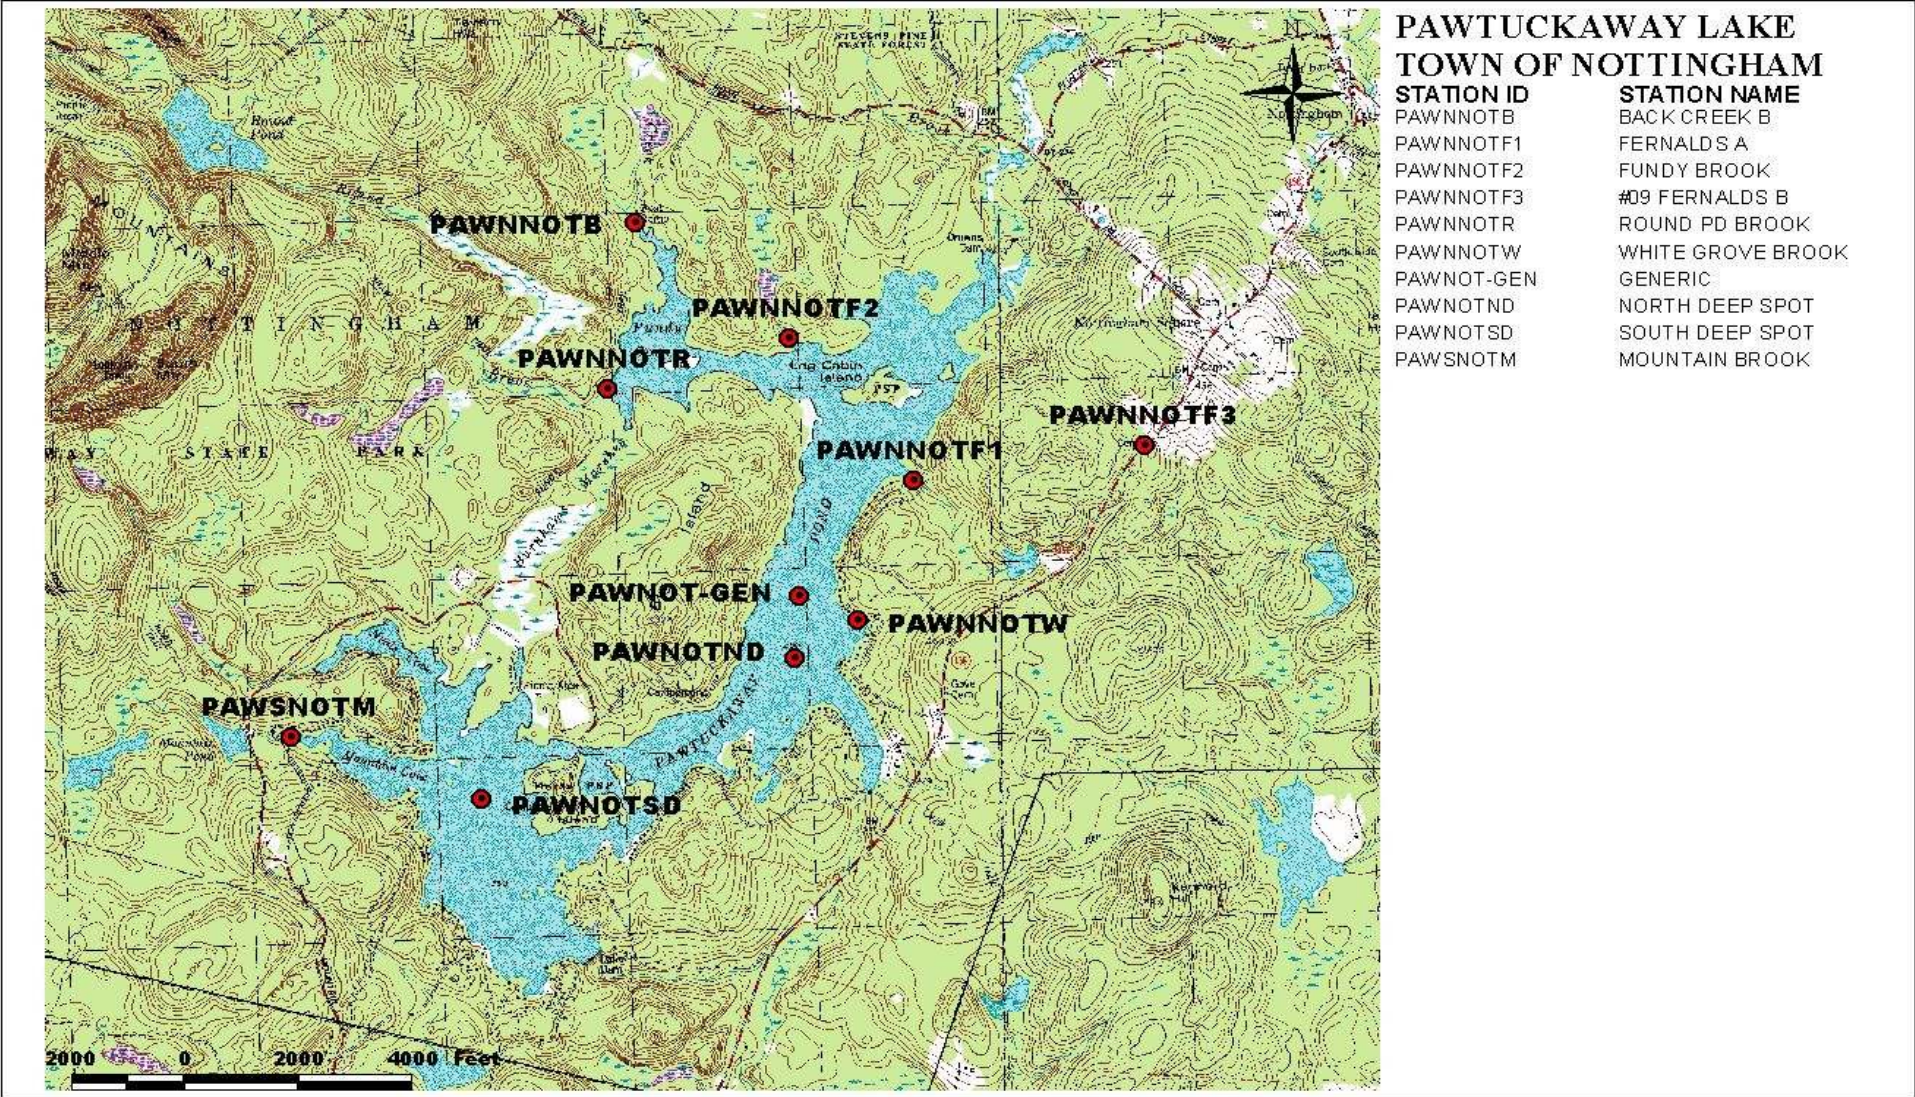


Figure 8-1. NH DES Sampling Locations in Pawtuckaway Lake.



## 9.0 Reasonable Assurances

The TMDL provides reasonable assurances that nonpoint source reductions will occur by providing information on the cooperative efforts of the NH DES and watershed stakeholders to initiate the process of addressing nonpoint source pollution in the watershed. The successful reduction in nonpoint TP loading, however, depends on the willingness and motivation of stakeholders to get involved and the availability of federal, state, and local funds.

As discussed in section 5.1, sufficient data are simply not available in this watershed to draw an accurate distinction between nonpoint watershed sources and point sources of phosphorus. Given the difficulty in accurately separating these sources, the allocations in this TMDL are characterized as a single wasteload allocation (WLA) which includes both point and nonpoint sources. The State fully acknowledges that it will take a concerted effort to reduce phosphorus loading to the maximum extent practicable from as many sources as possible in order to fully support designated uses in this waterbody. In many cases, phosphorus reductions from individual sources can and should be greater than the prescribed reductions in this TMDL, in order to make up for areas of the watershed where greater reductions are not attainable.

Reasonable assurance that non-regulated point source and nonpoint source load reductions will occur include the following:

-RSA 485-A:12, which requires persons responsible for sources of pollution that lower the quality of waters below the minimum requirements of the classification to abate such pollution, will be enforced.

-NHDES will work with watershed stakeholders to identify specific phosphorus sources within the watershed. Technical assistance is available to mitigate phosphorus export from existing nonpoint sources.

Requests for 319 funding to implement specific BMPs within the watershed shall receive high priority. The new NHDES Stormwater Manual provides information on site design techniques to minimize the impact of development on water quality as well as BMPs for erosion and sediment control and treatment of post-construction stormwater pollutants. Also of use to municipalities is the Innovative Land Use Planning Techniques Handbook, which provides model municipal ordinances including one on post-construction stormwater management. Both documents are accessible on the NHDES website at [www.des.nh.gov](http://www.des.nh.gov). DES staff also provides assistance by working with Lake Associations to identify LID projects that would qualify for 319 funding.

-Per RSA 483-A:7 Lakes Management and Protection Plans, the lakes coordinator and the Office of Energy and Planning, in cooperation with regional planning agencies, and appropriate council on resources and development agencies, shall provide technical assistance and information in support of lake management and local shoreland planning efforts consistent with the guidelines established under RSA 483-A:7, and compatible with the criteria established under RSA 483-A:5.

-For lakes included in the NHDES Volunteer Lake Assessment Program, NHDES staff will meet with participants on an annual basis during field sampling visits and annual workshops to discuss TP reduction opportunities and assist them with securing 319 grants where eligible.



## 10.0 Public Participation

US EPA regulations (40 CFR 130.7 (c) (ii)) require that calculations to establish TMDLs be subject to public review.

On March 15, 2010, a public notice (see Figure 9-1) announcing the availability of the draft TMDL for public review and comment was posted on the DES website ([www.des.state.nh.us/wmb/TMDL/](http://www.des.state.nh.us/wmb/TMDL/)). On this date, three copies of the draft report and two copies of the public notice were also mailed to the Nottingham Town Administrator office for distribution. One copy of the draft report was kept at Town Hall and the public notices were posted on the public bulletin boards at Town Hall. In addition, copies of the draft report and the public notice were mailed to the Pawtuckaway Volunteer Lake Association. Written public comments were accepted from March 15<sup>th</sup>, 2010 through April 23<sup>rd</sup> 2010 (a period of 49 business days). NHDES did not receive any written comments on the Draft Report, therefore no substantive changes were made to the report.

**Figure 9-1. Public Notice**

Date: March 15, 2010

Subject: **PUBLIC NOTICE - Draft Pawtuckaway Lake Nutrient TMDL Report Available for Public Comment**

### **PUBLIC COMMENTS ACCEPTED UNTIL 4 PM ON April 23, 2010**

Dear Interested Party or Stakeholder:

The "Draft Total Maximum Daily Load (TMDL) Study for Nutrients in Pawtuckaway Lake is now available for public review and comment on the New Hampshire Department of Environmental Services website at:

<http://des.nh.gov/organization/divisions/water/wmb/tmdl/categories/publications.htm>

A copy of the report is also available for review at the Nottingham Town Hall.

The New Hampshire Department of Environmental Services (DES), in conjunction with the U.S. Environmental Protection Agency (EPA) and the environmental consulting firm AECOM, conducted a Total Maximum Daily Load (TMDL) study for total phosphorus for Pawtuckaway Lake in Nottingham. Pawtuckaway Lake is on the 2008 list of impaired waters [i.e. the section 303(d) list] because of elevated algal growth which impaired the primary contact recreation (swimming) use. Phosphorus is the nutrient responsible for algal growth in most freshwater lakes, ponds and rivers.

The TMDL conducted at Pawtuckaway Lake identified an in-lake target phosphorus value that, when met, should result in attainment of New Hampshire water quality standards. A phosphorus budget was constructed, phosphorus sources identified and phosphorus reductions allocated to each of the sources to meet the target value. An implementation plan provides recommendations on watershed remediation activities to reduce phosphorus inputs to the waterbodies.

Comments will be accepted until 4 pm on April 23, 2010. Only written comments will be accepted. All comments must include the name of the TMDL, the date and contact information (your name, address, phone, e-mail, and organization).

Comments can be mailed to:

TMDL Program  
 NHDES Watershed Management Bureau  
 29 Hazen Drive, P.O. Box 95  
 Concord, NH 03301  
 Attention Margaret P. Foss, TMDL Coordinator

or sent by email to [TMDL@des.state.nh.us](mailto:TMDL@des.state.nh.us).

For convenience, a cover sheet for submitting written public comments is available at the website address posted above.

If you have any questions about the report, please contact Margaret Foss, NHDES TMDL Coordinator at (603) 271-5448 or via email at [mfoss@des.state.nh.us](mailto:mfoss@des.state.nh.us).

## 11.0 References

- Brown and Associates. 1980. An assessment of the impact of septic leach fields, home lawn fertilization and agricultural activities on groundwater quality. Prepared for NJ Pinelands Commission. K.W. Brown and Associates, College Station, TX.
- Carlson, R. 1977. A Trophic State Index for Lakes. *Limnol. and Oceanogr.* 22:261-369 Mifflin Co., NY.
- Center for Watershed Protection. 2000. National Pollutant Removal Performance Database, 2<sup>nd</sup> Edition. CWP, Ellicott City, MD.
- Connecticut Department of Environmental Protection and ENSR. 2004. A Total Maximum Daily Load Analysis for Kenosia Lake in Danbury, Connecticut. Accessed March 20, 2007. <[http://www.ct.gov/dep/lib/dep/water/tmdl/tmdl\\_final/kenosialaketmdl.pdf](http://www.ct.gov/dep/lib/dep/water/tmdl/tmdl_final/kenosialaketmdl.pdf)>
- Connor, J. and S. Landry. 1995. Pawtuckaway Lake Diagnostic/Feasibility Study. NH Department of Environmental Services.
- Craycraft, R. and J. Schloss. 2005. Baboosic Lake Water Quality Monitoring: 2005, Center for Freshwater Biology, University of New Hampshire.
- Dennis, J., J. Noel, D. Miller, C. Elliot, M.E. Dennis, and C. Kuhns. 1992. Phosphorus Control in Lake Watersheds: A Technical Guide to Evaluating New Development. Maine Department of Environmental Protection, Augusta, Maine.
- Dillon, P.J. and F.H. Rigler. 1974. The Phosphorus-Chlorophyll Relationship in Lakes. *Limnol. Oceanogr.* 19:767-773.
- Dudley, J.G. and D.A. Stephenson. 1973. Nutrient Enrichment of Ground Water from Septic Tank Disposal Systems. Upper Great Lakes Regional Commission.
- Dudley, R.W., S.A. Olson, and M. Handley. 1997. A preliminary study of runoff of selected contaminants from rural Maine highways. U.S. Geological Survey, Water-Resources Investigations Report 97-4041 (DOT, DEP, WRI), 18 pages.
- Duffy, T. 2008. Telephone Interview. Co-President of Pawtuckaway Lake Improvement Association.
- Dunn, T. and L.B. Leopold. 1978. Water in Environmental Planning. W.H. Freeman and Company, San Francisco, CA
- Economic and Labor Market Information Bureau. 2007. New Hampshire Employment Security. Accessed 11 November 2007. <http://www.nh.gov/nhes/elmi/communpro.htm>.
- ENSR. 2007. New Hampshire Lakes Total Maximum Daily Load (TMDL) Project Data Collection from Outside Sources. Prepared for US EPA Region 1.
- Geosyntec. 2008. Pawtuckaway Lake Watershed Based Plan.

- Higgins, G.R. and J.M. Colonell. 1970. Hydrologic Factors in the Determination of Watershed Yields. Publication #20. WRRRC, UMASS, Amherst, MA.
- Jones, J. and R. Bachmann. 1976. Prediction of Phosphorus and Chlorophyll Levels in Lakes. JWPCF 48:2176-2184.
- Jones, R.A., W. Rast and G.F. Lee. 1979. Relationship between summer mean and summer maximum chlorophyll *a* concentrations in lakes. Env. Sci. & Technol. 13:869-870.
- Kirchner, W. and P. Dillon. 1975. An Empirical Method of Estimating the Retention of Phosphorus in Lakes. Water Resource. Res. 11:182-183.
- Larsen, D. and H. Mercier. 1976. Phosphorus Retention Capacity of Lakes. J. Fish. Res. Bd. Can. 33:1742-1750.
- Maine Department of Environmental Protection. 2003. Three-cornered Pond PCAP-TMDL. Maine DEP LW 2002-0562.
- Metcalf & Eddy, Inc. 1991. 3rd ed. Wastewater Engineering Treatment, Disposal and Reuse. Tchobanoglous, G. and F.L. Burton. McGraw-Hill, Inc.: New York.
- Mitchell, D.F., K.J. Wagner, W.J. Monagle, and G.A. Beluzo. 1989. A Littoral Interstitial Porewater (LIP) Sampler and Its Use in Studying Groundwater Quality Entering a Lake. Lake and Reservoir Management. 5(1):121-128.
- New Hampshire Department of Environmental Services. New Hampshire Code of Administrative Rules, Chapter Env-Ws 1700 Surface Water Quality Regulations. Accessed March 20, 2007 from <http://www.des.state.nh.us/rules/env-ws1700.pdf>.
- New Hampshire Department of Environmental Services. 2005. Analysis of NH DES Data to Determine Preliminary Total Phosphorus Criteria for Freshwaters. Interoffice memorandum from Phil Trowbridge to Greg Comstock. August 5, 2005.
- New Hampshire Department of Environmental Services. 2006a. 2006 303(d) Surface Water Quality List.
- New Hampshire Department of Environmental Services. 2006b. NH Volunteer Lake Monitoring Program Reports. < <http://www.des.state.nh.us/wmb/vlap/2006/index.html>>.
- New Hampshire Department of Environmental Services. 2007. GIS data: Bathymetry, Water Use, EMD Stations, and Watersheds.
- New Hampshire Department of Environmental Services. 2008a. 2008 Section 305(b) and 303(d) Surface Water Quality Report. Consolidated Assessment and Listing Methodology and Comprehensive Monitoring Strategy. Document NH DES-R-WD-02-11. September, 2008.
- New Hampshire Department of Environmental Services. 2008b. 2008 303(d) Surface Water Quality List.
- New Hampshire Fish and Game. 2007. *New Hampshire Freshwater Fishing Guide. An Angler's Guide to the Granite State's Best Freshwater Lakes, Ponds, Rivers and Streams.* New Hampshire Fish and Game Public Affairs Division. Concord, NH. Accessed November 11, 2007. <[http://www.wildlife.state.nh.us/Fishing/fishing\\_forecast/Locations\\_Southeast.htm](http://www.wildlife.state.nh.us/Fishing/fishing_forecast/Locations_Southeast.htm)>.
- New Hampshire GRANIT. 2007. Complex Systems Research Center. Accessed March 11, 2007. <<http://www.granit.unh.edu/#>>.

- Nurnberg, G.K. 1996. Trophic State of Clear and Colored, Soft and Hardwater lakes with Special Consideration of Nutrients, Anoxia, Phytoplankton and Fish. *Journal of Lake and Reservoir Management* 12(4):432-447.
- Nurnberg, G.K. 1998. Prediction of annual and seasonal phosphorus concentrations in stratified and unstratified polymictic lakes. *Limnology and Oceanography*, 43(7), 1544-1552.
- Oglesby, R.T. and W.R. Schaffner. 1978. Phosphorus Loadings to Lakes and some of their responses. Part 2. Regression Models of Summer Phytoplankton Standing Crops, Winter Total P, and Transparency of New York Lakes with Phosphorus Loadings. *Limnol. Oceanogr.* 23:135-145.
- Reckhow, K. 1977. Phosphorus Models for Lake Management. Ph.D. Dissertation, Harvard University, Cambridge, MA.
- Reckhow, K.H., M.N. Beaulac, and J.T. Simpson. 1980. Modeling phosphorus loading and lake response under uncertainty: a manual and compilation of export coefficients. EPA 440/5-80-011, US-EPA, Washington, D.C.
- Schloss, J.A. and J. Connor. 2000. Development of Statewide Nutrient Loading Coefficients through Geographic Information System Aided Analysis. University of New Hampshire, Water Resources Research Center, project summary.
- Schloss, J.A. 2008. unpublished LLMP data for Goose Pond and Bow Lake.
- Sopper, W.E. and H.W. Lull. 1970. Streamflow Characteristics of the Northeastern United States. Bulletin 766. Penn State Agricultural Experiment Station, University Park, PA
- United States Environmental Protection Agency. 1998. *National Strategy for the Development of Regional Nutrient Criteria. Fact Sheet*. Office of Water. Washington, D.C. Document EPA 822-F-98-002.
- United States Environmental Protection Agency. 1999. "Protocol for Developing Nutrient TMDL's", EPA-841-B-99-077, EPA, Washington, DC. <<http://www.epa.gov/owow/tmdl/nutrient/pdf/nutrient.pdf>>.
- United States Environmental Protection Agency. 2000a. *Nutrient Criteria Technical Guidance Manual. Lakes and Reservoirs*. Office of Water. Washington, D.C. Document EPA 822-B-00-004.
- United States Environmental Protection Agency. 2000b. *Ambient Water Quality Criteria Recommendations. Rivers and Streams in Ecoregion XIV*. Office of Water. Washington, D.C. Document EPA 822-B-00-022.
- United States Environmental Protection Agency. 2000c. *Ambient Water Quality Criteria Recommendations. Rivers and Streams in Ecoregion VII*. Office of Water. Washington, D.C. Document EPA 822-B-00-018.
- United States Environmental Protection Agency. 2005. Handbook for Developing Watershed Plans to Restore and Protect Our Waters. Document EPA 841-B-05-005.
- U.S. Environmental Protection Agency. 2006. Establishing TMDL "Daily" Loads in Light of the Decision by the U.S. Court of Appeals for the D.C. Circuit in Friends of the Earth, Inc. v. EPA, et al., No. 05-5015, (April 25, 2006) and Implications, for NPDES Permits.

- U.S. Environmental Protection Agency. 2007. Options for Expressing Daily Loads in TMDLs. Draft 6/22/08. U.S. Environmental Protection Agency, Office of Wetlands, Oceans and Watersheds.
- University of New Hampshire Cooperative Extension. 2007. Landscaping at the Waters Edge: An Ecological Approach.
- Vollenweider, R.A. 1975. Input-output models with special references to the phosphorus loading concept in limnology. Schweiz. Z. Hydrol. 37:53-62.
- Vollenweider, R. 1982. Eutrophication of Waters: Monitoring, Assessment and Control. OECD, Paris.
- Walker. W.W. 1984. Statistical bases for mean chlorophyll a criteria. Pages 57-62 in Lake and Reservoir Management – Practical Applications. Proceedings of the 4<sup>th</sup> annual NALMS symposium. US EPA, Washington, DC
- Walker. W.W. 2000. Quantifying uncertainty in phosphorus TMDLs for lakes. Prepared for NEIWPC and US EPA Region I. Concord, MA.
- Wetzel, R. G. 2001. Limnology: Lake and River Ecosystems. Academic Press: Boston.

## **Appendix A:**

### **Methodology for Determining Target Criteria**



## 1.0 Derivation of Total Phosphorus (TP) Target Values

As part of its contract with the US EPA, Region 1, AECOM is assisting the NH DES in developing Total Maximum Daily Loads (TMDLs) for 30 nutrient-impaired waterbodies in New Hampshire, under *Task 1, Development of Lake Phosphorus TMDLs*. To develop TMDLs for these waterbodies it is necessary to derive numeric total phosphorus (TP) target values (e.g., in-lake concentrations) for determining acceptable watershed nutrient loads. The background, approach, and TP target values are provided below.

### 1.1 Regulatory Background

As part of the national Nutrient Strategy originally set forth by the “Clean Water Action Plan” (US EPA, 1998), US EPA has directed the States to promulgate nutrient criteria or alternative means to address and reduce the effects of elevated nutrients (eutrophication) in lakes and ponds, reservoirs, rivers and streams, and wetlands. Where available, these nutrient criteria can be useful in developing TMDLs as well as in demonstrating potential compliance due to the implementation strategy selected to reduce impairment.

At this time, New Hampshire has not established a numeric water quality standard (or nutrient criterion) for TP to protect the designated water uses. Rather, New Hampshire has established a series of use-specific assessment criteria that are used to identify and list waters for impairment of designated uses under the unified Clean Water Act (CWA) Section 305(b) and Section 303(d) Consolidated Assessment and Listing Methodology (CALM) (NH DES, 2008a). Thus, while the 30 lakes considered by this investigation are considered likely to be impacted by excessive nutrients, the specific listed impairments are for the phytoplankton primary photopigment chl *a* and the presence of cyanobacteria (indicator for primary contact recreation) and/or dissolved oxygen (DO) (indicator for aquatic life support) (NH DES, 2006a, 2008b).

#### 1.1.1 New Hampshire Water Use Assessment Criteria

The following assessment criteria have been established for evaluation compliance with water use support and for reporting and identifying waterbodies for listing on the unified CWA Section 305(b)/303(d) list in New Hampshire:

##### 1.1.1.1 Chlorophyll *a*

Assessment for the trophic indicator photopigment chl *a* is evaluated through comparison of samples generally collected during the summer index period (defined as May 24 – September 15) to the freshwater chl *a* interim criterion of 15 ppb (0.015 mg/L) (NH DES, 2008a). If the criterion is exceeded then the waterbody is considered non-supporting for the primary contact recreation water use.

##### 1.1.1.2 Dissolved Oxygen

Applicable water quality standards for DO include the following:

Env-Wq 1703.07 (b): Except as naturally occurs, or in waters identified in RSA 485-A:8, III, or subject to (c) below, class B waters shall have a DO content of at least 75% of saturation, based on a daily mean, and an instantaneous minimum DO concentration of at least 5 mg/L.

Env-Wq 1703.07 (d): Unless naturally occurring or subject to (a) above, surface waters within the top 25 percent of depth of thermally unstratified lakes, ponds, impoundments and reservoirs or within the epilimnion shall contain a DO content of at least 75 percent saturation, based on a daily mean and an instantaneous minimum DO content of at least 5 mg/L. Unless naturally occurring, the DO content below those depths shall be consistent with that necessary to maintain and protect existing and designated uses.

### 1.1.1.3 Cyanobacteria

A lake is listed as not supporting primary contact recreation if cyanobacteria scums are present. Reduction of TP loading will reduce the likelihood of scum formation.

### 1.1.2 Linkage of Assessment Criteria to TP TMDLs

The *chl a*, cyanobacteria and DO assessment criteria described above provide NH DES with a consistent and efficient means to identify and list impaired waters for purposes of 305(b)/303(d). However, these parameters are not amenable to development of a TMDL for correction of these impairments for several reasons including:

- these are merely secondary indicators of eutrophication but not the primary cause (i.e., excessive nutrients);
- measurement of these parameters is complicated by physical (e.g., light availability) and temporal considerations (e.g., pre-dawn measurements);
- it is not feasible to establish watershed load allocations for *chl a* or DO;
- there are limited control technologies or best management practices (BMPs) for these parameters; and/or
- it is much more technically and economically feasible to address the primary cause (i.e., excessive nutrients) as a means to reduce or eliminate impairments.

While AECOM uses the term “excessive nutrients” as the primary cause, it is generally understood, and for purposes of this TMDL development assumed that, TP is the limiting nutrient for plant growth in these waters. Therefore, it is necessary to derive numeric TP target values that are both protective of the water uses and correlate to lake conditions under which the *chl a*, the presence of cyanobacteria scums and DO assessment criteria are met. TP is used as a surrogate for impairments related to *chl a*, cyanobacteria scums and DO.

## 1.2 Proposed TP TMDL Target Values

According to the 40 CFR Part 130.2, the TMDL for a waterbody is equal to the sum of the individual loads from point sources (i.e., wasteload allocations or WLAs), and load allocations (LAs) from nonpoint sources (including natural background conditions). Section 303(d) of the CWA also states that the TMDL must be established at a level necessary to implement the applicable water quality standards with seasonal variations and a margin of safety (MOS) which takes into account any lack of knowledge concerning the relationship between effluent limitations and water quality. In equation form, a TMDL may be expressed as follows:

$$\text{TMDL} = \text{WLA} + \text{LA} + \text{MOS}$$

Where:

WLA = Waste Load Allocation (i.e., loadings from point sources);

LA = Load Allocation (i.e., loadings from nonpoint sources including natural background); and

MOS = Margin of Safety.

TMDLs can be expressed in terms of either mass per time, toxicity or other appropriate measure [40 CFR, Part 130.2 (i)]. However, in light of legal action, the US EPA has issued guidance that TMDLs should be expressed on a daily timescale to meet the wording of the legislation that created the program. Yet for lakes, daily nutrient loading limits are of little use in management, as lakes integrate loading over a much longer time period to manifest observed conditions. Expression of nutrient loads on seasonal to annual time scales is appropriate, although daily loads will be reported to meet program guidelines.

The MOS can be either explicit or implicit. If an explicit MOS is used, a portion of the total target load is allocated to the MOS. If the MOS is implicit, a specific value is not assigned to the MOS. Use of an implicit MOS may be appropriate when assumptions used to develop the TMDL are believed to be so conservative that they sufficiently account for the MOS.

### 1.3 Potential approaches to Derivation of TP target values.

While the need for development of nutrient criteria for lakes is well-documented, there is no clear consensus among the States or federal agencies regarding the best means to accomplish this goal, due to the complexity in defining precisely what concentrations will be protective of waterbodies' water quality as well as their designated uses. Some of the more common approaches include:

- Use of NH DES water quality recommendations;
- Use of nutrient levels for commonly accepted trophic levels; and
- Use of probabilistic equations to establish targets to reduce risk of adverse conditions.

#### 1.3.1 Target based on population of NH lakes

In the *Lake and Reservoir Technical Guidance Manual* (US EPA, 2000a), the US EPA provided a statistical approach for determining nutrient criteria that was subsequently used to develop a set of ecoregion-specific ambient water quality recommendations that were issued in 2000-2001 (US EPA, 2000b; US EPA 2000c).


The US EPA approach consists of selecting a pre-determined percentile from the distribution of measured variables from either (1) known reference lakes, (i.e., the highest quality or least impacted lakes) or (2) general population of lakes including both impaired and non-impaired lakes. The US EPA defined reference lakes as those representative of the least impacted conditions or what was considered to be the most attainable conditions for lakes within a state or ecoregion.

NH DES used a similar statistical approach when developing preliminary TP criteria for freshwaters in New Hampshire (NH DES, 2005). The NH DES evaluation identified statistically significant relationships between chl *a* and TP for lakes. Statistical relationships were based on: 1) the median of TP samples taken at one-third the water depth in unstratified lakes and at the mid-epilimnion depth in stratified lakes; and 2) the median of composite chl *a* samples of the water column to the mid-metalimnion depth in stratified lakes and to the two-thirds water depth in unstratified lakes during the summer months (June through September). A total of 168 lakes were included in the analysis of which 23 were impaired for chl *a* (i.e., lakes with chl *a* greater than or equal to 15 µg/L). Of the 23 impaired lakes, approximately 14 were stratified (60%) and 9 were unstratified (40%).

Figure A-2 shows the cumulative frequency plots for the impaired and non-impaired lakes. Based on Figure A-2, an initial TP target of 11.5 µg/L was selected. As shown, 20% of the impaired lakes and 80% of the non-impaired lakes have TP concentrations  $\leq$  11.5 µg/L which means that 20% of the non-impaired lakes have TP concentrations  $\geq$  11.5 µg/L). After rounding, a target of 12 µg/L strikes a reasonable balance between the percent of lakes that are impaired at concentrations below this level and the percent of lakes that are not impaired at concentrations above this concentration. A value of 12 µg/L is very similar to TP targets set by other methods discussed below.

Setting the TMDL based on an in-lake target concentration of 12 µg/L includes an implicit MOS for the following reasons. As discussed above, the target of 12 µg/L is primarily based on summer epilimnetic concentrations. This TMDL, however, is based on empirical models that predict mean annual TP lake concentrations assuming fully mixed conditions. Studies on other lakes indicate that mean annual

concentrations can be 14% to 40% higher than summer epilimnetic concentrations (Nurnberg 1996, 1998). A value of 15 µg/L could have been used in the models to predict the TMDL. However, in order to include an MOS, 12 µg/L was used. By setting the target equal to 12 µg/L in the models used to determine the TMDL, an implicit MOS of approximately 20% is provided.

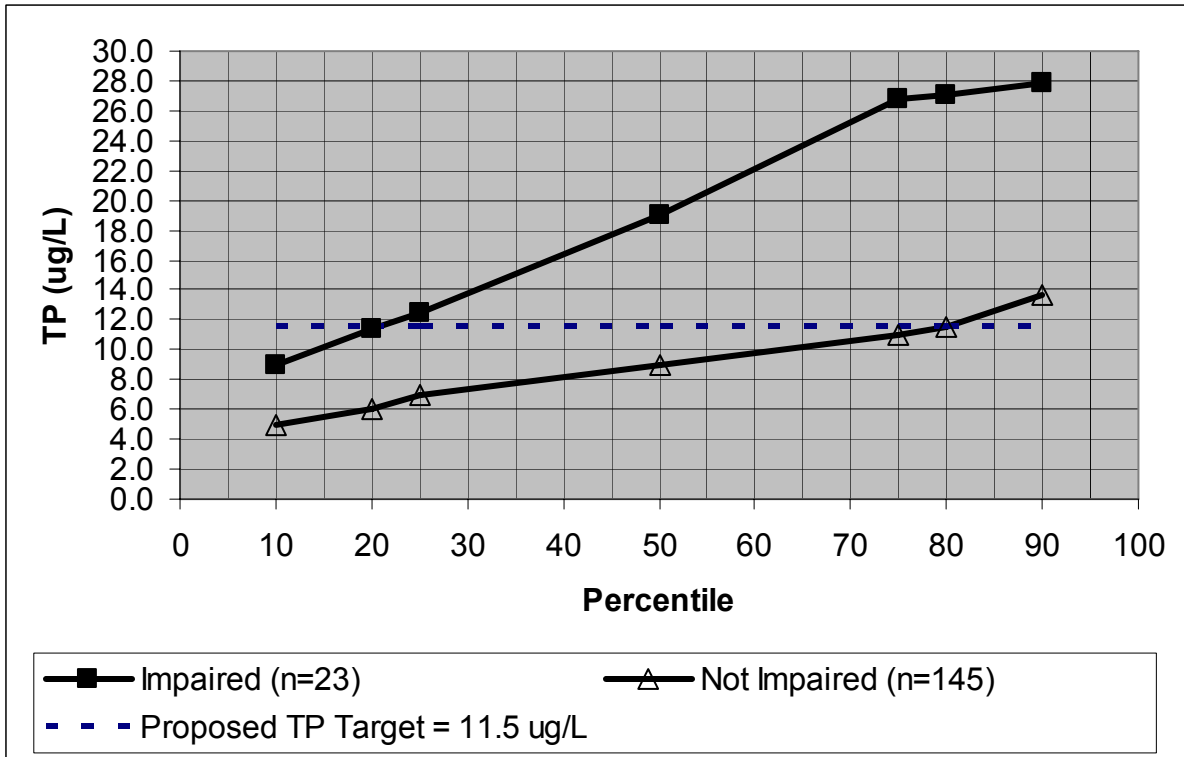

**Figure A-2: Cumulative Frequency Distribution of TP Concentrations in Impaired and Unimpaired New Hampshire Lakes.**

**1.3.2 Trophic State Classification of Water bodies**

Trophic state is an alternative means of setting a TP target concentration. One of the more powerful paradigms in limnology is the concept and classification of lakes as to their so-called trophic state. A trophic state classification is typically based on a generally recognized set or range of chemical concentrations and physical and biological responses. Lakes are generally classified as oligotrophic, mesotrophic, or eutrophic; the three states representing a gradient between least affected to most impacted waterbodies. Classification is based on the proximity of a lake’s chemistry and biology to the list of characteristic for a specific trophic type. Classification may be based on both quantitative (e.g., chemical concentrations, turbidity) and/or qualitative factors (e.g., presence of pollution-tolerant species, aesthetic appearance).

While this system is widely accepted, there is no consensus regarding the absolute nutrient or trophic parameter value that defines a waterbody trophic state, although some guidelines have been suggested (US EPA, 1999). Indeed, it should be remembered that classification of lakes into the categories produces an arbitrary difference among lakes that may show very little differences in nutrient concentration. Despite its limitations, the trophic state concept is easily understood and widely used by limnologists, lake associations, state agencies, etc., to classify lakes and manage lakes. Further, it can be used as an indirect means of linking

impairment of designated uses with critical nutrient levels or threshold values (i.e., the transition from one trophic state to another is likely associated with effects on designated uses).

To provide a means of quantifying the decision-making about trophic classification, waterbodies may be classified according to the Carlson Trophic State Index (TSI), a widely used indicator of trophic state (Carlson 1977). Carlson's TSI is an algal biomass-based index that relates the relationship between trophic parameters to levels of lake productivity. The TSI method provides three equations relating log-transformed concentrations of TP, chl *a*, and SDT to algal biomass, resulting in three separate TSI scores (e.g., TSI(TP), TSI(chl *a*), TSI(SDT)). The three equations are scaled such that the same TSI value should be obtained for a lake regardless of what parameter is used. Comparison of the results of the TSI system to more traditional trophic state classification identified TSI scores that are associated with the transition from one trophic state to another (Carlson, 1977).

For purposes of comparison, we initially used a system assuming thresholds or criteria for the transition from an oligotrophic to a mesotrophic state (estimated as a TSI value of 35) and for transition from a mesotrophic state to a eutrophic state (estimated as a TSI value of 50). The selected TSI thresholds are based on general lake attributes and are not specific to the New England ecoregions. However, Table A-2 represents a first approximation of the range of trophic indicators assigned to a trophic state.

**Table A-2. Trophic Status Classification based on water quality variables**

<b>Variables</b>	<b>Oligotrophic (TSI &lt; 30)</b>	<b>Mesotrophic (30 ≤ TSI &lt; 50)</b>	<b>Eutrophic (TSI &gt; 50)</b>
TP (µg/L)	<10	10-24	>24
Chl <i>a</i> (µg/L)	<1.5	1.5-7.2	>7.2
SDT (m)	>6	2-6	<2

It can be seen that the NH criterion for chl *a* (15 µg/L) will generally not be exceeded by a lake having a mesotrophic status (chl *a* of 1.5 – 7.2 µg/L). In most cases, mesotrophic conditions are also supportive of all aquatic life conditions. It can also be seen that the proposed NH criterion of 12 µg/L TP discussed in Section 1.3.1 will place the lake in the mesotrophic category. However, the ranges of concentrations considered by this approach are relatively large and alternative numeric criteria could be used equally as well. Accordingly, development or refinement based on ecoregion-specific information regarding trophic response and/or protection of designated uses was used to refine these ranges.

Based on our inspection of the water quality and biotic responses of the 30 New Hampshire lakes of this study, it appears that these lakes are more responsive to inputs of TP than the general class of national lakes that Carlson considered in devising his classes. For example, AECOM considers it likely that allowing > 20 µg/L TP for an in-lake surface concentration will result in eutrophic lake conditions in these lakes and uses that contention as justification to narrow the range of appropriate mean concentrations to 10-20 µg/L. The midpoint of this range is approximately 15 µg/L. An annual mean concentration of 15 µg/L TP is also coincidentally the threshold value for mesotrophic lakes used by the New Hampshire Lay Lakes Monitoring Program (LLMP) (Craycraft and Schloss, 2005).

The trophic status classification is assumed to be based on mean annual TP. However, most water quality samples are taken during summer conditions. Total algal growth is typically predicted from spring turnover TP values, which tend to be higher by approximately 20% on mean (Nurnberg, 1996, 1998). Therefore, using a

TP target of 20% lower than 15 µg/L would more appropriately predict the actual potential chl a. An implicit MOS of 20% would result in a target concentration for Pawtuckaway Lake of 12 µg/L.

**2010 UPDATE:** In 2009, NHDES developed interim TP and chl a criteria based on lake trophic level for the protection of aquatic life (NHDES, 2009) which were used to develop the 2010 303(d) list (NHDES, 2010b). The study evaluated median chl a and TP concentrations for 233 lakes and developed interim criterion using the reference concentration approach (EPA, 2000d). Reference lakes were defined as lakes with average specific conductance values less than 50 µS/cm. As shown in the table below, the criteria vary by trophic class where the trophic class is based on NHDES trophic evaluations. Where multiple trophic evaluations have been conducted, the best (i.e. cleanest) trophic class is used to determine the appropriate criterion. The “best” trophic class for Pawtuckaway Lake is mesotrophic. In accordance with the 2010 Consolidated Listing and Assessment Methodology (NHDES, 2010a), the medians are based on summer data (i.e., samples taken from May 24th to September 15th).

	Median TP (ug/L)	Median Chl (ug/L)
<b>Oligotrophic</b>	< 8.0	< 3.3
<b>Mesotrophic</b>	<=12.0	<= 5.0
<b>Eutrophic</b>	<= 28	<= 11

To be fully protective, the target used in the TMDL should be most stringent TP needed to protect all designated uses. As mentioned, the criteria shown in the table above are for the protection of the aquatic life use. As discussed in the previous section, the median TP for the protection of primary contact recreational uses (i.e., swimming) should be no greater than 12 µg/L. Consequently, if the lake is eutrophic or mesotrophic, the target TP was set equal to 12 µg/L in order to be protective of both uses. However, if a lake is oligotrophic, the target TP was set equal to 8 µg/L since this is more stringent than the 12 µg/L threshold for the protection of primary contact recreation. Since Pawtuckaway Lake is mesotrophic, the target TP is 12 µg/L. As discussed in section 1.4, the only exception to this rule is if the predicted TP concentration under “natural” conditions (i.e., no anthropogenic sources) exceeded the TP target discussed above. When this situation occurred, the target was set equal to the natural TP concentration. As discussed in section 6.1 (see Table 6-2), the predicted natural TP concentration is less than 12 µg/L, therefore the target TP is 12 µg/L.

### 1.3.3. Probabilistic Approach to Setting TP Target Goal

Target TP goals can also be determined using a probabilistic approach that aims at reducing the level and frequency of deleterious algal blooms (as indicated by chl a levels). The concept is to set a TP criterion that achieves a desired probability (i.e., risk) level of incurring an algal bloom in a lake system. Based on the level of acceptable risk or how often a system can experience an exceedance of an adverse condition (in this case defined as a chl a level of 15 µg/L), the TP criterion is selected.

Water quality modeling performed by Walker (1984, 2000) provides a means to calculate the TP level associated with any set level of exceedance of any set target level. For these TMDLs, the goal is to minimize the potential risk of exceedance of 15 µg/L chl a (summer algal bloom), but not place the criterion so low that it



could not realistically be achieved due to TP contributions from natural background conditions. The corresponding TP concentration is used as the basis for developing target TMDLs, although not as the final target TP value, since it incorporates no MOS factor and does not account for uncertainty in the TP loading and concentration estimates.

Based on our analysis of Pawtuckaway Lake, the TP concentration of 12 µg/L corresponded to a potential risk of exceedance of 15 µg/L chl *a* in summer of 0.1%, consistent with the target value of 12 µg/L derived in Section 1.3.2 above and suggesting that a TP value close to 12 µg/L would lead to the desired low probability of summer algal blooms and a mean chl *a* level that will support all expected lake uses.

For this method, the MOS is implicit due to conservative assumptions because the Walker bloom probability model is based on summer water quality data. However, the TP concentrations predicted by the ENSR-LRM model are annual mean concentrations which are typically higher than summer values. Applying the bloom probability model to annual mean concentrations rather than lower summer concentrations will result in an overestimate of the probability of blooms occurring in the summer.

#### 1.4 Summary of Derivation of TP Target Goal

As part of its US EPA/NH DES contract for developing TMDLs for 30 nutrient-impaired New Hampshire waterbodies, AECOM developed an approach and rationale for deriving numeric TP target values for determining acceptable watershed nutrient loads. These TP target values are protective of the water uses and correlate to lake conditions under which the existing New Hampshire chl *a*, cyanobacteria, and DO assessment criteria are met.

To derive these criteria, AECOM considered the following options: (1) examination of the distribution of TP concentrations in impaired and unimpaired lakes in New Hampshire; (2) use of nutrient levels for commonly-accepted trophic levels; and (3) use of probabilistic equations to establish targets to reduce risk of adverse conditions. All three approaches yield a similar target value. Because the first option uses data from New Hampshire lakes, it is viewed as the primary target setting method. The other two methods confirm the result of the first method, a target of 12 µg/L is appropriate. This target would lead to the desired low probability of algal blooms and a mean chl *a* level that supports all expected lake uses. Based on the data that went in the data for these analyses, there is an MOS of approximately 20%.

For watersheds that do not have permitted discharges such as MS4 systems (i.e., WLA = 0), the LA term simplifies to the amount of watershed TP load needed to produce a modeled in-lake concentration of 12 µg/L. Urban watersheds will need to account for the influence of stormwater when determining acceptable loads.

Based on the above discussion, a target value of 12 µg/L TP will be used to establish target TP loading for the 30 nutrient New Hampshire TMDLs. However there are a few exceptions:

- If modeling indicates that TP loadings under “natural” conditions will result in TP concentrations greater than 12 µg/L, then the TMDL target will be set equal to the modeled TP concentration corresponding to the all natural loading scenario for that lake. There is no need, nor is it usually feasible, to reduce loadings below those occurring under natural conditions. Furthermore, state surface water quality standards allow exceedances of criteria (i.e, targets) if they are due to naturally occurring conditions. For example, Env-Wq 1703.14 (b) states the following:

“Class B waters shall contain no TP or nitrogen in such concentrations that would impair any existing or designated uses, unless naturally occurring.”



- If observed monitoring data indicates actual chl *a* violations are occurring in the lake at TP concentrations less than 12 µg/L, then the target shall be set equal to either 1) the median concentration of the sampling data with a 20% reduction to incorporate a MOS (or another percent reduction determined appropriate for that particular lake) or 2) to the modeled concentration corresponding to background (i.e. natural) conditions.

**2010 UPDATE: As discussed in section 1.3.2, the lowest (i.e., most stringent) criterion needed to protect the aquatic life and primary contact recreational uses was used as the target unless the predicted natural TP concentration was higher, in which case the target TP was set equal to the natural TP target. For reasons discussed in section 1.3.2 above, a target TP of 12 ug/L was selected for Robinson Pond.**

**Appendix B:**

**ENSR-LRM Methodology Documentation**

## **APPENDIX B:**

# **LLRM – Lake Loading Response Model Users Guide (also called SHEDMOD or ENSR-LRM)**

### **Model Overview**

The Lake Loading Response Model, or LLRM, originated as a teaching tool in a college course on watershed management, where it was called SHEDMOD. This model has also been historically called ENSR-LRM. The intent was to provide a spreadsheet program that students could use to evaluate potential consequences of watershed management for a target lake, with the goal of achieving desirable levels of phosphorus (TP), nitrogen (N), chlorophyll a (Chl) and Secchi disk transparency (SDT). For the NH Lake TMDLs only TP, Chl and SDT were simulated. As all cells in the spreadsheet are visible, the effect of actions could be traced throughout the calculations and an understanding of the processes and relationships could be developed.

LLRM remains spreadsheet based, but has been enhanced over the years for use in watershed management projects aimed at improving lake conditions. It is still a highly transparent model, but various functions have been added and some variables have been refined as new literature has been published and experience has been gained. It is adaptable to specific circumstances as data and expertise permit, but requires far less of each than more complex models such as SWAT or BASINS. This manual provides a basis for proper use of LLRM.

### **Model Platform**

LLRM runs within Microsoft Excel. It consists of three numerically focused worksheets within a spreadsheet:

1. Reference Variables – Provides values for hydrologic, export and concentration variables that must be entered for the model to function. Those shown are applicable to the northeastern USA, and some would need to be changed to apply to other regions.
2. Calculations – Uses input data to generate estimates of water, N and TP loads to the lake. All cells shaded in blue must have entries if the corresponding input or process applies to the watershed and lake. If site-specific values are unavailable, one typically uses the median value from the Reference Variables sheet.
3. Predictions – Uses the lake area and inputs calculated in the Calculations sheet to predict the long-term, steady state concentration of N, TP and Chl in the lake, plus the corresponding SDT. This sheet applies five empirical models and provides the average final results from them.

### **Watershed Schematic**

Generation of a schematic representation of the watershed is essential to the model. It is not a visible part of the model, but is embodied in the routing of water and nutrients performed by the model and it is a critical step. For the example provided here, the lake and watershed shown in Figure 1 is modeled. It consists of a land area of 496.5 hectares (ha) and a lake with an area of 40 ha. There are two defined areas of direct drainage (F and G), from which water reaches the lake by overland sheetflow, piped or ditched stormwater drainage, or groundwater seepage (there are no tributaries in these two drainage basins). There is also a tributary (Trib 1) that is interrupted by a small pond, such that the corresponding watershed might best be represented as two parts, upstream and downstream of that pond, which will provide some detention and nutrient removal functions. There is another tributary (Trib 2) that consists of two streams that combine to form one that then enters the lake, the classic “Y” drainage pattern. With differing land uses associated with each of the upper parts of the Y and available data for each near the confluence, this part of the watershed is best subdivided into three drainage areas. As shown in Figure 2, the watershed of Figure 1 is represented as the lake with two direct drainage units, a tributary with an upper and lower drainage unit, and a tributary with two upper and one lower drainage units. The ordering is important on several levels, most notably as whatever nutrient loading

attenuation occurs in the two lower tributary basins will apply to loads generated in the corresponding upper basins. Loads are generated and may be managed in any of the drainage basins, but how they affect the lake will be determined by how those loads are processed on the way to the lake. LLRM is designed to provide flexibility when testing management scenarios, based on watershed configuration and the representation of associated processes.

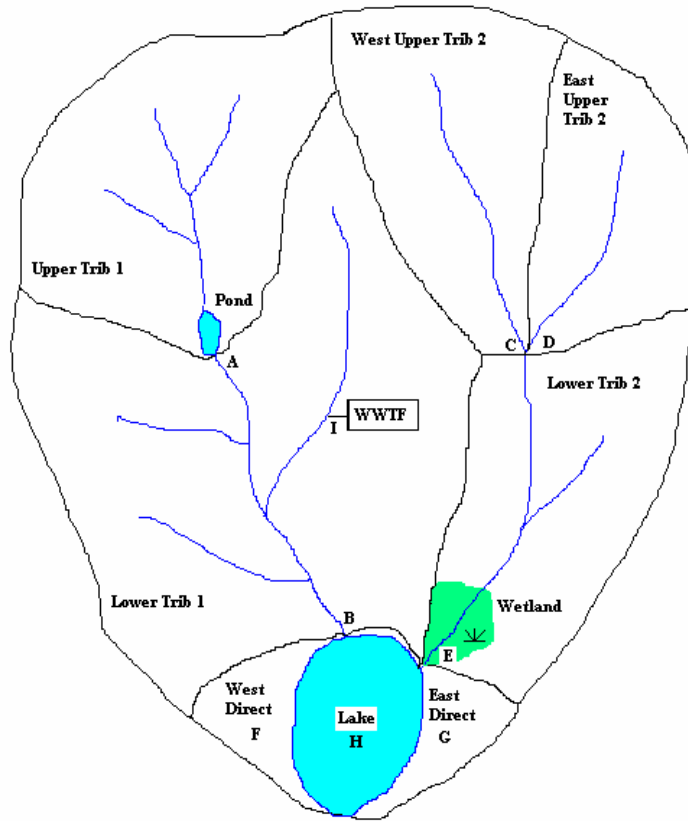


Figure 1. Watershed Map for Example System

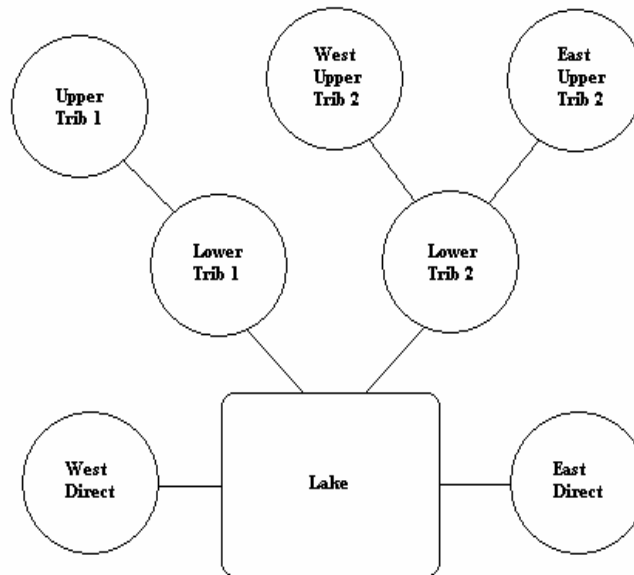


Figure 2. Watershed Schematic for Example System

### Model Elements

There are three main types of inputs necessary to run LLRM:

1. Hydrology inputs – These factors govern how much water lands on the watershed and what portion is converted to runoff or baseflow. The determination of how much precipitation becomes runoff vs. baseflow vs. deep groundwater not involved in the hydrology of the target system vs. loss to evapotranspiration is very important, and requires some knowledge of the system. All precipitation must be accounted for, but all precipitation will not end up in the lake. In the northeast, runoff and baseflow may typically account for one to two thirds of precipitation, the remainder lost to evapotranspiration or deep groundwater that may feed surface waters elsewhere, but not in the system being modeled. As impervious surface increases as a percent of total watershed area, more precipitation will be directed to runoff and less to baseflow. There are two routines in the model to allow “reality checks” on resultant flow derivations, one using a standard areal water yield based on decades of data for the region or calculated from nearby stream gauge data, and the other applying actual measures of flow to check derived estimates.
2. Nutrient yields – Export coefficients for N and TP determine how much of each is generated by each designated land use in the watershed. These export values apply to all like land use designations; one cannot assign a higher export coefficient to a land use in one basin than to the same land use in another basin. Differences are addressed through attenuation. This is a model constraint, and is imposed partly for simplicity and partly to prevent varied export assignment without justification. Where differing export really does exist for the same land uses in different basins of the watershed, attenuation can be applied to adjust what actually reaches the lake. Nutrient export coefficients abound in the literature, and ranges, means and medians are supplied in the Reference Variables sheet. These are best applied with some local knowledge of export coefficients, which can be calculated from land area, flow and nutrient concentration data. However, values calculated from actual data will include attenuation on the way to the point of measurement. As attenuation is treated separately in this model, one must determine the pre-attenuation export coefficients for entry to initiate the model. The model provides a calculation of the export coefficient for the “delivered” load that allows more direct comparison with any exports directly calculated from data later in the process.
3. Other nutrient inputs – five other sources of N and TP are recognized in the model:
  - a. Atmospheric deposition – both wet and dry deposition occur and have been well documented in the literature. The area of deposition should be the entire lake area. Choice of an export coefficient can be adjusted if real data for precipitation and nutrient concentrations is available.
  - b. Internal loading – loads can be generated within the lake from direct release from the sediment (dissolved TP, ammonium N), resuspension of sediment (particulate TP or N) with possible dissociation from particles, or from macrophytes (“leakage” or senescence). All of these modes have been studied and can be estimated with a range, but site specific data for surface vs. hypolimnetic concentrations, pre-stratification whole water column vs. late summer hypolimnetic concentrations, changes over time during dry periods (limited inflow), or direct sediment measures can be very helpful when selecting export coefficients.
  - c. Waterfowl and other wildlife – Inputs from various bird species and other water dependent wildlife (e.g., beavers, muskrats, mink or otter) have been evaluated in the literature. Site specific data on how many animals use the lake for how long is necessary to generate a reliable estimate.
  - d. Point sources – LLRM allows for up to three point sources, specific input points for discharges with known quantity and quality. The annual volume, average concentration, and basin where the input occurs must be specified.
  - e. On-site wastewater disposal (septic) systems – Septic system inputs in non-direct drainage basins is accounted for in baseflow export coefficients, but a separate process is provided for direct drainage areas where dense housing may contribute disproportionately. The number of houses in two zones (closer and farther away, represented here as <100 ft and 100-300 ft from the lake) can be specified, with occupancy set at either seasonal (90 days) or year round (365 days). For the NH lake nutrient TMDLs, one zone of 125 feet from the lake was used. The number of people per household, water use per person per day, and N and TP concentrations and attenuation factors must be specified. Alternatively, these inputs can be accounted for in the baseflow export coefficient for direct drainage



areas if appropriate data are available, but this module allows estimation from what is often perceived as a potentially large source of nutrients.

LLRM then uses the input information to make calculations that can be examined in each corresponding cell, yielding wet and dry weather inputs from each defined basin, a combined total for the watershed, a summary of other direct inputs, and total loads of TP and N to the lake, with an overall average concentration for each as an input level. Several constraining factors are input to govern processes, such as attenuation, and places to compare actual data to derived estimates are provided. Ultimately, the lake area and loading values are transferred to the Prediction sheet where, with the addition of an outflow TP concentration and lake volume, estimation of average in-lake TP, N, Chl and SDT is performed. The model is best illustrated through an example, which is represented by the watershed in Figures 1 and 2. Associated tables are directly cut and pasted from the example model runs.

**Hydrology**

Water is processed separately from TP and N in LLRM. While loading of water and nutrients are certainly linked in real situations, the model addresses them separately, then recombines water and nutrient loads later in the calculations. This allows processes that affect water and nutrient loads differently (e.g., many BMPs) to be handled effectively in the model.

**Water Yield**

Where a cell is shaded, an entry must be made if the corresponding portion of the model is to work. For the example watershed, the standard yield from years of data for a nearby river, to which the example lake eventually drains, is 1.6 cubic feet per square mile (cfs) as shown below. That is, one can expect that in the long term, each square mile of watershed will generate 1.6 cubic feet per second (cfs). This provides a valuable check on flow values derived from water export from various land uses later in the model.

**COEFFICIENTS**

STD. WATER YIELD (CFSM)	1.6
PRECIPITATION (METERS)	1.21

**Precipitation**

The precipitation landing on the lake and watershed, based on years of data collected at a nearby airport, is 1.21 m (4 ft, or 48 inches) per year, as shown above. Certainly there will be drier and wetter years, but this model addresses the steady state condition of the lake over the longer term.

**Runoff and Baseflow Coefficients**

Partitioning coefficients for water for each land use type have been selected from literature values and experience working in this area. Studies in several of the drainage basins to the example lake and for nearby tributaries outside this example system support the applied values with real data. It is expected that the sum of export coefficients for runoff and baseflow will be <1.0; some portion of the precipitation will be lost to deep groundwater or evapotranspiration.

LAND USE	RUNOFF EXPORT COEFF.			BASEFLOW EXPORT COEFF.		
	Precip	P Export	N Export	Precip	P Export	N Export
	Coefficient (Fraction)	Coefficient (kg/ha/yr)	Coefficient (kg/ha/yr)	Coefficient (Fraction)	Coefficient (kg/ha/yr)	Coefficient (kg/ha/yr)
Urban 1 (Residential)	0.30	0.65	5.50	0.15	0.010	5.00
Urban 2 (Roads)	0.40	0.75	5.50	0.10	0.010	5.00
Urban 3 (Mixed Urban/Commercial)	0.60	0.80	5.50	0.05	0.010	5.00
Urban 4 (Industrial)	0.50	0.70	5.50	0.05	0.010	5.00
Urban 5 (Parks, Recreation Fields, Institutional)	0.10	0.80	5.50	0.05	0.010	5.00
Agric 1 (Cover Crop)	0.15	0.80	6.08	0.30	0.010	2.50
Agric 2 (Row Crop)	0.30	1.00	9.00	0.30	0.010	2.50
Agric 3 (Grazing)	0.30	0.40	5.19	0.30	0.010	5.00
Agric 4 (Feedlot)	0.45	224.00	2923.20	0.30	0.010	25.00
Forest 1 (Upland)	0.10	0.20	2.86	0.40	0.005	1.00
Forest 2 (Wetland)	0.05	0.10	2.86	0.40	0.005	1.00
Open 1 (Wetland/Lake)	0.05	0.10	2.46	0.40	0.005	0.50
Open 2 (Meadow)	0.05	0.10	2.46	0.30	0.005	0.50
Open 3 (Excavation)	0.40	0.80	5.19	0.20	0.005	0.50
Other 1	0.10	0.20	2.46	0.40	0.050	0.50
Other 2	0.35	1.10	5.50	0.25	0.050	5.00
Other 3	0.60	2.20	9.00	0.05	0.050	20.00

Setting export coefficients for the division of precipitation between baseflow, runoff and other components (deep groundwater, evapotranspiration) that do not figure into this model is probably the hardest part of model set-up. Site specific data are very helpful, but a working knowledge of area hydrology and texts on the subject is often sufficient. This is an area where sensitivity testing is strongly urged, as some uncertainty around these values is to be expected. There is more often dry weather data available for tributary streams than wet weather data, and some empirical derivation of baseflow coefficients is recommended. Still, values are being assigned per land use category, and most basins will have mixed land use, so clear empirical validation is elusive. As noted, sensitivity testing by varying these coefficients is advised to determine the effect on the model of the uncertainty associated with this difficult component of the model.

## Nutrient Yields for Land Uses

### Phosphorus and Nitrogen in Runoff

The values applied in the table above are not necessarily the medians from the Reference Variables sheet, since there are data to support different values being used here. There may be variation across basins that is not captured in the table below, as the same values are applied to each land use in each basin; that is a model constraint. Values for "Other" land uses are inconsequential in this case, as all land uses are accounted for in this example watershed without creating any special land use categories. Yet if a land use was known to have strong variation among basins within the watershed, the use of an "Other" land use class for the strongly differing land use in one or another basin could incorporate this variability.

### Phosphorus and Nitrogen in Baseflow

Baseflow coefficients are handled the same way as for runoff coefficients above. While much of the water is likely to be delivered with baseflow, a smaller portion of the TP and N loads will be delivered during dry weather, as the associated water first passes through soil. In particular, TP is removed effectively by many soils, and transformation of nitrogen among common forms is to be expected.

The table above is commonly adjusted to calibrate the model, but it is important to justify all changes. Initial use of the median TP export value for a land use may be based on a lack of data or familiarity with the system, and when the results strongly over- or under-predict actual in-lake concentrations, it may be necessary to adjust the export value for one or more land use categories to achieve acceptable agreement. However, this should not be done without a clear understanding of why the

value is probably higher or lower than represented by the median; the model should not be blindly calibrated, and field examination of conditions that affect export values is strongly recommended.

**Other Nutrient Inputs**

**Atmospheric Deposition**

Both wet and dry deposition nutrient inputs are covered by the chosen values, and are often simple literature value selections. Where empirical data for wet or dry fall are available, coefficients should be adjusted accordingly. Regional data are often available and can be used as a reality check on chosen values. Choices of atmospheric export coefficients are often based on dominant land use in the contributory area (see Reference Variables sheet), but as the airshed for a lake is usually much larger than the watershed, it is not appropriate to use land use from the watershed as the sole criterion for selecting atmospheric export coefficients. Fortunately, except where the lake is large and the watershed is small, atmospheric inputs tend not to have much influence on the final concentrations of TP or N in the lake, so this is not a portion of the model on which extreme investigation is usually necessary.

For the example system, a 40 ha lake is assumed to receive 0.2 kg TP/ha/yr and 6.5 kg N/ha/yr, the median values from the Reference Variables sheet. The model then calculates the loads in kg/yr to the lake and uses them later in the summary.

AREAL SOURCES										
	Affected Lake Area (ha)	P Export Coefficient (kg/ha/yr)	N Export Coefficient (kg/ha/yr)	P Load (from coeff) (kg/yr)	N Load (from coeff) (kg/yr)	Period of Release (days)	P Rate of Release (mg/m2/day)	N Rate of Release (mg/m2/day)	P Load (from rate) (kg/yr)	N Load (from rate) (kg/yr)
Direct Atmospheric Deposition	40	0.20	6.50	8	260					
Internal Loading	20	2.00	5.00	40	100	100	2.00	5.00	40	100

**Internal Loading**

Internal release of TP or N is generally described as a release rate per square meter per day. It can be a function of direct dissolution release, sediment resuspension with some dissociation of available nutrients, or release from rooted plants. The release rate is entered as shown in the table above, along with the affected portion of the lake, in this case half of the 40 ha area, or 20 ha. The period of release must also be specified, usually corresponding to the period of deepwater anoxia or the plant growing season. The model then calculates a release rate as kg/ha/yr and a total annual load as shown in the table above.

For the NH lake nutrient TMDLs, the release rate from internal loading was calculated using water quality data (pre-stratification vs. late summer hypolimnetic TP concentrations or late summer hypolimnetic vs. late summer epilimnetic TP concentrations) and dividing by the anoxic area of the lake.

**Waterfowl or Other Wildlife**

Waterfowl or other wildlife inputs are calculated as a direct product of the number of animal-years on the lake (e.g., 100 geese spending half a year = 50 bird-years) and a chosen input rate in kg/animal/yr, as shown in the table below. Input rates are from the literature as shown in the Reference Variables sheet, while animal-years must be estimated for the lake.

NON-AREAL SOURCES										
	Number of Source Units	Volume (cu.m/yr)	P Load/Unit (kg/unit/yr)	N Load/Unit (kg/unit/yr)	P Conc. (ppm)	N Conc. (ppm)	P Load (kg/yr)	N Load (kg/yr)		
Waterfowl	50		0.20	0.95			10	47.5		
Point Sources										
PS-1		45000			3.00	12.00	135	540		
PS-2		0			3.00	12.00	0	0		
PS-3		0			3.00	12.00	0	0		
Basin in which Point Source occurs (0=NO 1=YES)										
	BASIN 1	BASIN 2	BASIN 3	BASIN 4	BASIN 5	BASIN 6	BASIN 7	BASIN 8	BASIN 9	BASIN 10
PS-1	0	0	0	1	0	0	0	0	0	0
PS-2	0	0	0	0	0	0	0	0	0	0
PS-3	0	0	0	0	0	0	0	0	0	0

**Point Source Discharges**

LLRM allows for three point source discharges. While some storm water discharges are legally considered point sources, the point sources in LLRM are intended to be daily discharge sources, such as wastewater treatment facility or cooling water discharges. The annual volume of the discharge must be entered as well as the average concentration for TP and TN, as shown in the table above. The model then calculates the input of TP and TN. It is also essential to note which basin receives the discharge, denoted by a 1 in the appropriate column. As shown in the table above, the example system has a discharge in Basin 4, and no discharges in any other basin (denoted by 0).

**On-Site Wastewater Disposal Systems**

While the input from septic systems in the direct drainage areas around the lake can be addressed through the baseflow export coefficient, separation of that influence is desirable where it may be large enough to warrant management consideration. In such cases, the existing systems are divided into those within 100 ft of the lake and those between 100 and 300 ft of the lake, each zone receiving potentially different attenuation factors. For the NH lake TMDLs, a single 125 foot zone was used. A further subdivision between dwelling occupied all year vs. those used only seasonally is made. The number of people per dwelling and the water use per person per day are specified, along with the expected concentrations of TP and TN in septic system effluent, as shown in the table below. The model then calculates the input of water, TP and TN from each septic system grouping. If data are insufficient to subdivide systems along distance or use gradients, a single line of this module can be used with average values entered.

DIRECT SEPTIC SYSTEM LOAD												
Septic System Grouping (by occupancy or location)	Days of Occupancy/Y r	Distance from Lake (ft)	Number of Dwellings	Number of People per Dwelling	Water per Person per Day (cu.m)	P Conc. (ppm)	N Conc. (ppm)	P Attenuation Factor	N Attenuation Factor	Water Load (cu.m/yr)	P Load (kg/yr)	N Load (kg/yr)
Group 1 Septic Systems	365	<100	25	2.5	0.25	8	20	0.2	0.9	5703	9.1	102.7
Group 2 Septic Systems	365	100 - 300	75	2.5	0.25	8	20	0.1	0.8	17109	13.7	273.8
Group 3 Septic Systems	90	<100	50	2.5	0.25	8	20	0.2	0.9	2813	4.5	50.6
Group 4 Septic Systems	90	100 - 300	100	2.5	0.25	8	20	0.1	0.8	5625	4.5	90.0
Total Septic System Loading										31250	31.8	517.0

**Subwatershed Functions**

The next set of calculations addresses inputs from each defined basin within the system. Basins can be left as labeled, 1, 2, 3, etc., or the blank line between Basin # and Area (Ha) can be used to enter an identifying name. In this case, basins have been identified as the East Direct drainage, the West Direct drainage, Upper Tributary #1, Lower Tributary #1, East Upper Tributary #2, West Upper Tributary #2, and Lower Tributary #2, matching the watershed and schematic maps in Figures 1 and 2.

**Land Uses**

The area of each defined basin associated with each defined land use category is entered, creating the table below. The model is set up to address up to 10 basins; in this case there are only seven defined basins, so the other three columns are left blank and do not figure in to the calculations. The total area per land use and per basin is summed along the right and bottom of the table. Three "Other" land use lines are provided, in the event that the standard land uses provided are inadequate to address all land uses identified in a watershed. It is also possible to split a standard land use category using one of the "Other" lines, where there is variation in export coefficients within a land use that can be documented and warrants separation.

Land use data is often readily available in GIS formats. It is always advisable to ground truth land use designation, especially in rapidly developing watersheds. The date on the land use maps used as sources should be as recent as possible.

BASIN AREAS	BASIN 1	BASIN 2	BASIN 3	BASIN 4	BASIN 5	BASIN 6	BASIN 7	BASIN 8	BASIN 9	BASIN 10	TOTAL
	E. Direct	W. Direct	Upper T1	Lower T1	W. Upper T2	E. Upper T2	Lower T2				
LAND USE	AREA (HA)	AREA (HA)	AREA (HA)	AREA (HA)	AREA (HA)	AREA (HA)	AREA (HA)	AREA (HA)	AREA (HA)	AREA (HA)	AREA (HA)
Urban 1 (Residential)	12.0	8.5	8.4	47.4	6.7	4.5	18.1				105.5
Urban 2 (Roads)	3.7	5.5	0.0	5.9	0.8	0.6	2.3				18.8
Urban 3 (Mixed Urban/Commercial)	3.6	5.8	0.0	5.9	0.8	0.6	2.3				19.0
Urban 4 (Industrial)	0.0	0.0	0.0	23.5	0.0	0.0	0.0				23.5
Urban 5 (Parks, Recreation Fields, Institutional)	0.0	3.2	0.0	0.0	0.0	0.0	0.0				3.2
Agric 1 (Cover Crop)	0.0	0.0	0.0	0.8	12.3	0.0	0.0				13.1
Agric 2 (Row Crop)	0.0	0.0	0.0	0.0	16.2	0.0	0.0				16.2
Agric 3 (Grazing)	0.0	0.0	0.0	0.0	4.0	0.0	0.0				4.0
Agric 4 (Feedlot)	0.0	0.0	0.0	0.0	0.5	0.0	0.0				0.5
Forest 1 (Upland)	7.7	17.5	50.3	90.3	9.2	32.0	33.6				240.6
Forest 2 (Wetland)	0.0	0.2	0.0	14.5	0.0	0.0	1.9				16.6
Open 1 (Wetland/Lake)	2.5	0.6	2.0	0.1	0.0	0.1	14.2				19.4
Open 2 (Meadow)	2.0	1.3	0.0	10.2	0.1	0.0	0.2				13.8
Open 3 (Excavation)	0.1	0.1	0.0	2.3	0.0	0.0	0.0				2.5
Other 1											0.0
Other 2											0.0
Other 3											0.0
<b>TOTAL</b>	<b>31.6</b>	<b>42.6</b>	<b>60.7</b>	<b>200.9</b>	<b>50.6</b>	<b>37.7</b>	<b>72.4</b>	<b>0</b>	<b>0</b>		<b>496.5</b>

**Load Generation**

At this point, the model will perform a number of calculations before any further input is needed. These are represented by a series of tables with no shaded cells, and include calculation of water, TP and TN loads from runoff and baseflow as shown below. These loads are intermediate products, not subject to attenuation or routing, and have little utility as individual values. They are the precursors of the actual loads delivered to the lake, which require some additional input information.

WATER LOAD GENERATION: RUNOFF											
LAND USE	BASIN 1	BASIN 2	BASIN 3	BASIN 4	BASIN 5	BASIN 6	BASIN 7	BASIN 8	BASIN 9	BASIN 10	TOTAL
	E. Direct	W. Direct	Upper T1	Lower T1	W. Upper T2	E. Upper T2	Lower T2				
	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)
Urban 1 (Residential)	43560	30855	30492	172056	24182	16277	65563	0	0	0	382985
Urban 2 (Roads)	18005	26457	0	28676	4030	2713	10927	0	0	0	90808
Urban 3 (Mixed Urban/Commercial)	26136	42108	0	43014	6045	4069	16391	0	0	0	137763
Urban 4 (Industrial)	0	0	0	142175	0	0	0	0	0	0	142175
Urban 5 (Parks, Recreation Fields, Institutional)	0	3872	0	0	0	0	0	0	0	0	3872
Agric 1 (Cover Crop)	0	0	0	1387	22325	0	0	0	0	0	23712
Agric 2 (Row Crop)	0	0	0	0	58806	0	0	0	0	0	58806
Agric 3 (Grazing)	0	0	0	0	14520	0	0	0	0	0	14520
Agric 4 (Feedlot)	0	0	0	0	2723	0	0	0	0	0	2723
Forest 1 (Upland)	9325	21175	60863	109263	11126	38720	40600	0	0	0	291073
Forest 2 (Wetland)	0	150	0	8746	0	0	1153	0	0	0	10049
Open 1 (Wetland/Lake)	1494	334	1210	56	0	37	8591	0	0	0	11722
Open 2 (Meadow)	1210	768	0	6199	38	0	122	0	0	0	8336
Open 3 (Excavation)	593	454	0	10991	0	0	0	0	0	0	12038
Other 1	0	0	0	0	0	0	0	0	0	0	0
Other 2	0	0	0	0	0	0	0	0	0	0	0
Other 3	0	0	0	0	0	0	0	0	0	0	0
<b>TOTAL (CU.M/YR)</b>	<b>100323</b>	<b>126173</b>	<b>92565</b>	<b>522564</b>	<b>143794</b>	<b>61816</b>	<b>143347</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>1190582</b>
<b>TOTAL (CFS)</b>	<b>0.11</b>	<b>0.14</b>	<b>0.10</b>	<b>0.59</b>	<b>0.16</b>	<b>0.07</b>	<b>0.16</b>	<b>0.00</b>	<b>0.00</b>	<b>0.00</b>	<b>1.33</b>

WATER LOAD GENERATION: BASEFLOW											
	BASIN 1	BASIN 2	BASIN 3	BASIN 4	BASIN 5	BASIN 6	BASIN 7	BASIN 8	BASIN 9	BASIN 10	TOTAL
	E. Direct	W. Direct	Upper T1	Lower T1	W. Upper T2	E. Upper T2	Lower T2				
	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)
Urban 1 (Residential)	21780	15428	15246	86028	12091	8139	32781	0	0	0	191492
Urban 2 (Roads)	4501	6614	0	7169	1008	678	2732	0	0	0	22702
Urban 3 (Mixed Urban/Commercial)	2178	3509	0	3585	504	339	1366	0	0	0	11480
Urban 4 (Industrial)	0	0	0	14218	0	0	0	0	0	0	14218
Urban 5 (Parks, Recreation Fields, Institutional)	0	1936	0	0	0	0	0	0	0	0	1936
Agric 1 (Cover Crop)	0	0	0	2775	44649	0	0	0	0	0	47424
Agric 2 (Row Crop)	0	0	0	0	58806	0	0	0	0	0	58806
Agric 3 (Grazing)	0	0	0	0	14520	0	0	0	0	0	14520
Agric 4 (Feedlot)	0	0	0	0	1815	0	0	0	0	0	1815
Forest 1 (Upland)	37301	84700	243452	437052	44504	154880	162402	0	0	0	1164291
Forest 2 (Wetland)	0	1203	0	69969	0	0	9220	0	0	0	80393
Open 1 (Wetland/Lake)	11953	2672	9680	450	0	294	68728	0	0	0	93777
Open 2 (Meadow)	7260	4605	0	37192	226	0	732	0	0	0	50016
Open 3 (Excavation)	297	227	0	5496	0	0	0	0	0	0	6019
Other 1	0	0	0	0	0	0	0	0	0	0	0
Other 2	0	0	0	0	0	0	0	0	0	0	0
Other 3	0	0	0	0	0	0	0	0	0	0	0
Point Source #1	0	0	0	45000	0	0	0	0	0	0	45000
Point Source #2	0	0	0	0	0	0	0	0	0	0	0
Point Source #3	0	0	0	0	0	0	0	0	0	0	0
TOTAL (CU.M/YR)	85270	120894	268378	708932	178122	164330	277961	0	0	0	1803888
TOTAL (CFS)	0.10	0.14	0.30	0.79	0.20	0.18	0.31	0.00	0.00	0.000	2.02

LOAD GENERATION: RUNOFF P											
	BASIN 1	BASIN 2	BASIN 3	BASIN 4	BASIN 5	BASIN 6	BASIN 7	BASIN 8	BASIN 9	BASIN 10	TOTAL
	E. Direct	W. Direct	Upper T1	Lower T1	W. Upper T2	E. Upper T2	Lower T2				
	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)
Urban 1 (Residential)	7.8	5.5	5.5	30.8	4.3	2.9	11.7	0.0	0.0	0.0	68.6
Urban 2 (Roads)	2.8	4.1	0.0	4.4	0.6	0.4	1.7	0.0	0.0	0.0	14.1
Urban 3 (Mixed Urban/Commercial)	2.9	4.6	0.0	4.7	0.7	0.4	1.8	0.0	0.0	0.0	15.2
Urban 4 (Industrial)	0.0	0.0	0.0	16.5	0.0	0.0	0.0	0.0	0.0	0.0	16.5
Urban 5 (Parks, Recreation Fields, Institutional)	0.0	2.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	2.6
Agric 1 (Cover Crop)	0.0	0.0	0.0	0.6	9.8	0.0	0.0	0.0	0.0	0.0	10.5
Agric 2 (Row Crop)	0.0	0.0	0.0	0.0	16.2	0.0	0.0	0.0	0.0	0.0	16.2
Agric 3 (Grazing)	0.0	0.0	0.0	0.0	1.6	0.0	0.0	0.0	0.0	0.0	1.6
Agric 4 (Feedlot)	0.0	0.0	0.0	0.0	112.0	0.0	0.0	0.0	0.0	0.0	112.0
Forest 1 (Upland)	1.5	3.5	10.1	18.1	1.8	6.4	6.7	0.0	0.0	0.0	48.1
Forest 2 (Wetland)	0.0	0.0	0.0	1.4	0.0	0.0	0.2	0.0	0.0	0.0	1.7
Open 1 (Wetland/Lake)	0.2	0.1	0.2	0.0	0.0	0.0	1.4	0.0	0.0	0.0	1.9
Open 2 (Meadow)	0.2	0.1	0.0	1.0	0.0	0.0	0.0	0.0	0.0	0.0	1.4
Open 3 (Excavation)	0.1	0.1	0.0	1.8	0.0	0.0	0.0	0.0	0.0	0.0	2.0
Other 1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Other 2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Other 3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
TOTAL	15.6	20.6	15.7	79.4	147.1	10.2	23.6	0.0	0.0	0.0	312.2

LOAD GENERATION: RUNOFF N											
	BASIN 1	BASIN 2	BASIN 3	BASIN 4	BASIN 5	BASIN 6	BASIN 7	BASIN 8	BASIN 9	BASIN 10	TOTAL
	E. Direct	W. Direct	Upper T1	Lower T1	W. Upper T2	E. Upper T2	Lower T2				
	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)
Urban 1 (Residential)	66.0	46.8	46.2	260.7	36.6	24.7	99.3	0.0	0.0	0.0	580.3
Urban 2 (Roads)	20.5	30.1	0.0	32.6	4.6	3.1	12.4	0.0	0.0	0.0	103.2
Urban 3 (Mixed Urban/Commercial)	19.8	31.9	0.0	32.6	4.6	3.1	12.4	0.0	0.0	0.0	104.4
Urban 4 (Industrial)	0.0	0.0	0.0	129.3	0.0	0.0	0.0	0.0	0.0	0.0	129.3
Urban 5 (Parks, Recreation Fields, Institutional)	0.0	17.6	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	17.6
Agric 1 (Cover Crop)	0.0	0.0	0.0	4.6	74.8	0.0	0.0	0.0	0.0	0.0	79.4
Agric 2 (Row Crop)	0.0	0.0	0.0	0.0	145.8	0.0	0.0	0.0	0.0	0.0	145.8
Agric 3 (Grazing)	0.0	0.0	0.0	0.0	20.8	0.0	0.0	0.0	0.0	0.0	20.8
Agric 4 (Feedlot)	0.0	0.0	0.0	0.0	1461.6	0.0	0.0	0.0	0.0	0.0	1461.6
Forest 1 (Upland)	22.0	50.1	143.9	258.3	26.3	91.5	96.0	0.0	0.0	0.0	688.0
Forest 2 (Wetland)	0.0	0.7	0.0	41.3	0.0	0.0	5.4	0.0	0.0	0.0	47.5
Open 1 (Wetland/Lake)	6.1	1.4	4.9	0.2	0.0	0.1	34.9	0.0	0.0	0.0	47.7
Open 2 (Meadow)	4.9	3.1	0.0	25.2	0.2	0.0	0.5	0.0	0.0	0.0	33.9
Open 3 (Excavation)	0.6	0.5	0.0	11.8	0.0	0.0	0.0	0.0	0.0	0.0	12.9
Other 1	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Other 2	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
Other 3	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
TOTAL	139.9	182.0	195.0	796.6	1775.2	122.5	261.0	0.0	0.0	0.0	3472.2

LOAD GENERATION: BASEFLOW P											
	BASIN 1	BASIN 2	BASIN 3	BASIN 4	BASIN 5	BASIN 6	BASIN 7	BASIN 8	BASIN 9	BASIN 10	TOTAL
	E. Direct	W. Direct	Upper T1	Lower T1	W. Upper T2	E. Upper T2	Lower T2				
LAND USE	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)
Urban 1 (Residential)	0.12	0.09	0.08	0.47	0.07	0.04	0.18	0.00	0.00	0.00	1.06
Urban 2 (Roads)	0.04	0.05	0.00	0.06	0.01	0.01	0.02	0.00	0.00	0.00	0.19
Urban 3 (Mixed Urban/Commercial)	0.04	0.06	0.00	0.06	0.01	0.01	0.02	0.00	0.00	0.00	0.19
Urban 4 (Industrial)	0.00	0.00	0.00	0.24	0.00	0.00	0.00	0.00	0.00	0.00	0.24
Urban 5 (Parks, Recreation Fields, Institutional)	0.00	0.03	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.03
Agric 1 (Cover Crop)	0.00	0.00	0.00	0.01	0.12	0.00	0.00	0.00	0.00	0.00	0.13
Agric 2 (Row Crop)	0.00	0.00	0.00	0.00	0.16	0.00	0.00	0.00	0.00	0.00	0.16
Agric 3 (Grazing)	0.00	0.00	0.00	0.00	0.04	0.00	0.00	0.00	0.00	0.00	0.04
Agric 4 (Feedlot)	0.00	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.01
Forest 1 (Upland)	0.04	0.09	0.25	0.45	0.05	0.16	0.17	0.00	0.00	0.00	1.20
Forest 2 (Wetland)	0.00	0.00	0.00	0.07	0.00	0.00	0.01	0.00	0.00	0.00	0.08
Open 1 (Wetland/Lake)	0.01	0.00	0.01	0.00	0.00	0.00	0.07	0.00	0.00	0.00	0.10
Open 2 (Meadow)	0.01	0.01	0.00	0.05	0.00	0.00	0.00	0.00	0.00	0.00	0.07
Open 3 (Excavation)	0.00	0.00	0.00	0.01	0.00	0.00	0.00	0.00	0.00	0.00	0.01
Other 1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other 2	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other 3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Point Source #1	0.00	0.00	0.00	135.00	0.00	0.00	0.00	0.00	0.00	0.00	135.00
Point Source #2	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Point Source #3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>TOTAL</b>	<b>0.25</b>	<b>0.33</b>	<b>0.35</b>	<b>136.42</b>	<b>0.46</b>	<b>0.22</b>	<b>0.48</b>	<b>0.00</b>	<b>0.00</b>	<b>0.00</b>	<b>138.50</b>

LOAD GENERATION: BASEFLOW N											
	BASIN 1	BASIN 2	BASIN 3	BASIN 4	BASIN 5	BASIN 6	BASIN 7	BASIN 8	BASIN 9	BASIN 10	TOTAL
	E. Direct	W. Direct	Upper T1	Lower T1	W. Upper T2	E. Upper T2	Lower T2				
LAND USE	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)
Urban 1 (Residential)	60.00	42.50	42.00	236.99	33.31	22.42	90.31	0.00	0.00	0.00	527.53
Urban 2 (Roads)	18.60	27.33	0.00	29.62	4.16	2.80	11.29	0.00	0.00	0.00	93.81
Urban 3 (Mixed Urban/Commercial)	18.00	29.00	0.00	29.62	4.16	2.80	11.29	0.00	0.00	0.00	94.88
Urban 4 (Industrial)	0.00	0.00	0.00	117.50	0.00	0.00	0.00	0.00	0.00	0.00	117.50
Urban 5 (Parks, Recreation Fields, Institutional)	0.00	16.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	16.00
Agric 1 (Cover Crop)	0.00	0.00	0.00	1.91	30.75	0.00	0.00	0.00	0.00	0.00	32.66
Agric 2 (Row Crop)	0.00	0.00	0.00	0.00	40.50	0.00	0.00	0.00	0.00	0.00	40.50
Agric 3 (Grazing)	0.00	0.00	0.00	0.00	20.00	0.00	0.00	0.00	0.00	0.00	20.00
Agric 4 (Feedlot)	0.00	0.00	0.00	0.00	12.50	0.00	0.00	0.00	0.00	0.00	12.50
Forest 1 (Upland)	7.71	17.50	50.30	90.30	9.20	32.00	33.55	0.00	0.00	0.00	240.56
Forest 2 (Wetland)	0.00	0.25	0.00	14.46	0.00	0.00	1.91	0.00	0.00	0.00	16.61
Open 1 (Wetland/Lake)	1.23	0.28	1.00	0.05	0.00	0.03	7.10	0.00	0.00	0.00	9.69
Open 2 (Meadow)	1.00	0.63	0.00	5.12	0.03	0.00	0.10	0.00	0.00	0.00	6.89
Open 3 (Excavation)	0.06	0.05	0.00	1.14	0.00	0.00	0.00	0.00	0.00	0.00	1.24
Other 1	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other 2	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Other 3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Point Source #1	0.00	0.00	0.00	540.00	0.00	0.00	0.00	0.00	0.00	0.00	540.00
Point Source #2	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Point Source #3	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
<b>TOTAL</b>	<b>106.60</b>	<b>133.54</b>	<b>93.30</b>	<b>1066.71</b>	<b>154.61</b>	<b>60.06</b>	<b>155.54</b>	<b>0.00</b>	<b>0.00</b>	<b>0.00</b>	<b>1770.36</b>

**Load Routing Pattern**

The model must be told how to route all inputs of water, TP and TN before they reach the lake. Since attenuation in an upstream basin can affect inputs in an upstream basin that passes through the downstream basin, the model must be directed as to where to apply attenuation factors and additive effects. In the table below, each basin listed on the lines labeled on the left that passes through another basin labeled by column is denoted with a 1 in the column of the basin through which it passes. Otherwise, a 0 appears in each shaded cell. All basins pass through themselves, so the first line has a 1 in each cell. Basins 1 and 2 go direct to the lake, and so all other cells on the corresponding lines have 0 entries. Basin 3 passes through Basin 4 (see Figure 2), and so the line for Basin 3 has a 1 in the column for Basin 4. Likewise, Basins 5 and 6 pass through Basin 7, so the corresponding lines have a 1 entered in the column for Basin 7.



ROUTING PATTERN										
(Basin in left hand column passes through basin in column below if indicated by a 1)										
1=YES 0=NO XXX=BLANK	BASIN 1	BASIN 2	BASIN 3	BASIN 4	BASIN 5	BASIN 6	BASIN 7	BASIN 8	BASIN 9	BASIN 10
	E. Direct	W. Direct	Upper T1	Lower T1	W. Upper T2	E. Upper T2	Lower T2			
	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)
INDIVIDUAL BASIN	1	1	1	1	1	1	1	1	1	1
BASIN 1 OUTPUT	XXX	0	0	0	0	0	0	0	0	0
BASIN 2 OUTPUT	0	XXX	0	0	0	0	0	0	0	0
BASIN 3 OUTPUT	0	0	XXX	1	0	0	0	0	0	0
BASIN 4 OUTPUT	0	0	0	XXX	0	0	0	0	0	0
BASIN 5 OUTPUT	0	0	0	0	XXX	0	1	0	0	0
BASIN 6 OUTPUT	0	0	0	0	0	XXX	1	0	0	0
BASIN 7 OUTPUT	0	0	0	0	0	0	XXX	0	0	0
BASIN 8 OUTPUT	0	0	0	0	0	0	0	XXX	0	0
BASIN 9 OUTPUT	0	0	0	0	0	0	0	0	XXX	0
BASIN 10 OUTPUT	0	0	0	0	0	0	0	0	0	XXX
CUMULATIVE DRAINAGE AREAS										
(Total land area associated with routed water and nutrients)										
1=YES 0=NO XXX=BLANK	BASIN 1	BASIN 2	BASIN 3	BASIN 4	BASIN 5	BASIN 6	BASIN 7	BASIN 8	BASIN 9	BASIN 10
	E. Direct	W. Direct	Upper T1	Lower T1	W. Upper T2	E. Upper T2	Lower T2			
	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)
INDIVIDUAL BASIN	31.6	42.6	60.7	200.9	50.6	37.7	72.4	0.0	0.0	0.0
BASIN 1 OUTPUT	XXX	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
BASIN 2 OUTPUT	0.0	XXX	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
BASIN 3 OUTPUT	0.0	0.0	XXX	60.7	0.0	0.0	0.0	0.0	0.0	0.0
BASIN 4 OUTPUT	0.0	0.0	0.0	XXX	0.0	0.0	0.0	0.0	0.0	0.0
BASIN 5 OUTPUT	0.0	0.0	0.0	0.0	XXX	0.0	50.6	0.0	0.0	0.0
BASIN 6 OUTPUT	0.0	0.0	0.0	0.0	0.0	XXX	37.7	0.0	0.0	0.0
BASIN 7 OUTPUT	0.0	0.0	0.0	0.0	0.0	0.0	XXX	0.0	0.0	0.0
BASIN 8 OUTPUT	0.0	0.0	0.0	0.0	0.0	0.0	0.0	XXX	0.0	0.0
BASIN 9 OUTPUT	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	XXX	0.0
BASIN 10 OUTPUT	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	XXX
TOTALS	31.6	42.6	60.7	261.6	50.6	37.7	160.7	0.0	0.0	0.0

The model then combines the appropriate watershed areas as shown above, generating larger sub-watersheds that are used later to calculate overall export coefficients, comparative water yields, and related checks for model accuracy.

**Load Routing and Attenuation**

With the loads calculated previously for each basin under wet and dry conditions and the routing of those loads specified, the model can then combine those loads and apply attenuation values chosen to reflect expected losses of water, TP or TN while the generated loads are on their way to the lake.

**Water**

Water is attenuated mostly by evapotranspiration losses. Some depression storage is expected, seepage into the ground is possible, and wetlands can remove considerable water on the way to the lake. In general, a 5% loss is to be expected in nearly all cases, and greater losses are plausible with lower gradient or wetland dominated landscapes. In the example system, only the lower portion of Tributary 2 is expected to have more than a 5% loss, with a 15% loss linked to the wetland associated with this drainage area and tributary (see Figure 1).

WATER ROUTING AND ATTENUATION										
	BASIN 1	BASIN 2	BASIN 3	BASIN 4	BASIN 5	BASIN 6	BASIN 7	BASIN 8	BASIN 9	BASIN 10
SOURCE	E. Direct (CU.M/YR)	W. Direct (CU.M/YR)	Upper T1 (CU.M/YR)	Lower T1 (CU.M/YR)	W. Upper T2 (CU.M/YR)	E. Upper T2 (CU.M/YR)	Lower T2 (CU.M/YR)	(CU.M/YR)	(CU.M/YR)	(CU.M/YR)
INDIVIDUAL BASIN	185594	247067	362153	1231497	321916	226145	421308	0	0	0
BASIN 1 OUTPUT	XXX	0	0	0	0	0	0	0	0	0
BASIN 2 OUTPUT	0	XXX	0	0	0	0	0	0	0	0
BASIN 3 OUTPUT	0	0	XXX	344045	0	0	0	0	0	0
BASIN 4 OUTPUT	0	0	0	XXX	0	0	0	0	0	0
BASIN 5 OUTPUT	0	0	0	0	XXX	0	305820	0	0	0
BASIN 6 OUTPUT	0	0	0	0	0	XXX	214838	0	0	0
BASIN 7 OUTPUT	0	0	0	0	0	0	XXX	0	0	0
BASIN 8 OUTPUT	0	0	0	0	0	0	0	XXX	0	0
BASIN 9 OUTPUT	0	0	0	0	0	0	0	0	XXX	0
BASIN 10 OUTPUT	0	0	0	0	0	0	0	0	0	XXX
CUMULATIVE TOTAL	185594	247067	362153	1575542	321916	226145	941966	0	0	0
BASIN ATTENUATION	0.95	0.95	0.95	0.95	0.95	0.95	0.85	1.00	1.00	1.00
OUTPUT VOLUME	176314	234714	344045	1496765	305820	214838	800671	0.0	0.0	0.0
Reality Check from Flow Data				1500000.0			800000.0			
Calculated Flow/Measured Flow	#DIV/0!	#DIV/0!	#DIV/0!	0.998	#DIV/0!	#DIV/0!	1.001	#DIV/0!	#DIV/0!	#DIV/0!
Reality Check from Areal Yield X Basin Area	174638.7	235450.8	335258.2	1444750.2	279386.8	208035.3	887509.1	0.0	0.0	0.0
Calculated Flow/Flow from Areal Yield	1.010	0.997	1.026	1.036	1.095	1.033	0.902	#DIV/0!	#DIV/0!	#DIV/0!

The resulting output volume for each basin is calculated in the table below, and two reality check opportunities are provided. First any actual data can be added for direct comparison; average flows are available for only two points, the inlets of the two tributaries, but these are useful. In many cases no flow data may be available. The model therefore generates an estimate of the expected average flow as a function of all contributing upstream watershed area and the water yield provided near the top of the Calculations sheet (covered previously). While this flow estimate is approximate, it should not vary from the modeled flow by more than about 20% unless there are unusual circumstances.

In the example, the ratio of the calculated flow from the complete model generation and routing to the estimated yield from the contributing drainage area ranges from 0.902 to 1.095, suggesting fairly close agreement. As some ratios are lower than 1 and others are higher than 1, no model-wide adjustment is likely to bring the values into closer agreement. Slight changes in attenuation for each basin could be applied, but are not necessary when the values agree this closely.

**Phosphorus**

The same approach applied to attenuation of water is applied to the phosphorus load, as shown in the table below. Here attenuation can range from 0 to 1.0, with the value shown representing the portion of the load that reaches the terminus of the basin. With natural or human enhanced removal processes, it is unusual for all of the load to pass through a basin, but it is also unusual for more than 60 to 70% of it to be removed. What value to pick depends on professional judgment regarding the nature of removal processes in each basin. Infiltration, filtration, detention and uptake will lower the attenuation value entered below, and knowledge of the literature on Best Management Practices is needed to make reliable judgments on attenuation values.

LOAD ROUTING AND ATTENUATION: PHOSPHORUS										
	BASIN 1	BASIN 2	BASIN 3	BASIN 4	BASIN 5	BASIN 6	BASIN 7	BASIN 8	BASIN 9	BASIN 10
	E. Direct (KG/YR)	W. Direct (KG/YR)	Upper T1 (KG/YR)	Lower T1 (KG/YR)	W. Upper T2 (KG/YR)	E. Upper T2 (KG/YR)	Lower T2 (KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)
BASIN 1 INDIVIDUAL	15.8	20.9	16.3	215.8	147.6	10.4	24.1	0.0	0.0	0.0
BASIN 1 OUTPUT	XXX	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
BASIN 2 OUTPUT	0.0	XXX	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
BASIN 3 OUTPUT	0.0	0.0	XXX	12.2	0.0	0.0	0.0	0.0	0.0	0.0
BASIN 4 OUTPUT	0.0	0.0	0.0	XXX	0.0	0.0	0.0	0.0	0.0	0.0
BASIN 5 OUTPUT	0.0	0.0	0.0	0.0	XXX	0.0	118.1	0.0	0.0	0.0
BASIN 6 OUTPUT	0.0	0.0	0.0	0.0	0.0	XXX	7.8	0.0	0.0	0.0
BASIN 7 OUTPUT	0.0	0.0	0.0	0.0	0.0	0.0	XXX	0.0	0.0	0.0
BASIN 8 OUTPUT	0.0	0.0	0.0	0.0	0.0	0.0	0.0	XXX	0.0	0.0
BASIN 9 OUTPUT	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	XXX	0.0
BASIN 10 OUTPUT	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	XXX
CUMULATIVE TOTAL	15.8	20.9	16.3	228.0	147.6	10.4	149.9	0.0	0.0	0.0
BASIN ATTENUATION	0.90	0.90	0.75	0.85	0.80	0.75	0.70	1.00	1.00	1.00
OUTPUT LOAD	14.2	18.8	12.2	193.8	118.1	7.8	104.9	0.0	0.0	0.0

In the example system, the direct drainage basins were assigned values of 0.90, representing a small amount of removal mainly by infiltration processes. Upper Tributary #1 has a small pond and was accorded a value of 0.75 (25% removal); a larger pond might have suggested a value closer to 0.5. Lower Tributary #1 has an assigned value of 0.85 based on channel processes that favor uptake and adsorption. West and East Upper Tributary #2 have value based on drainage basin features as evaluated in the field, while the wetland associated with Lower Tributary #2 garners it the lowest load pass-through at 0.7. A more extensive wetland with greater sheet flow might have earned a value near 0.5. Resulting output loads are then calculated.

**Nitrogen**

The same process used with water and TP attenuation applies to TN, but attenuation of TN is rarely identical to that for TP. Nitrogen moves more readily through soil, and while transformations occur in the stream, losses due to denitrification require slower flows and low oxygen levels not commonly encountered in steeper, rockier channels. However, losses from uptake and possibly denitrification are possible in wetland areas, such as that associated with Lower Tributary #2. Accordingly, attenuation values are assigned as shown in the table below, with generally lower losses for TN than for TP. As with TP attenuation, choosing appropriate values does require some professional judgment.

LOAD ROUTING AND ATTENUATION: NITROGEN										
	BASIN 1	BASIN 2	BASIN 3	BASIN 4	BASIN 5	BASIN 6	BASIN 7	BASIN 8	BASIN 9	BASIN 10
	E. Direct	W. Direct	Upper T1	Lower T1	W. Upper T2	E. Upper T2	Lower T2	(KG/YR)	(KG/YR)	(KG/YR)
	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)	(KG/YR)
BASIN 1 INDIVIDUAL	246.5	315.6	290.1	1863.3	1929.8	182.6	416.6	0.0	0.0	0.0
BASIN 1 OUTPUT	XXX	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
BASIN 2 OUTPUT	0.0	XXX	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0
BASIN 3 OUTPUT	0.0	0.0	XXX	232.1	0.0	0.0	0.0	0.0	0.0	0.0
BASIN 4 OUTPUT	0.0	0.0	0.0	XXX	0.0	0.0	0.0	0.0	0.0	0.0
BASIN 5 OUTPUT	0.0	0.0	0.0	0.0	XXX	0.0	1543.8	0.0	0.0	0.0
BASIN 6 OUTPUT	0.0	0.0	0.0	0.0	0.0	XXX	146.0	0.0	0.0	0.0
BASIN 7 OUTPUT	0.0	0.0	0.0	0.0	0.0	0.0	XXX	0.0	0.0	0.0
BASIN 8 OUTPUT	0.0	0.0	0.0	0.0	0.0	0.0	0.0	XXX	0.0	0.0
BASIN 9 OUTPUT	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	XXX	0.0
BASIN 10 OUTPUT	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	0.0	XXX
CUMULATIVE TOTAL	246.5	315.6	290.1	2095.4	1929.8	182.6	2106.4	0.0	0.0	0.0
BASIN ATTENUATION	0.95	0.95	0.80	0.90	0.80	0.80	0.75	1.00	1.00	1.00
OUTPUT LOAD	234.2	299.8	232.1	1885.8	1543.8	146.0	1579.8	0.0	0.0	0.0

**Load and Concentration Summary**

**Water**

Water loads were handled to the extent necessary in the previous loading calculations, and are used in this section only to allow calculation of expected TP and TN concentrations, facilitating reality checks with actual data.

**Phosphorus**

Using the calculated load of TP for each basin and the corresponding water volume, an average expected concentration can be derived, as shown in the table below. Where sampling provides actual data, values can be compared to determine how well the model represents known reality. Sufficient sampling is needed to make the reality check values reliable; it is not appropriate to assume that either the data or the model is necessarily accurate when the values disagree. However, with enough data to adequately characterize the concentrations observed in the stream, the model can be adjusted to produce a better match. Estimated and actual concentrations are used to generate a ratio for easy comparison.

The TP loads previously calculated represent the load passing through each basin, but do not represent what reaches the lake, as not all basins are terminal input sources. The model must be told which basins actually drain directly to the lake, and for which the exiting load is part of the total load to the lake.

LOAD AND CONCENTRATION SUMMARY: PHOSPHORUS											
	BASIN 1	BASIN 2	BASIN 3	BASIN 4	BASIN 5	BASIN 6	BASIN 7	BASIN 8	BASIN 9	BASIN 10	
	E. Direct	W. Direct	Upper T1	Lower T1	W. Upper T2	E. Upper T2	Lower T2				
OUTPUT (CU.M/YR)	176314	234714	344045	1496765	305820	214838	800671	0	0	0	
OUTPUT (KG/YR)	14.2	18.8	12.2	193.8	118.1	7.8	104.9	0.0	0.0	0.0	
OUTPUT (MG/L)	0.081	0.080	0.035	0.129	0.386	0.036	0.131	#DIV/0!	#DIV/0!	#DIV/0!	
REALITY CHECK CONC. (FROM DATA)	0.078	0.076	0.040	0.150	0.325	0.035	0.125				
CALCULATED CONC./MEASURED CONC.	1.035	1.056	0.886	0.863	1.188	1.038	1.049	#DIV/0!	#DIV/0!	#DIV/0!	
BASIN EXPORT COEFFICIENT	0.45	0.44	0.20	0.74	2.33	0.21	0.65	#DIV/0!	#DIV/0!	#DIV/0!	
TERMINAL DISCHARGE? (1=YES 2=NO)	1	1	0	1	0	0	1	1	1	1	
LOAD TO RESOURCE											
WATER (CU.M/YR)	176314	234714	0	1496765	0	0	800671	0	0	0	TOTAL
PHOSPHORUS (KG/YR)	14.2	18.8	0.0	193.8	0.0	0.0	104.9	0.0	0.0	0.0	2708464
PHOSPHORUS (MG/L)	0.081	0.080	0.000	0.129	0.000	0.000	0.131	#DIV/0!	#DIV/0!	#DIV/0!	0.123

For the example system, the ratio of the calculated concentration to average actual values derived from substantial sampling (typically on the order of 10 or more samples representing the range of dry to wet conditions) ranges from 0.886 to 1.188, or from 11% low to 19% high, within a generally acceptable range of  $\pm 20\%$ . This is not a strict threshold, especially with lower TP concentrations where detection limits and intervals of expression for methods can produce higher percent deviation with very small absolute differences. Yet in general,  $<20\%$  difference between observed and expected watershed basin output values is considered reasonable for a model at this level of sophistication.

That some values are higher than expected and others lower suggests that now model-wide adjustment will improve agreement (such as an export coefficient change), but attenuation values for individual basins could be adjusted if there is justification.

For the example system, Basins 1, 2, 4 and 7 contribute directly to the lake, and are so denoted by a 1 in their respective columns on the line for terminal discharge. These loads will be summed to derive a watershed load of TP to the lake.

### Nitrogen

The model process followed for TN is identical to that applied to TP loads from basins. For TN in the example system, comparison of expected vs. observed values yields a range of ratios from 0.929 to 1.188, representing 7% low to 19% high. Only one out of seven values is lower than 1, so perhaps some adjustment of the TN export coefficients is in order, but most individual basin values are within 8% of each other, so without clear justification, the judgment exercised in the original choices for export coefficients and attenuation is not generally overridden. The same basins denoted as terminal discharges for TP are so noted for TN, allowing calculation of the total watershed load of TN to the lake.

LOAD AND CONCENTRATION SUMMARY: NITROGEN											
	BASIN 1	BASIN 2	BASIN 3	BASIN 4	BASIN 5	BASIN 6	BASIN 7	BASIN 8	BASIN 9	BASIN 10	
	E. Direct	W. Direct	Upper T1	Lower T1	W. Upper T2	E. Upper T2	Lower T2				
OUTPUT (CU.M/YR)	176314	234714	344045	1496765	305820	214838	800671	0	0	0	
OUTPUT (KG/YR)	234.2	299.8	232.1	1885.8	1543.8	146.0	1579.8	0.0	0.0	0.0	
OUTPUT (MG/L)	1.328	1.277	0.675	1.260	5.048	0.680	1.973	#DIV/0!	#DIV/0!	#DIV/0!	
REALITY CHECK CONC. (FROM DATA)	1.430	1.240	0.650	1.180	4.250	0.650	1.830				
CALCULATED CONC./MEASURED CONC.	0.929	1.030	1.038	1.068	1.188	1.046	1.078	#DIV/0!	#DIV/0!	#DIV/0!	
BASIN EXPORT COEFFICIENT	7.41	7.03	3.82	7.21	30.52	3.88	9.83	#DIV/0!	#DIV/0!	#DIV/0!	
TERMINAL DISCHARGE? (1=YES 2=NO)	1	1	0	1	0	0	1	1	1	1	
LOAD TO RESOURCE											
WATER (CU.M/YR)	176314	234714	0	1496765	0	0	800671	0	0	0	TOTAL
NITROGEN (KG/YR)	234.2	299.8	0.0	1885.8	0.0	0.0	1579.8	0.0	0.0	0.0	3999.7
NITROGEN (MG/L)	1.328	1.277	0.000	1.260	0.000	0.000	1.973	#DIV/0!	#DIV/0!	#DIV/0!	1.477

### Grand Totals

The final portion of the Calculation sheet is a summary of all loads to the lake and a grand total load with associated concentrations for TP and TN, as shown below. The breakdown of sources is provided for later consideration in both overall target setting and in consideration of BMPs. For the

example system, the watershed load is clearly dominant, and would need to be addressed if substantial reductions in loading were considered necessary. The loads of water, TP and TN are then transferred automatically to the Prediction sheet to facilitate estimation of in-lake concentrations of TP, TN and Chl and a value for SDT. The derived overall input concentration for TP is also transferred; the in-lake predictive models for TN do not require that overall input concentration, but the comparison of TP and TN input levels can be insightful when considering what types of algae are likely to dominate the lake phytoplankton.

<b>LOAD SUMMARY</b>			
DIRECT LOADS TO LAKE	P (KG/YR)	N (KG/YR)	WATER (CU.M/YR)
ATMOSPHERIC	8.0	260.0	484000
INTERNAL	40.0	100.0	0
WATERFOWL	10.0	47.5	0
SEPTIC SYSTEM	31.8	517.0	31250
WATERSHED LOAD	331.7	3998.4	2707372
TOTAL LOAD TO LAKE	421.5	4922.9	3222622
(Watershed + direct loads)			
TOTAL INPUT CONC. (MG/L)	0.131	1.528	

#### **Water Quality Predictions**

Prediction of TP, TN, Chl and SDT is based on empirical equations from the literature, nearly all pertaining to North American systems. Only a few additional pieces of information are needed to run the model; most of the needed input data are automatically transferred from the Calculations sheet. As shown below, only the concentration of TP leaving the lake and the lake volume must be entered on the Prediction sheet. If the outflow TP level is not known, the in-lake surface concentration is normally used. If the volume is not specifically known, an average depth can be multiplied by the lake area to derive an input volume, which will then recalculate the average depth one cell below. The nature of the TN prediction models does not require any TN concentration input.

<b>IN-LAKE MODELS FOR PREDICTING CONCENTRATIONS: Current Conditions</b>				
<b>THE TERMS</b>				
<b>PHOSPHORUS</b>				
<b>SYMBOL</b>	<b>PARAMETER</b>	<b>UNITS</b>	<b>DERIVATION</b>	<b>VALUE</b>
TP	Lake Total Phosphorus Conc.	ppb	From in-lake models	To Be Predicted
KG	Phosphorus Load to Lake	kg/yr	From export model	422
L	Phosphorus Load to Lake	g P/m <sup>2</sup> /yr	KG*1000/A	1.054
TPin	Influent (Inflow) Total Phosphorus	ppb	From export model	131
TPout	Effluent (Outlet) Total Phosphorus	ppb	From data, if available	75 <i>Enter Value (TP out)</i>
I	Inflow	m <sup>3</sup> /yr	From export model	3222622
A	Lake Area	m <sup>2</sup>	From data	400000
V	Lake Volume	m <sup>3</sup>	From data	1625300 <i>Enter Value (V)</i>
Z	Mean Depth	m	Volume/area	4.063
F	Flushing Rate	flushings/yr	Inflow/volume	1.983
S	Suspended Fraction	no units	Effluent TP/Influent TP	0.573
Qs	Areal Water Load	m/yr	Z(F)	8.057
Vs	Settling Velocity	m	Z(S)	2.330
Rp	Retention Coefficient (settling rate)	no units	$((Vs+13.2)/2)/(((Vs+13.2)/2)+Qs)$	0.491
Rlm	Retention Coefficient (flushing rate)	no units	$1/(1+F^{0.5})$	0.415
<b>NITROGEN</b>				
<b>SYMBOL</b>	<b>PARAMETER</b>	<b>UNITS</b>	<b>DERIVATION</b>	<b>VALUE</b>
TN	Lake Total Nitrogen Conc.	ppb	From in-lake models	To Be Predicted
KG	Nitrogen Load to Lake	kg/yr	From export model	4923
L1	Nitrogen Load to Lake	g N/m <sup>2</sup> /yr	KG*1000/A	12.31
L2	Nitrogen Load to Lake	mg N/m <sup>2</sup> /yr	KG*1000000/A	12307
C1	Coefficient of Attenuation, from F	fraction/yr	$2.7183^{(0.5541(\ln(F))-0.367)}$	1.01
C2	Coefficient of Attenuation, from L	fraction/yr	$2.7183^{(0.71(\ln(L2))-6.426)}$	1.30
C3	Coefficient of Attenuation, from L/Z	fraction/yr	$2.7183^{(0.594(\ln(L2/Z))-4.144)}$	1.85

**Phosphorus Concentration**

TP concentration is predicted from the equations shown below. The mass balance calculation is simply the TP load divided by the water load, and assumes no losses to settling within the lake. Virtually all lakes have settling losses, but the other equations derive that settling coefficient in different ways, providing a range of possible TP concentration values. Where there is knowledge of the components of the settling calculations, a model might be selected as most representative or models might be eliminated as inapplicable, but otherwise the average of the five empirical models (excluding the mass balance calculation) is accepted as the predicted TP value for the lake.

<b>THE MODELS</b>		<b>PRED.</b>	<b>PERMIS.</b>	<b>CRITICAL</b>
		<b>CONC.</b>	<b>CONC.</b>	<b>CONC.</b>
<b>NAME</b>	<b>FORMULA</b>	<b>(ppb)</b>	<b>(ppb)</b>	<b>(ppb)</b>
Mass Balance (Maximum Conc.)	$TP=L/(Z(F))*1000$	131		
Kirchner-Dillon 1975 (K-D)	$TP=L(1-Rp)/(Z(F))*1000$	67	18	36
Vollenweider 1975 (V)	$TP=L/(Z(S+F))*1000$	101	27	55
Larsen-Mercier 1976 (L-M)	$TP=L(1-Rlm)/(Z(F))*1000$	76	21	41
Jones-Bachmann 1976 (J-B)	$TP=0.84(L)/(Z(0.65+F))*1000$	83	22	45
Reckhow General (1977) (Rg)	$TP=L/(11.6+1.2(Z(F)))*1000$	50	13	27
Average of Model Values (without mass balance)		75	20	41
Measured Value (mean, median, other)		75		
From Vollenweider 1968				
Permissible Load (g/m2/yr)	$Lp=10^{(0.501503(\log(Z(F)))-1.0018)}$	0.28		
Critical Load (g/m2/yr)	$Lc=2(Cp)$	0.57		

The predicted in-lake TP concentration can be compared to actual data (an average value is entered in the shaded cell as a reality check) and to calculation of the permissible and critical concentrations as derived from Vollenweider's 1968 work. For the example lake, the predicted TP level of 75 ug/L is an exact match for the measured value of 75 ug/L, but both are well above the critical concentration.

The permissible concentration is the value above which algal blooms are to be expected on a potentially unacceptable frequency, while the critical concentration is the level above which unacceptable algal growths are to be expected, barring extreme flushing, toxic events, or light limitation from suspended sediment.

Use of the range of values derived from these empirical equations provides some sense for the uncertainty in the analysis. Changing input loads, lake volume, or other key variables allows for sensitivity analysis.

### **Nitrogen Concentration**

Prediction of TN is based on three separate empirical equations from the same work, each calculating settling losses differently. A mass balance equation is applied as well, as with the prediction of TP. An actual mean value is normally entered in the shaded cell as a reality check. For the example system, the actual mean TN value is within the range of predicted values, but is about 5.6% lower than the average of predicted values. One might consider adjusting export coefficients or attenuation rates in the Calculations sheet, to bring these values closer together, but the discrepancy is relatively minor.



<b>NITROGEN</b>		
Mass Balance (Maximum Conc.)	$TN=L/(Z(F))*1000$	1528
Bachmann 1980	$TN=L/(Z(C1+F))*1000$	1011
Bachmann 1980	$TN=L/(Z(C2+F))*1000$	923
Bachmann 1980	$TN=L/(Z(C3+F))*1000$	789
Average of Model Values (without mass balance)		908
Measured Value (mean, median, other)		860

### Chlorophyll Concentration, Water Clarity and Bloom Probability

Once an average in-lake TP concentration has been established, the Predictions sheet derives corresponding Chl and SDT values, as shown below. Five different equations are used to derive a predicted Chl value, and an average is derived. Peak Chl is estimated with three equations, with an average generated. Average and maximum expected SDT are estimated as well. Bloom frequency is based on the relationship of mean Chl to other threshold levels from other studies, and the portion of time that Chl is expected to exceed 10, 15, 20, 30 and 40 ug/L is derived.

A set of shaded cells are provided for entry of known measured values for comparison. For the example lake, the average and peak Chl levels predicted from the model are slightly higher than actual measured values, while the average and maximum SDT from the model are slightly lower than observed values, consistent with the Chl results. Agreement is generally high, however, with differences between 10 and 20%. There were not enough data to construct a dependable actual distribution of Chl over the range of thresholds provided for the example lake.

There are other factors besides nutrients that can strongly affect the standing crop of algae and resulting Chl levels, including low light from suspended sediment, grazing by zooplankton, presence of heterotrophic algae, and flushing effects from high flows. Consequently, close agreement between predicted and actual Chl will be harder to achieve than for predicted and actual TP. Knowledge of those other potentially important influences can help determine if model calibration is off, or if closer agreement is not rationally achievable.

<b>PREDICTED CHL AND WATER CLARITY</b>			
<b>MODEL</b>	<b>Value</b>	<b>Mean</b>	<b>Measured</b>
<b>Mean Chlorophyll (ug/L)</b>			
Carlson 1977	45.9		
Dillon and Rigler 1974	38.4		
Jones and Bachmann 1976	44.7		
Oglesby and Schaffner 1978	40.4		
Modified Vollenweider 1982	35.5	41.0	37.5
<b>Peak Chlorophyll (ug/L)</b>			
Modified Vollenweider (TP) 1982	119.7		
Vollenweider (CHL) 1982	133.1		
Modified Jones, Rast and Lee 1979	139.5	130.8	118.1
<b>Secchi Transparency (M)</b>			
Oglesby and Schaffner 1978 (Avg)	0.8		1.0
Modified Vollenweider 1982 (Max)	2.9		3.1
<b>Bloom Probability</b>			
Probability of Chl >10 ug/L (% of time)	99.5%		
Probability of Chl >15 ug/L (% of time)	96.1%		
Probability of Chl >20 ug/L (% of time)	88.2%		
Probability of Chl >30 ug/L (% of time)	64.6%		
Probability of Chl >40 ug/L (% of time)	42.0%		

### Evaluating Initial Results

LLRM is not meant to be a “black box” model. One can look at any cell and discern which steps are most important to final results in any give case. Several quality control processes are recommended in each application.

### Checking Values

Many numerical entries must be made to run LLRM. Be sure to double check the values entered. Simple entry errors can cause major discrepancies between predictions and reality. Where an export coefficient is large, most notably with Agric4, feedlot area, it is essential that the land use actually associated with that activity be accurately assessed and entered.

### Following Loads

For any individually identified load that represents a substantial portion of the total load (certainly >25%, perhaps as small a portion as 10%), it is appropriate to follow that load from generation through delivery to the lake, observing the losses and transformations along the way. Sometimes the path will be very short, and sometimes there may be multiple points where attenuation is applied. Consider dry vs. wet weather inputs and determine if the ratio is reasonable in light of actual data or field observations. Are calculated concentrations at points of measurement consistent with the actual measurements? Are watershed processes being adequately represented? One limitation of the model involves application of attenuation for all loads within a defined basin; loads may enter at the distal or proximal ends of the basin, and attenuation may not apply equally to all sources. Where loading and attenuation are not being properly represented, consider subdividing the basin to work with drainages of the most meaningful sizes.

### Reality Checks

LLRM can be run with minimal actual water quality data, but to gain confidence in the predictions it is necessary to compare results with sufficient amounts of actual data for key points in the modeled system. Ideally, water quality will be tested at all identified nodes, including the output points for all basins, any point source discharges, any direct discharge pipes to the lake, and in the lake itself. Wet and dry weather sampling should be conducted. Flow values are highly desirable, but without a longer term record, considerable uncertainty will remain; variability in flow is often extreme, necessitating large data sets to get representative statistical representation. Where there are multiple measurement points, compare not just

how close predicted values are to observed values, but the pattern. Are observed values consistently over- or underpredicted? A rough threshold of  $\pm 20\%$  is recommended as a starting point, with a mix of values in the + or – categories.

**Sensitivity Testing**

The sensitivity of LLRM can be evaluated by altering individual features and observing the effect on results. For any variable for which the value is rather uncertain, enter the maximum value conceivable, and record model results. Then repeat the process with the minimum plausible value, and compare to ascertain how much variation can be induced by error in that variable. Which variables seem to have the greatest impact on results? Those variables should receive the most attention in reality checking, ground truthing, and future monitoring, and would also be the most likely candidates for adjustment in model calibration, unless the initially entered values are very certain.

For example, the runoff coefficients for TP from the various land uses were set below the median literature values, based on knowledge of loads for some drainage areas from actual data for flow and concentration. However, it is possible that the actual load generated from various land uses is higher than initially assumed, and it is the attenuation that should be adjusted to achieve a predicted in-lake concentration that matches actual data. If the median TP export for runoff is entered into the Calculations sheet, substituting the unshaded values for the shaded values in the table below, the resulting in-lake TP prediction is 89 ug/L, much higher than the 75 ug/L from real data.

	Original	New
	P Export	P Export
	Coefficient	Coefficient
LAND USE	(kg/ha/yr)	(kg/ha/yr)
Urban 1 (Residential)	0.65	1.10
Urban 2 (Roads)	0.75	1.10
Urban 3 (Mixed Urban/Commercial)	0.80	1.10
Urban 4 (Industrial)	0.70	1.10
Urban 5 (Parks, Recreation Fields, Institutional)	0.80	1.10
Agric 1 (Cover Crop)	0.80	0.80
Agric 2 (Row Crop)	1.00	2.20
Agric 3 (Grazing)	0.40	0.80
Agric 4 (Feedlot)	224.00	224.00
Forest 1 (Upland)	0.20	0.20
Forest 2 (Wetland)	0.10	0.20
Open 1 (Wetland/Lake)	0.10	0.20
Open 2 (Meadow)	0.10	0.20
Open 3 (Excavation)	0.80	0.80
Other 1	0.20	0.20
Other 2	1.10	1.10
Other 3	2.20	2.20

To get a closer match for the known in-lake value, attenuation would have to be adjusted (reduction in the portion of the generated load that reaches the lake) by about 0.1 units (10%), as shown below. This would result in a predicted in-lake TP concentration of 77 ug/L, not far above the measured 75 ug/L. It is apparent that choice of export coefficients is fairly important, but that error in those choices can be compensated by adjustments in attenuation that are not too extreme to be believed. Yet those choices will affect the results of management scenario testing, and should be made carefully. The intent is to properly represent watershed processes, both loading and attenuation, not just the product of the two.

	BASIN 1	BASIN 2	BASIN 3	BASIN 4	BASIN 5	BASIN 6	BASIN 7
	E. Direct	W. Direct	Upper T1	Lower T1	W. Upper T2	E. Upper T2	Lower T2
ORIGINAL BASIN ATTENUATION	0.90	0.90	0.75	0.85	0.80	0.75	0.70
NEW BASIN ATTENUATION	0.80	0.80	0.65	0.75	0.70	0.65	0.60

Aside from changes in all export coefficients, one might consider the impact of changing a single value. As that value applies to all areas given for the corresponding land use, its impact will be proportional to the magnitude of that area relative to other land uses. A change in forested land use exports may be very influential if most of the watershed is forested. A much larger change would be necessary to cause similar impact for a land use that represents a small portion of the watershed.

### Model Calibration

Actual adjustment of LLRM to get predicted results in reasonable agreement with actual data can be achieved by altering any of the input data. The key to proper calibration is to change values that have some uncertainty, and to change them in a way that makes sense in light of knowledge of the target watershed and lake. One would not change entered land use areas believed to be correct just to get the predictions to match actual data. Rather, one would adjust the export coefficients for land uses within the plausible range (see Reference Variables sheet), and in accordance with values that could be derived for selected drainage areas (within the target system or nearby) from actual data. Or one could adjust attenuation, determining that a detention area, wetland, or other landscape feature had somewhat greater or lesser attenuation capacity that initially estimated. Justification for all changes should be provided; model adjustment should be transparent and amenable to scrutiny.

For the example system, it may be appropriate to adjust either TN export coefficients or attenuation to get the average of the three empirical equation results for TN (see Predictions sheet) to match the observed average more closely. In the example, a predicted TN concentration of 908 ug/L was derived, while the average of quite a few in-lake samples was 860 ug/L. With a difference of <6%, this is not a major issue, but since all but one of the individual basin predictions for TN concentration were also overpredictions, adjustment can be justified.

If all the TN export coefficients in the Calculations sheet are reduced by 10%, an entirely plausible situation, the new TN prediction for the lake becomes 861 ug/L, a very close match for the observed 860 ug/L. Export coefficients were not changed selectively by land use; all were simply adjusted down a small amount, well within the range of possible variation in this system. Alternatively, if the TN attenuation coefficient for each basin is reduced in the Calculations sheet by 0.05 (representing 5% more loss of TN on the way to the lake), the new predicted in-lake TN concentration becomes 842 ug/L, not far below the observed 860 ug/L. Attenuation in each basin was adjusted the same way, showing no bias. Either of these adjustments (export coefficients or attenuation values) would be reasonable within the constraints of the model and knowledge of the system.

The only way to change the export coefficient for land use in a single basin is to split off that land use into one of the "Other" categories and have it appear in only the basins where a different export coefficient is justified. This is hardly ever done, and justification should involve supporting data. Likewise, if one basin had a particularly large load and a feature that might affect that load, one might justify changing the attenuation for just that one basin, but justification should be strong to interject this level of individual basin bias.

### Model Verification

Proper verification of models involves calibration with one set of data, followed by running the model with different input data leading to different results, with data to verify that those results are appropriate. Where data exist for conditions in a different time period that led to different in-lake conditions, such verification is possible with LLRM, but such opportunities tend to be rare. If the lake level was raised by dam modification, and in-lake data are available for before and after the pool rise, a simple change in the lake volume (entered in the Predictions sheet) can simulate this and allow verification. If in-lake data exist from a time before there was much development in the watershed, this could also allow verification by changing the land use and comparing

results to historic TP and TN levels in the lake. However, small changes in watershed land use are not likely to yield sufficiently large changes in in-lake conditions to be detectable with this model. Additionally, as LLRM is a steady state model, testing conditions in one year with wetter conditions against another year with drier conditions, with no change in land use, is really not a valid approach.

Model verification is a function of data availability for at least two periods of multiple years in duration with different conditions that can be represented by the model. Where available, use of these data to verify model performance is strongly advised. If predictions under the second set of conditions do not reasonably match the available data, adjustments in export coefficients, attenuation, or other features of the model may be needed. Understanding why conditions are not being properly represented is an important aspect of modeling, even when it is not possible to bring the model into complete agreement with available data.

**Scenario Testing**

LLRM is meant to be useful for evaluating possible consequences of land use conversions, changes in discharges, various management options, and related alterations of the watershed or lake. The primary purpose of this model is to allow the user to project possible consequences of actions and aid management and policy decision processes. Testing a conceived scenario involves changing appropriate input data and observing the results. Common scenario testing includes determining the likely “original” or “pre-settlement” condition of the lake, termed “Background Condition” here, and forecasting the benefit from possible Best Management Practices (BMPs).

**Background Conditions**

Simulation of Background Conditions is most often accomplished by changing all developed land uses to forest, wetland or water, whichever is most appropriate based on old land use maps or other sources of knowledge about watershed features prior to development of roads, towns, industry, and related human features. Default export coefficients for undeveloped land use types are virtually the same, so the distinction is not critical if records are sparse.

For the example system, all developed land uses were converted to forested upland, although it is entirely possible that some wetlands were filled for development before regulations to protect wetlands were promulgated, and some may even have been filled more recently. The resulting land use table, shown below, replaces that in the original model representing current conditions. The watershed area is the same, although in some cases diversions may change this aspect as well. Many lakes have been created by human action, such that setting all land uses to an undeveloped state would correspond to not having a lake present, but the assumption applied here is that the user is interested in the condition of the lake as it currently exists, but in the absence of human influences.

**BASIN AREAS**

LAND USE	BASIN 1 E. Direct AREA (HA)	BASIN 2 W. Direct AREA (HA)	BASIN 3 Upper T1 AREA (HA)	BASIN 4 Lower T1 AREA (HA)	BASIN 5 W. Upper T2 AREA (HA)	BASIN 6 E. Upper T2 AREA (HA)	BASIN 7 Lower T2 AREA (HA)	BASIN 8 AREA (HA)	BASIN 9 AREA (HA)	BASIN 10 AREA (HA)	TOTAL AREA (HA)
Urban 1 (Residential)											0.0
Urban 2 (Roads)											0.0
Urban 3 (Mixed Urban/Commercial)											0.0
Urban 4 (Industrial)											0.0
Urban 5 (Parks, Recreation Fields, Institutional)											0.0
Agric 1 (Cover Crop)											0.0
Agric 2 (Row Crop)											0.0
Agric 3 (Grazing)											0.0
Agric 4 (Feedlot)											0.0
Forest 1 (Upland)	27.1	40.6	60.7	176.0	50.5	37.6	56.2				448.7
Forest 2 (Wetland)	0.0	0.2	0.0	14.5	0.0	0.0	1.9				16.6
Open 1 (Wetland/Lake)	2.5	0.6	0.0	0.1	0.0	0.1	14.2				17.5
Open 2 (Meadow)	2.0	1.3	0.0	10.2	0.1	0.0	0.2				13.8
Open 3 (Excavation)											0.0
Other 1											0.0
Other 2											0.0
Other 3											0.0
<b>TOTAL</b>	<b>31.6</b>	<b>42.7</b>	<b>60.7</b>	<b>200.8</b>	<b>50.6</b>	<b>37.7</b>	<b>72.5</b>	<b>0</b>	<b>0</b>		<b>496.6</b>

Also altered in this example, but not shown explicitly here, are the internal load (reduced to typical background levels of 0.5 mg TP/m<sup>2</sup>/d and 2.0 mg TN/m<sup>2</sup>/d), point source (removed), septic system inputs (removed), and attenuation of TP and TN (values in cells lowered by 10%, representing lesser transport to the lake through the natural landscape).

Resulting in-lake conditions, as indicated in the column of the table below labeled “Background Conditions,” include a TP concentration of 16 ug/L and a TN level of 366 ug/L. Average Chl is predicted at 5.7 ug/L, leading to a mean SDT of 2.7 m. Bloom frequency is expected to be 8.6% for Chl >10 ug/L and 1.5% for Chl >15 ug/L, with values >20 ug/L very rare. While the example lake appears to have never had extremely high water clarity, it was probably much more attractive and useable than it is now, based on comparison with current conditions in the table. If this lake was in an ecoregion with a target TP level of <16 ug/L, it is expected that meeting that limit would be very difficult, given apparent natural influences.

SUMMARY TABLE FOR SCENARIO TESTING	Existing Conditions		Background Conditions	Complete Build-out	WWTF Enhanced	Feasible BMPs
	Calibrated Model Value	Actual Data	Model Value	Model Value	Model Value	Model Value
Phosphorus (ppb)	75	75	16	83	49	24
Nitrogen (ppb)	861	860	366	965	745	540
Mean Chlorophyll (ug/L)	40.7	37.5	5.7	46.7	23.3	9.3
Peak Chlorophyll (ug/L)	130.0	118.1	20.1	148.5	76.1	31.6
Mean Secchi (m)	0.8	1.0	2.7	0.8	1.2	2.0
Peak Secchi (m)	2.9	3.1	4.5	2.8	3.3	4.0
Bloom Probability						
Probability of Chl >10 ug/L	99.5%		8.6%	99.8%	92.6%	34.4%
Probability of Chl >15 ug/L	96.0%		1.5%	97.8%	73.6%	11.3%
Probability of Chl >20 ug/L	87.9%		0.3%	92.6%	52.3%	3.7%
Probability of Chl >30 ug/L	64.1%		0.0%	73.8%	22.5%	0.5%
Probability of Chl >40 ug/L	41.5%		0.0%	52.5%	9.2%	0.1%

### Changes in Land Use

Another common scenario to be tested involves changes in land use. How much worse might conditions become if all buildable land became developed? For the example system, with current zoning and protection of some undeveloped areas, a substantial fraction of currently forested areas could still become low density residential housing. Adjusting the land uses in the corresponding input table to reflect a conversion of forest to low density urban development, as shown below, and adding 28 septic systems to that portion of the loading analysis (not shown here) an increase in TP, TN and Chl is derived, and a decrease in SDT are observed (see summary table above). TP rises to 83 ug/L and TN to 965 ug/L, but the change in Chl and SDT are not large, as the lake would already be hypereutrophic.

**BASIN AREAS**

	BASIN 1 E. Direct AREA (HA)	BASIN 2 W. Direct AREA (HA)	BASIN 3 Upper T1 AREA (HA)	BASIN 4 Lower T1 AREA (HA)	BASIN 5 W. Upper T2 AREA (HA)	BASIN 6 E. Upper T2 AREA (HA)	BASIN 7 Lower T2 AREA (HA)	BASIN 8 AREA (HA)	BASIN 9 AREA (HA)	BASIN 10 AREA (HA)	TOTAL AREA (HA)
<b>LAND USE</b>											
Urban 1 (Residential)	16.0	18.5	23.4	87.4	6.7	12.5	38.6				203.1
Original Urban 1	12.0	8.5	8.4	47.4	6.7	4.5	18.1				
Urban 2 (Roads)	3.7	5.5	0.0	5.9	0.8	0.6	2.3				18.8
Urban 3 (Mixed Urban/Commercial)	3.6	5.8	0.0	5.9	0.8	0.6	2.3				19.0
Urban 4 (Industrial)	0.0	0.0	0.0	23.5	0.0	0.0	0.0				23.5
Urban 5 (Parks, Recreation Fields, Institutional)	0.0	3.2	0.0	0.0	0.0	0.0	0.0				3.2
Agric 1 (Cover Crop)	0.0	0.0	0.0	0.8	12.3	0.0	0.0				13.1
Agric 2 (Row Crop)	0.0	0.0	0.0	0.0	16.2	0.0	0.0				16.2
Agric 3 (Grazing)	0.0	0.0	0.0	0.0	4.0	0.0	0.0				4.0
Agric 4 (Feedlot)	0.0	0.0	0.0	0.0	0.5	0.0	0.0				0.5
Forest 1 (Upland)	3.7	7.5	35.3	50.3	9.2	24.0	13.0				143.0
Original Forest 1	7.7	17.5	50.3	90.3	9.2	32.0	33.6				240.6
Forest 2 (Wetland)	0.0	0.2	0.0	14.5	0.0	0.0	1.9				16.6
Open 1 (Wetland/Lake)	2.5	0.6	2.0	0.1	0.0	0.1	14.2				19.5
Open 2 (Meadow)	2.0	1.3	0.0	10.2	0.1	0.0	0.2				13.8
Open 3 (Excavation)	0.1	0.1	0.0	2.3	0.0	0.0	0.0				2.5
Other 1											0.0
Other 2											0.0
Other 3											0.0
<b>TOTAL</b>	<b>31.6</b>	<b>42.7</b>	<b>60.7</b>	<b>200.9</b>	<b>50.6</b>	<b>37.8</b>	<b>72.5</b>				<b>496.8</b>

**Changes in Wastewater Management**

Managing wastewater is often a need in lake communities. In LLRM, wastewater treatment facilities (WWTF) are represented as point sources, with flow and concentration provided. On-site wastewater disposal (septic) systems are part of the baseflow of drainage areas with tributaries, and can be represented that way for direct drainage areas as well, but the option exists to account separately for septic systems in the direct drainage area. Changes to point sources or septic systems can be made in LLRM to simulate possible management actions.

In the example system, there is one small WWTF that discharges into Lower Tributary #1 and 250 residential units that contribute to septic system inputs in the two defined direct drainage areas (see Figure 1). If the units now served by septic systems were tied into the WWTF via a pumping station, the flow through the WWTF would increase from 45,000 cu.m/yr under current conditions to 71,953 cu.m/yr, the amount of wastewater calculated to be generated by those 250 residential units. If WWTF effluent limits for TP and TN were established at 0.1 and 3.0 mg/L, respectively, the concentration in the discharge would be reduced from 3.0 and 12.0 mg/L (current values from monitoring) to the new effluent limits. The result would be a higher flow from the WWTF with lower TP and TN levels, and an elimination of septic system inputs in the model, both simple changes to make, as shown in the table below.

<b>NON-AREAL SOURCES</b>												
	Number of Source Units	Volume (cu.m/yr)	P Load/Unit (kg/unit/yr)	N Load/Unit (kg/unit/yr)	P Conc. (ppm)	N Conc. (ppm)	P Load (kg/yr)	N Load (kg/yr)				
Waterfowl	50		0.20	0.95			10	47.5				
<b>Point Sources</b>												
PS-1		71953			0.10	3.00	7.2	215.9				
PS-2					3.00	12.00	0	0				
PS-3					3.00	12.00	0	0				
Basin in which Point Source occurs (0=NO 1=YES)												
	BASIN 1	BASIN 2	BASIN 3	BASIN 4	BASIN 5	BASIN 6	BASIN 7	BASIN 8	BASIN 9	BASIN 10		
PS-1	0	0	0	1	0	0	0	0	0	0		
PS-2	0	0	0	0	0	0	0	0	0	0		
PS-3	0	0	0	0	0	0	0	0	0	0		
<b>DIRECT SEPTIC SYSTEM LOAD</b>												
Septic System Grouping (by occupancy or location)	Days of Occupancy/Year	Distance from Lake (ft)	Number of Dwellings	Number of People per Dwelling	Water per Person per Day (cu.m)	P Conc. (ppm)	N Conc. (ppm)	P Attenuation Factor	N Attenuation Factor	Water Load (cu.m/yr)	P Load (kg/yr)	N Load (kg/yr)
Group 1 Septic Systems	365	<100	0	2.5	0.25	8	20	0.2	0.9	0	0.0	0.0
Group 2 Septic Systems	365	100 - 300	0	2.5	0.25	8	20	0.1	0.8	0	0.0	0.0
Group 3 Septic Systems	90	<100	0	2.5	0.25	8	20	0.2	0.9	0	0.0	0.0
Group 4 Septic Systems	90	100 - 300	0	2.5	0.25	8	20	0.1	0.8	0	0.0	0.0
<b>Total Septic System Loading</b>										0	0.0	0.0

The result, shown in the summary table for scenario testing above, is an in-lake TP concentration of 49 ug/L and a new TN level of 745 ug/L. These are both substantial reductions from the current levels, but continued elevated Chl (mean = 23.3 ug/L, peak = 76.1 ug/L) and a high probability of algal blooms is



expected. Water clarity improves slightly (from 0.8 to 1.2 m on average), but at the cost of the sewerage and treatment, this is unlikely to produce a success story.

### **Best Management Practices**

The application of BMPs is generally regarded as the backbone of non-point source pollution management in watershed programs. Considerable effort has been devoted to assessing the percent removal for various pollutants that can be attained and sustained by various BMPs. BMPs tend to fall into one of two categories: source controls and pollutant trapping. Source controls limit the generation of TP and TN and include actions like bans on lawn fertilizers containing TP or requirements for post-development infiltration to equal pre-development conditions, and would be most likely addressed in LLRM by a change in export coefficient. Pollutant trapping limits the delivery of generated loads to the lake and includes such methods as detention, infiltration, and buffer strips, and is most often addressed in LLRM by changes in attenuation values.

There are limits on what individual BMPs can accomplish. While some site specific knowledge and sizing considerations help modify general guidelines, the following table provides a sense for the level of removal achievable with common BMPs.

**Range and Median for Expected Removal (%) for Key Pollutants by Selected Management Methods, Compiled from Literature Sources for Actual Projects and Best Professional Judgment Upon Data Review.**

	TSS	Total P	Soluble P	Total N	Soluble N	Metals
Street sweeping	5-20	5-20	<5	5-20	<5	5-20
Catch basin cleaning	5-10	<10	<1	<10	<1	5-10
Buffer strips	40-95 (50)	20-90 (30)	10-80 (20)	20-60 (30)	0-20 (5)	20-60 (30)
Conventional catch basins (Some sump capacity)	1-20 (5)	0-10 (2)	0-1 (0)	0-10 (2)	0-1 (0)	1-20 (5)
Modified catch basins (deep sumps and hoods)	25 (25)	0-20 (5)	0-1 (0)	0-20 (5)	0-1 (0)	20 (20)
Advanced catch basins (sediment/floatables traps)	25-90 (50)	0-19 (10)	0-21 (0)	0-20 (10)	0-6 (0)	10-30 (20)
Porous Pavement	40-80 (60)	28-85 (52)	0-25 (10)	40-95 (62)	-10-5 (0)	40-90 (60)
Vegetated swale	60-90 (70)	0-63 (30)	5-71 (35)	0-40 (25)	-25-31 (0)	50-90 (70)
Infiltration trench/chamber	75-90 (80)	40-70 (60)	20-60 (50)	40-80 (60)	0-40 (10)	50-90 (80)
Infiltration basin	75-80 (80)	40-100 (65)	25-100 (55)	35-80 (51)	0-82 (15)	50-90 (80)
Sand filtration system	80-85 (80)	38-85 (62)	35-90 (60)	22-73 (52)	-20-45 (13)	50-70 (60)
Organic filtration system	80-90 (80)	21-95 (58)	-17-40 (22)	19-55 (35)	-87-0 (-50)	60-90 (70)
Dry detention basin	14-87 (70)	23-99 (65)	5-76 (40)	29-65 (46)	-20-10 (0)	0-66 (36)
Wet detention basin	32-99 (70)	13-56 (27)	-20-5 (-5)	10-60 (31)	0-52 (10)	13-96 (63)
Constructed wetland	14-98 (70)	12-91 (49)	8-90 (63)	6-85 (34)	0-97 (43)	0-82 (54)
Pond/Wetland Combination	20-96 (76)	0-97 (55)	0-65 (30)	23-60 (39)	1-95 (49)	6-90 (58)
Chemical treatment	30-90 (70)	24-92 (63)	1-80 (42)	0-83 (38)	9-70 (34)	30-90 (65)

While BMPs in series can improve removal, the result is rarely multiplicative; that is, application of two BMPs expected to remove 50% of TP are unlikely to result in  $0.5 \times 0.5 = 0.25$  of the load remaining (75% removal) unless each BMP operates on a different fraction of TP (particulates vs. soluble, for example). This is where judgment and experience become critical to the modeling process. In general, BMPs rarely remove more than 2/3 of the load of P or N, and on average can be expected to remove around 50% of the P and 40% of the N unless very carefully designed, built and maintained. The luxury of space is not often affordable, forcing creativity or greater expense to achieve higher removal rates.

In the example system, setting attenuation for all basins to 0.5 for P and 0.6 for N is viewed as a practical level of BMP application for a first cut at what BMPs might be able to do for the lake. Careful consideration of which BMPs will be applied where in which basins is in order in the final analysis, but to set a

reasonable approximation of what can be achieved, these are supportable attenuation values. Note that values are not set at 0.5 or 0.6 of the value in place in the calibrated model, but rather a low end of 0.5 or 0.6. If, as with Basin 7 (Lower Tributary #2) in the example system, the attenuation values for P and N under current conditions are 0.70 and 0.75, the practical BMP values of 0.5 and 0.6, respectively, represent less of a decline through BMPs than for the direct drainage areas, which have current condition attenuation values of 0.9 for P and 0.95 for N.

In addition to setting P attenuation at 0.5 for P in all basins and 0.6 for N in all basins in the example system, the WWTF has been routed to a regional WWTF out of the watershed, and the all areas within 300 ft of the lake have been sewered, with that waste also going to the regional WWTF. Consequently, the WWTF and direct drainage septic system inputs have been eliminated. Finally, internal loading has been reduced to 0.5 mg P/m/day and 2.0 mg N/m<sup>2</sup>/day, achievable with nutrient inactivation and lowered inputs over time.

The results, as indicated in the summary table for scenario testing above, include an in-lake P concentration of 24 ug/L and an N level of 540 ug/L. The predicted mean Chl is 9.3 ug/L, with a peak of 31.6 ug/L. SDT would be expected to average 2.0 m and have a maximum of 4.0 m. While much improved over current conditions, these are marginal values for supporting the range of lake uses, particularly contact recreation and potable water supply. As a first cut assessment of what BMPs might do for the system, it suggests that more extreme measures will be needed, or that in-lake maintenance should be planned as well, since algal blooms would still be expected. Further scenario testing with the model, combined with cost estimation for potential BMPs, may shed light on the cost effectiveness of rehabilitating the example lake.

## **Appendix C:**

### **Land Use Categories, Export Coefficients, and Additional Calculations**

**Table C-1. Runoff and baseflow fraction ranges.**

	Low	Med	High
Baseflow fraction	0.10	0.40	0.95
Runoff fraction	0.01	0.20	0.40

**Table C-2. Runoff and baseflow fractions used in the model for Pawtuckaway Lake.**

<b>Landuse Category</b>	<b>Runoff Fraction</b>	<b>Baseflow Fraction</b>
Urban 1 (Residential)	0.40	0.25
Urban 2 (Mixed Urban/Commercial)	0.50	0.15
Urban 3 (Roads)	0.60	0.05
Urban 4 (Industrial)	0.60	0.05
Urban 5 (Parks, Recreation Fields, Institutional)	0.30	0.30
Agric 1 (Cover Crop)	0.15	0.30
Agric 2 (Row Crop)	0.30	0.30
Agric 3 (Grazing)	0.30	0.30
Agric 4 (Hayland-Non-Manured)	0.30	0.30
Forest 1 (Deciduous)	0.30	0.40
Forest 2 (Non-Deciduous)	0.30	0.40
Forest 3 (Mixed Forest)	0.30	0.40
Forest 4 (Wetland)	0.05	0.40
Open 1 (Wetland / Pond)	0.05	0.40
Open 2 (Meadow)	0.15	0.30
Open 3 (Cleared/Disturbed Land)	0.30	0.30
Other 1 (Agric-Dairy Farm)	0.30	0.30

Table C-3. Land use categories from NH GRANIT land use data used in Pawtuckaway Lake ENSR-LRM.

ENSR-LRM LAND USE	Land Use Code <sup>1</sup>	Land Use Description	Land Cover Code <sup>2</sup>	Land Cover Description	NWI code <sup>3</sup>	Windshield Survey
Urban 1 (Residential)	11	Residential			not wetland area	
	24	Farmstead				
Urban 2 (Mixed Urban/Commercial)	13	Mixed Urban/ Commercial			not wetland area	
Urban 3 (Roads)	14	Transportation/Roads	140			
	15	Railroads				
	16	Auxiliary Transportation				
Urban 4 (Industrial)	12	Industrial				
Urban 5 (Parks, Recreation Fields, Institutional)	70	Playing Fields/Recreation	17			
	70	Power lines, Nonagriculture Fields	700			
Agric 1 (Cvr Crop)	20	Agriculture				X
Agric 2 (Row Crop)	20	Agriculture	211	Row Crops		X
Agric 3 (Grazing)	20	Agriculture		Hay/rotation/permanent pasture		X
Agric 4 (Hayland-no manure)	20	Agriculture	212	Hay/rotation/permanent pasture		
Agric 5 (Orchard)	20	Agriculture	221	Fruit Orchard		
Forest 1 (Deciduous)	40	Forested	412	Beech/oak		
	40	Forested	414	Paper birch/aspens		
	40	Forested	419	Other hardwoods		
Forest 2 (Non-Deciduous)	40	Forested	421	White/red pine		
	40	Forested	422	Spruce/fir		
	40	Forested	423	Hemlock		
	40	Forested	424	Pitch pine		
Forest 3 (Mixed)	40	Forested	430	Mixed forest		
Forest 4 (Wetland)	40	Forested			PF____	
			610	Forested wetlands		
Open 1 (Wetland / Lake)	50	Water	500	Non-forested wetlands		
	60	Open wetland	620	Open water		
					PSS_, L1_, PEM_	
Open 2 (Meadow)						X
Open 3 (Cleared/Disturbed Land)	70	Gravel pits, quarries				X
			790	Cleared/other open		
			710	Disturbed		
Other 1 (Agric-Dairy Farm)	20			Dairy Farm		X

<sup>1</sup> Land Use data prepared by GRANIT using 1998 data for Rockingham and Strafford County. Land use in other counties are created by ENSR using 2003 aerial photos and land cover data.

<sup>2</sup> Land cover data created by GRANIT using Landsat 5 and 7 imagery and other available raster and vector data.

<sup>3</sup> National Wetlands Inventory (NWI) data is used to improve the accuracy of wetland areas that are either not delineated in the land use and land cover data or poorly represented by raster cells. Priority ranking is given to the Land Use data set for all non-wetland areas, NWI data for wetland areas, and Land cover for forest type areas.

Table C-4. Land use export coefficients (kg/ha/yr) used in Pawtuckaway Lake TMDL.\*

ENSR-LRM Land Use	Runoff P export coefficient range	Runoff P export coefficient used	Source	Baseflow P export coefficient range	Baseflow P export coefficient used	Source
Urban 1 (Residential)	0.11-8.42	0.9*	Reckhow et al. 1980, Schloss and Connor 2000-Table 5	0.001-0.05	0.01	ENSR Unpublished Data; Mitchell et al. 1989
Urban 2 (Mixed Urban/Commercial)	0.11-8.42	1.1	Reckhow et al. 1980	0.001-0.05	0.01	"
Urban 3 (Roads)	0.60-10	1.5*	Dudley et al. 1997	0.001-0.05	0.01	"
Urban 4 (Industry)	0.11-8.42	1.5*	Reckhow et al. 1980	0.001-0.05	0.01	"
Urban 5 (Park/Institutional/Recreation/Cemetery)	0.19-6.23	0.8	Reckhow et al. 1980	0.001-0.05	0.01	"
Agric 1 (Cover Crop)	0.10-2.90	0.8	Reckhow et al. 1980	0.001-0.05	0.01	"
Agric 2 (Row Crop)	0.26-18.26	2.2	Reckhow et al. 1980	0.001-0.05	0.01	"
Agric 3 (Grazing)	0.14-4.90	0.8	Reckhow et al. 1980	0.001-0.05	0.01	"
Agric 4 (Hayland-No Manure)	0.64	0.64*	Schloss and Connor 2000-Table 5	0.001-0.05	0.01	"
Forest 1 (Deciduous)	0.034-0.973	0.15	Schloss and Connor 2000-Table 4	0.001-0.010	0.004	"
Forest 2 (Non-Deciduous)	0.01-0.138	0.093	Schloss and Connor 2000-Table 4	0.001-0.010	0.004	"
Forest 3 (Mixed)	0.01-0.138	0.093	Schloss and Connor 2000-Table 4	0.001-0.010	0.004	"
Forest 4 (Wetland)	0.003-0.439	0.082	Schloss and Connor 2000-Table 4	0.001-0.010	0.004	"
Open 1 (Wetland / Pond)	0.009-0.25	0.065*	Schloss and Connor 2000-Table 5	0.001-0.010	0.004	"
Open 2 (Meadow)	0.02-0.83	0.8	Reckhow et al. 1980	0.001-0.010	0.01	"
Open 3 (Bare Open)	0.25-1.75	0.8	Reckhow et al. 1980	0.001-0.010	0.01	"
Other (Agric-Dairy Farm)	1.385	1.385*	Schloss and Connor 2000-Table 4	0.001-0.100	0.03	"

\*Value is not a median



**Table C-5. Internal loading calculations in Pawtuckaway Lake model.**

	<b>Value</b>	<b>Unit</b>
TP Difference Sept Hypolimnion-May Average Water Column	0.04	mg/L
Sample Size	14	
Hypolimnion Volume (Below 6.5m)	943,686,633	L
Internal TP Load	34.2	kg/yr
Surface area of Anoxic Zone	39.6	ha
Internal TP Coefficient	0.86	kg/ha/yr

**Table C-6. Septic system calculations in Pawtuckaway Lake model.**

Category	# of Dwellings in 125 ft Buffer	People/Dwelling	TP Atten Factor	Mean TP Conc (mg/L)	P Load (kg/person/yr)	P Load (kg/yr)	Water (Gal/Day)	# of Days	Water Load (m <sup>3</sup> /yr)
Year Round Residential	247	2.5	0.2	8	0.72	88.8	65	365	55501.9
Seasonal Residential	62	2.5	0.2	8	0.18	5.5	65	90	3421.3
<b>Total Septic System Loading</b>						<b>94.3</b>			<b>58923.2</b>

**Table C-7. Waterfowl loading calculations in Pawtuckaway Lake model.**

<b>Bird Type</b>	<b># of Birds</b>	<b>P Load (kg/bird/day)</b>	<b>Non-Ice Days (days)</b>	<b>P Load (kg/yr)</b>	<b>Coefficient Source</b>	<b>Bird Count Source</b>
Mallards/Loons	55	0.000505	275	7.6	Scherer et al. 1995	Tom Duffy, Pers. Comm

Table C-8. Water and TP attenuation factors used in Pawtuckaway Lake model.

	Back Creek B	Back Creek A	Round Pond Stream	Loon Cove Brook A	Mountain Brook	Fernalds Brook A	Fundy Brook	Burnhams- North	Burnhams- South	Loon Brook B	White Grove	Fernalds Brook B	Grove Dam Brook	Direct Drainage
<b>Water Loads</b>														
<b>Water Load Calculated using</b>														
<b>Annual Precipitation (m<sup>3</sup>/yr)</b>	14,220,043	413,465	4,644,427	961,332	6,573,362	938,141	445,661	364,275	741,444	74,670	178,773	246,736	321,203	4,614,666
<b>Water Attenuation Factor</b>	16%	16%	16%	16%	16%	16%	16%	16%	16%	16%	16%	16%	16%	16%
<b>Attenuated Water Load- Used for Model (m<sup>3</sup>/yr)</b>	11,944,836	347,311	3,901,319	807,519	5,521,624	788,039	374,355	305,991	622,813	62,723	150,169	207,258	269,810	3,876,319
<b>Calibration Check</b>														
<b>Water Load Calculated using</b>														
<b>Standard Water Yield (m<sup>3</sup>/yr)</b>	12,040,321	342,325	3,894,202	795,130	5,502,354	779,686	380,955	313,697	640,541	63,375	144,075	198,662	265,936	3,775,436
<b>TP Loads</b>														
<b>TP Load Before Attenuation (kg/yr)</b>	352.7	6.8	74.2	15.6	111.5	21.7	7.2	5.2	17.7	1.3	4.6	4.5	6.5	164.4
<b>Subwatershed Attenuation Factor</b>	30%	10%	+20%	15%	25%	20%	20%	20%	20%	0%	20%	5%	20%	0%
<b>TP Load After Subwatershed Attenuation (kg/yr)</b>	246.9	6.1	89.1	13.3	83.7	17.3	5.8	4.2	14.2	1.3	3.7	4.3	5.2	164.4
<b>Attenuation due to Proximity to Outlets</b>	0%	0%	0%	0%	0%	40%	40%	0%	0%	0%	0%	40%	0%	40%
<b>TP Load After Outlet Attenuation- Used in Model (kg/yr)</b>	246.9	6.1	89.1	13.3	83.7	10.4	3.5	4.2	14.2	1.3	3.7	2.6	5.2	98.6
<b>Calibration Check</b>														
<b>Predicted TP Conc with</b>														
<b>Subwatershed Attenuation (mg/L)</b>	0.021	0.018	0.023	0.016	0.015	0.022	0.015	0.014	0.023	0.020	0.025	0.021	0.019	0.042
<b>2001-2006 median tributary TP</b>	0.028	n/a	0.024	n/a	0.04	0.179	0.033	n/a	n/a	n/a	0.019	n/a	n/a	n/a

Table C-9. Predicted water quality parameters from modeled predevelopment scenario for Pawtuckaway Lake.

**Pawtuckaway Lake- Predevelopment Scenario**

Empirical Equation	Equation	Predicted TP (ug/L)
Mass Balance	$TP=L/(Z(F))*1000$	15
Kirchner-Dillon 1975	$TP=L(1-Rp)/(Z(F))*1000$	9
Vollenweider 1975	$TP=L/(Z(S+F))*1000$	12
Larsen-Mercier 1976	$TP=L(1-RIm)/(Z(F))*1000$	10
Jones-Bachmann 1976	$TP=0.84(L)/(Z(0.65+F))*1000$	10
Reckhow General 1977	$TP=L/(11.6+1.2(Z(F))*1000$	6
<b>Average of Above 5 Model Values</b>		<b>9</b>

Variable	Description	Units
L	Phosphorus Load to Pond	g P/m <sup>2</sup> /yr
Z	Mean Depth	m
F	Flushing Rate	flushings/yr
S	Suspended Fraction	no units
Qs	Areal Water Load	m/yr
Vs	Settling Velocity	m
Rp	Retention Coefficient (settling rate)	no units
RIm	Retention Coefficient (flushing rate)	no units

Empirical Equation	Equation	Predicted Value
<b>Mean Chlorophyll</b>		<b>ug/L</b>
Carlson 1977	$Chl=0.087*(Pred TP)^{1.45}$	2.3
Dillon and Rigler 1974	$Chl=10^{(1.449*LOG(Pred TP)-1.136)}$	1.9
Jones and Bachmann 1976	$Chl=10^{(1.46*LOG(Pred TP)-1.09)}$	2.2
Oglesby and Schaffner 1978	$Chl=0.574*(Pred TP)-2.9$	2.5
Modified Vollenweider 1982	$Chl=2*0.28*(Pred TP)^{0.96}$	4.8
<b>Average of Model Values</b>		<b>2.7</b>
<b>Peak Chlorophyll</b>		<b>ug/L</b>
Modified Vollenweider (TP) 1982	$Chl=2*0.64*(Pred TP)^{1.05}$	13.5
Vollenweider (CHL) 1982	$Chl=2.6*(AVERAGE(Pred Chl))^{1.06}$	7.5
Modified Jones, Rast and Lee 1979	$Chl=2*1.7*(AVERAGE(Pred Chl))+0.2$	9.5
<b>Average of Model Values</b>		<b>10.2</b>
<b>Bloom Probability</b>		<b>% of Summer</b>
Probability of Chl > 15 ug/L	See Walker 1984 & 2000	0.0%
<b>Secchi Transparency</b>		<b>m</b>
<b>Mean:</b> Oglesby and Schaffner 1978	$Chl=10^{(1.36-0.764*LOG(Pred TP))}$	4.1
<b>Max:</b> Modified Vollenweider 1982	$Chl=9.77*Pred TP^{-0.28}$	5.2

Variable	Description	Units
"Pred TP"	The average TP calculated from the 5 predictive equation models	ug/L
"Pred Chl"	The average of the 3 predictive equations calculating mean chlorophyll	ug/L

Table C-10. Predicted water quality parameters from modeled scenario without septic loading for Pawtuckaway Lake.

**Pawtuckaway Lake- Scenario without Septic System Loading**

Empirical Equation	Equation	Predicted TP (ug/L)
Mass Balance	$TP=L/(Z(F))*1000$	22
Kirchner-Dillon 1975	$TP=L(1-Rp)/(Z(F))*1000$	12
Vollenweider 1975	$TP=L/(Z(S+F))*1000$	18
Larsen-Mercier 1976	$TP=L(1-Rlm)/(Z(F))*1000$	14
Jones-Bachmann 1976	$TP=0.84(L)/(Z(0.65+F))*1000$	15
Reckhow General 1977	$TP=L/(11.6+1.2(Z(F))*1000$	9
<b>Average of Above 5 Model Values</b>		<b>14</b>

Variable	Description	Units
L	Phosphorus Load to Pond	g P/m2/yr
Z	Mean Depth	m
F	Flushing Rate	flushings/yr
S	Suspended Fraction	no units
Qs	Areal Water Load	m/yr
Vs	Settling Velocity	m
Rp	Retention Coefficient (settling rate)	no units
Rlm	Retention Coefficient (flushing rate)	no units

Empirical Equation	Equation	Predicted Value
<b>Mean Chlorophyll</b>		<b>ug/L</b>
Carlson 1977	$Chl=0.087*(Pred TP)^{1.45}$	3.9
Dillon and Rigler 1974	$Chl=10^{(1.449*LOG(Pred TP)-1.136)}$	3.3
Jones and Bachmann 1976	$Chl=10^{(1.46*LOG(Pred TP)-1.09)}$	3.7
Oglesby and Schaffner 1978	$Chl=0.574*(Pred TP)-2.9$	5.0
Modified Vollenweider 1982	$Chl=2*0.28*(Pred TP)^{0.96}$	6.9
<b>Average of Model Values</b>		<b>4.6</b>
<b>Peak Chlorophyll</b>		<b>ug/L</b>
Modified Vollenweider (TP) 1982	$Chl=2*0.64*(Pred TP)^{1.05}$	20.1
Vollenweider (CHL) 1982	$Chl=2.6*(AVERAGE(Pred Chl))^{1.06}$	13.0
Modified Jones, Rast and Lee 1979	$Chl=2*1.7*(AVERAGE(Pred Chl))+0.2$	15.7
<b>Average of Model Values</b>		<b>16.3</b>
<b>Bloom Probability</b>		<b>% of Summer</b>
Probability of Chl >15 ug/L	See Walker 1984 & 2000	0.4%
<b>Secchi Transparency</b>		<b>m</b>
<b>Mean:</b> Oglesby and Schaffner 1978	$Chl=10^{(1.36-0.764*LOG(Pred TP))}$	3.1
<b>Max:</b> Modified Vollenweider 1982	$Chl=9.77*Pred TP^{-0.28}$	4.7

Variable	Description	Units
"Pred TP"	The average TP calculated from the 5 predictive equation models	ug/L
"Pred Chl"	The average of the 3 predictive equations calculating mean chlorophyll	ug/L

Table C-11. Predicted water quality parameters from modeled scenario without internal loading for Pawtuckaway Lake.

**Pawtuckaway Lake- Scenario without Internal Loading**

Empirical Equation	Equation	Predicted TP ( $\mu\text{g/L}$ )
Mass Balance	$TP=L/(Z(F))*1000$	23
Kirchner-Dillon 1975	$TP=L(1-Rp)/(Z(F))*1000$	13
Vollenweider 1975	$TP=L/(Z(S+F))*1000$	20
Larsen-Mercier 1976	$TP=L(1-RIm)/(Z(F))*1000$	15
Jones-Bachmann 1976	$TP=0.84(L)/(Z(0.65+F))*1000$	16
Reckhow General 1977	$TP=L/(11.6+1.2(Z(F))*1000$	10
<b>Average of Above 5 Model Values</b>		<b>15</b>

Variable	Description	Units
L	Phosphorus Load to Pond	g P/m <sup>2</sup> /yr
Z	Mean Depth	m
F	Flushing Rate	flushings/yr
S	Suspended Fraction	no units
Qs	Areal Water Load	m/yr
Vs	Settling Velocity	m
Rp	Retention Coefficient (settling rate)	no units
RIm	Retention Coefficient (flushing rate)	no units

Empirical Equation	Equation	Predicted Value
<b>Mean Chlorophyll</b>		<b><math>\mu\text{g/L}</math></b>
Carlson 1977	$Chl=0.087*(Pred TP)^{1.45}$	4.4
Dillon and Rigler 1974	$Chl=10^{(1.449*LOG(Pred TP)-1.136)}$	3.7
Jones and Bachmann 1976	$Chl=10^{(1.46*LOG(Pred TP)-1.09)}$	4.2
Oglesby and Schaffner 1978	$Chl=0.574*(Pred TP)-2.9$	5.7
Modified Vollenweider 1982	$Chl=2^{0.28*(Pred TP)^{0.96}}$	7.5
<b>Average of Model Values</b>		<b>5.1</b>
<b>Peak Chlorophyll</b>		<b><math>\mu\text{g/L}</math></b>
Modified Vollenweider (TP) 1982	$Chl=2^{0.64*(Pred TP)^{1.05}}$	21.9
Vollenweider (CHL) 1982	$Chl=2.6*(AVERAGE(Pred Chl))^{1.06}$	14.6
Modified Jones, Rast and Lee 1979	$Chl=2^{1.7*(AVERAGE(Pred Chl))+0.2}$	17.5
<b>Average of Model Values</b>		<b>18.0</b>
<b>Bloom Probability</b>		<b>% of Summer</b>
Probability of Chl >15 $\mu\text{g/L}$	See Walker 1984 & 2000	0.8%
<b>Secchi Transparency</b>		<b>m</b>
<b>Mean:</b> Oglesby and Schaffner 1978	$Chl=10^{(1.36-0.764*LOG(Pred TP))}$	2.9
<b>Max:</b> Modified Vollenweider 1982	$Chl=9.77*Pred TP^{-0.28}$	4.6

Variable	Description	Units
"Pred TP"	The average TP calculated from the 5 predictive equation models	$\mu\text{g/L}$
"Pred Chl"	The average of the 3 predictive equations calculating mean chlorophyll	$\mu\text{g/L}$

Table C-12. Predicted water quality parameters from modeled target scenario Pawtuckaway Lake.

**Pawtuckaway Lake- Target Scenario- In-lake Conc of 12 µg/L**

Empirical Equation	Equation	Predicted TP (µg/L)
Mass Balance	$TP=L/(Z(F))*1000$	19
Kirchner-Dillon 1975	$TP=L(1-Rp)/(Z(F))*1000$	11
Vollenweider 1975	$TP=L/(Z(S+F))*1000$	16
Larsen-Mercier 1976	$TP=L(1-Rlm)/(Z(F))*1000$	12
Jones-Bachmann 1976	$TP=0.84(L)/(Z(0.65+F))*1000$	13
Reckhow General 1977	$TP=L/(11.6+1.2(Z(F))*1000$	8
<b>Average of Above 5 Model Values</b>		<b>12</b>

Variable	Description	Units
L	Phosphorus Load to Pond	g P/m <sup>2</sup> /yr
Z	Mean Depth	m
F	Flushing Rate	flushings/yr
S	Suspended Fraction	no units
Qs	Areal Water Load	m/yr
Vs	Settling Velocity	m
Rp	Retention Coefficient (settling rate)	no units
Rlm	Retention Coefficient (flushing rate)	no units

Empirical Equation	Equation	Predicted Value
<b>Mean Chlorophyll</b>		<b>µg/L</b>
Carlson 1977	$Chl=0.087*(Pred TP)^{1.45}$	3.2
Dillon and Rigler 1974	$Chl=10^{(1.449*LOG(Pred TP)-1.136)}$	2.7
Jones and Bachmann 1976	$Chl=10^{(1.46*LOG(Pred TP)-1.09)}$	3.0
Oglesby and Schaffner 1978	$Chl=0.574*(Pred TP)-2.9$	4.0
Modified Vollenweider 1982	$Chl=2*0.28*(Pred TP)^{0.96}$	6.1
<b>Average of Model Values</b>		<b>3.8</b>
<b>Peak Chlorophyll</b>		<b>µg/L</b>
Modified Vollenweider (TP) 1982	$Chl=2*0.64*(Pred TP)^{1.05}$	17.3
Vollenweider (CHL) 1982	$Chl=2.6*(AVERAGE(Pred Chl))^{1.06}$	10.6
Modified Jones, Rast and Lee 1979	$Chl=2*1.7*(AVERAGE(Pred Chl))+0.2$	13.1
<b>Average of Model Values</b>		<b>13.7</b>
<b>Bloom Probability</b>		<b>% of Summer</b>
Probability of Chl >15 µg/L	See Walker 1984 & 2000	0.1%
<b>Secchi Transparency</b>		<b>m</b>
<b>Mean:</b> Oglesby and Schaffner 1978	$Chl=10^{(1.36-0.764*LOG(Pred TP))}$	3.4
<b>Max:</b> Modified Vollenweider 1982	$Chl=9.77*Pred TP^{-0.28}$	4.9

Variable	Description	Units
"Pred TP"	The average TP calculated from the 5 predictive equation models	µg/L
"Pred Chl"	The average of the 3 predictive equations calculating mean chlorophyll	µg/L