SVE Associates

Engineering * Surveying * Landscape Architecture * Planning

February 10, 2015
Paul M. Gildersleeve, PE
Solid Waste Management Bureau
29 Hazen Dr. – PO Box 95
Concord, NH 03302-0095

RE: Walpole – Ruggiero Processing Facility, 32 Industrial Park Road
Permit #DES-SW-SP-12-001

Dear Paul:

In response to your letter dated January 8, 2015:

Completeness

1. *Per Env-Sw 304.03(f), please submit all disclosure forms required pursuant to Env-Sw 316 to the NHDOJ. This requirement is not only for new owners, directors, and partners.*

   We have submitted revised disclosure forms to the Attorney General's office for Joe Ruggiero, his mother who is his bookkeeper, and his brother John who runs the Facility on a daily basis. We have also submitted financial disclosure forms as well. Jeff Ruggiero is no longer a part of the business.

2. *In Section III(4), "Facility Design Plans/Specifications" of the Application is not checked, while Section III(5) "Facility Design Plans…" is checked. Please explain.*

   We did not check the box for "Facility Design Plans/Specifications", Section III(4), because the building is built and has been inspected by DES staff already. We did check the Section III(5) box because the site plan, copy attached, reflects as-built conditions.

3. *Per Env-Sw 315.05(c)(4)(a) and Env-Sw 1103.05, please provide a Solid Waste permit number, seasonal restrictions, and a construction schedule on the plans.*

   The permit number has been added to the site plan. There are no seasonal restrictions and no further building construction is planned at this time.

4. *Section VI(5) of the Application is missing. Please explain.*

   We amended the previous response to Section VI to include VI(5) and have attached it herewith.

5. *While RSA 149-M:11(III)(b-c) were addressed, the remainder of RSA 149-M:11 was not been addressed as required by Env-Sw 315.05(g) and Section VII of the Application. Please explain.*

47 Marlboro St., Keene, NH 03431 Phone: (603) 355-1532 Fax (603) 355-2969 E-mail svek@sveassoc.com
P.O. Box 1818, Brattleboro, VT 05302-1818 Phone: (802) 257-0561 Fax (802) 257-0721

We have revised Section VII, copy attached.

6. *Env-Sw 315.05(i and j) and Section IX of the Application were not addressed. Please explain.*

   I assumed that we would move to the public hearing process, Section IX, only after you had gotten all the responses you needed and deemed the application complete. Once you are satisfied I will submit the required information.

7. *In Section II(1) of the Application, the name of the company is not listed as the permittee. Please explain.*

   I revised the application form to reflect the permittee/applicant to be Ruggiero Processing Facility, LLC

8. *Section III(5) of the Application states a revised Closure Plan was submitted. However, only page 3 of 9 of the Closure Plan was included. Please submit the entire Closure Plan for review.*

   The entire Closure Plan is attached for review and approval. The only change made was to add 32 to the location address, as requested.

Application

9. *In Section VI(2), please address all the requirements of Env-Sw 1005.01(d), not just odor. Also, please describe in more detail the phrase "any longer than necessary."*

   We amended our responses to Section VI(2).

10. *In Sections VI(3 and 4), please describe in more detail how recyclables will be removed.*

    We amended our responses to Section VI(3 and 4).

Operating Plan

11. *The Site Plan shows access is through a lot to the south of the property. If this lot is not owned by the permittee, please provide an access agreement with this property owner. Please describe this agreement in Section 3.02 of the Operating Plan.*

    Ruggiero/Hodgkins had a boundary line adjustment approved by the Walpole Planning Board subsequent to our prior approvals, so Ruggiero now owns much, but not all of the land now used to access the site. A binding written agreement between Ruggiero and Hodgkins is attached.

12. *In Section 1.03, please describe all the different wastes that comprise the 90 tons of waste storage capacity.*

    The 90 tons of waste is expected to be composed of MSW and C&D materials that are not suitable for recycling. Section 1.03 has been modified as requested.

13. *In Section 3.02(2)(a), 2nd paragraph, the staging period is given as no longer than one week. However, in Section 1.04, it is given as 72 hours. Please explain.*

    3.02(2) of the Operating Plan has been revised to reflect staging of sorted recyclables on-site for not more than a week, and MSW staged on-site for not more than 72 hours.

14. *In Section 3.02(2)(c) it is mentioned that MSW may be temporarily stored in a loaded trailer in the staging area. Please show where this staging area is on the Site Plan. Please also describe in Section 5.05 what odor control measures will be used during this temporary storage time.*

    The reference to staging area refers to either the loading tunnel or the area designated for storage just to the southwest of the building.

    MSW will be dumped on the tipping slab, then moved into the bulk dumpsters in the loading tunnel once the recyclables are removed. Within a couple hours of the bulk dumpster being filled to capacity it will be driven to an approved disposal site. The loaded bulk dumpster may be moved to the designated storage area noted above for a few hours before being hauled away for disposal. The odor will be controlled by a steady and timely rotation of the MSW from the truck to the slab to the bulk dumpster to an approved disposal facility. The time limit of 72 hours on-site should prevent odor problems.

15. *In Section 3.03, 2nd paragraph, "section 405.04(1) below" is stated. However, this section cannot be found in this Operating Plan or the Rules. Please explain. If it is a rule reference, use the nomenclature "Env-Sw" instead of "Section."*

    The reference has been corrected to read RSA Section 149-M:11

16. *In the 4th paragraph of Section 3.03, non-recyclable materials are mentioned. Please describe what these non-recyclable materials are. In the last paragraph of this section and in Section 3.07, Section 6.1.6 is mentioned. Please revise this to Section 6.01(6), if this is the correct reference.*

    Non-recyclables refers to MSW and those C&D materials that are not suitable for recycling. We revised the Section 3.03 to state as much. We corrected the Section reference as suggested.

17. *In Section 3.06, the tonnage of unprocessed recyclables shown on the closure cost estimate is not included. Please explain.*

    We added the tonnage of unprocessed recyclables to Section 3.06 as suggested.

18. *In Section 3.06, Env-Sw 405.03(a and b) are referenced but the information stated following this reference cannot be found in these sections. Please explain.*

    We deleted the reference to Env-Sw 405.03, which came from another closure plan we referenced.

19. *In Section 3.07(1), Env-Sw 405.04(2) is referenced; however, this section does not exist. Also, Sheet C-1 is referenced, but no sheets are labeled C-1. Please explain.*

    We revised the text and deleted reference to Env-Ws 405 from Section 3.07(1). The site plan was previously labeled C-1, such label now removed, in favor of the title SITE PLAN.

20. *On the Site Plan, please show the masonry and concrete products, metal wood, and non-recyclables listed in Section 3.07.*

    The masonry/concrete, metals, and wood are deposited directly into roll off dumpsters. They are not stockpiled on the ground.

21. *Section 4.02(2) lists NHDES Groundwater Discharge Drinking and Groundwater Bureau. However, there is no such bureau. Please explain.*

    We corrected the reference to read Groundwater Discharge Program.

22. *Please place on the Site Plan the hot load area mentioned in Section 6.01(3).*

    We noted the "hot load area" on the Site Plan.

23. *In Section 6.01(6), 4th paragraph, no mention of using materials between layers of batteries, storing batteries on an impervious surface, or labeling the container used to store the batteries is mentioned. Please explain.*

    Batteries are placed on pallets inside one of the 8' x 40' overseas containers. They are shipped off-site before there is a need to stack them.

24. *In Appendix D, no spill response contractor or asbestos contractor are listed. Please explain.*

    We added a spill response contractor and an asbestos contractor to the Emergency Contacts list, Appendix D.

25. *In Section 6.02, the Emergency Contact list date is not current. Please explain.*

    We removed the date of the emergency contacts as it does not need to be a part of body of the Operating plan if provided on the list in Appendix D.

26. *Section 7.01 mentions Env-Sw 1005.07(b)(1-3); however, this reference does not exist in the Rules. Please explain.*

    We deleted the regulatory reference number.

27. *Please update Section 7.0 to incorporate Env-Sw 1600, Solid Waste Facility Operator Training and Certification rules, which were adopted on July 1, 2014. A link to these rules is* http://des.nh.gov/organization/commissioner/legal/rulemaking/documents/env-sw1600-adpt-pstd.pdf.

    We modified Section 7.0 as requested.

28. *In Section 8.01, please state that the facility will not exceed its permitted capacity limits.*

    We edited Section 8.01 as requested.

29. *Section 8.02(4) references Env-Sw 405.05; however, this rule reference does not exist. Please explain.*

    We removed the reference to Env-Sw 405.05.

30. *Env-Sw 405.04(3) is referenced in Section 8.03. However, this rule reference does not exist. Please explain.*

    We removed the reference to Env-Sw 405.04(3).

31. *Section 8.02 references Env-Sw 315(g). However, this rule reference does not exist. Please explain.*

    We removed the reference to Env-Sw 315(g)

Closure Cost Estimate

32. *The Closure Cost Estimate included was not on the new form. Please resubmit this estimate on the form located at the attached link:* http://des.nh.gov/organization/divisions/waste/swmb/documents/transfer_station.xls.

    We put the Closure Cost Estimate, CCE, on the new form, as requested, and have included it with the Closure Report.

33. *On the Closure Cost Estimate, the miscellaneous costs increased from $1,000 to $4,100. Please describe what costs are included under miscellaneous.*

    The Letter of Credit was issued prior to the last change in the CCE which resulted in a reduced estimate amount. To save on the need for a new LoC and because of the new form we adjusted the miscellaneous and legal costs.

Site Plan

34. *Please show where the different wastes are stockpiled inside the building.*

    The waste is not routinely stockpiled inside the building. Once dumped on the tipping floor, the recyclable C&D is removed to adjacent containers of recyclables. The unrecyclable C&D goes into the bulk dumpster. Once the MSW is dumped on the floor, the recyclables are removed to adjacent containers of recyclables and the remainder goes into the bulk dumpster. If necessary to dump a load on the tipping floor before the prior load is sorted and removed, the prior load can be pushed to the side, thus making room for the next load.

35. *Please show the access routes to and from the building. Explain if the "entry/exit to tipping floor" is for a vehicle or a person.*

    We added a note to the plan indicating that the driveway leading to the building from Industrial Park Road is both an access as well as an egress route. The "ENTRY/EXIT TO TIPPING FLOOR" indicates the location of the overhead door the trucks drive both into and out of.

36. *Please ensure the facility sign abides by Env-Sw 1105.05.*

    All signs and certifications required by Env-Sw 1105.05 are readily visible on-site.

37. *The entry/exit ways, walls, and holding tanks shown on the Site Plan do not match the information shown on the Building Detail on Sheet C-2. Please explain.*

    As frequently happens, the contractor took some liberties with the layout and installation of what I believe are non-critical items. I did not oversee the construction nor did I witness the installation but I see nothing that strikes me as unsafe or onerous. Because the construction is complete the details sheet is no longer necessary, thus, no longer a part of this permit application.

38. *Please show the locations on the Site Plan for all the proposed details on Sheet C-2. Please only show the proposed details on Sheet C-2.*

    We are removing the detail sheet from the application.

39. *Please provide a current "Two-Lot Subdivision" plan showing all abutter, lot, and easement information.*

    The latest plan, a Boundary Line Adjustment plan depicting abutters is provided herewith. Also provided is a current Walpole tax map. We highlighted the properties noticed in the last application. We will notice the same property owners again. The abutters list will be updated once you agree the application is complete and ready for public hearing.

40. *The plan title of "Land of C&D Debris Recycling" does not include all of the materials, such as MSW, that the facility accepts. Please explain.*

    We added a list to the site plan of all materials, such as MSW, that the facility is allowed to accept, a list of what is NOT allowed, and we changed the title of the plan to SITE PLAN.

We submit herewith for your review and approval the following:

- All 4 pages of the Type 1 Permit Modification with the permittee name revised.
- Revised responses to Section VI and VII of the application.
- A complete copy of the Operating Plan with 11x17 site plan, holding tank registration form, disposal commitment letters, the emergency contacts list, and an access agreement between Ruggiero and Hodgkins.
- A complete copy of the Closure Plan with Closure Cost Estimate at the end.
- A full size 22x34 site plan, revised, for the Ruggiero Processing Facility, LLC.
- Boundary Line Adjustment plan reflecting abutters.

Please call if you have any questions about this submission. We look forward to your further review and approval.

Sincerely,

SVE Associates

Rob Hitchcock

Rob Hitchcock, P.E.

STATE OF NEW HAMPSHIRE
ROBERT A. HITCHCOCK
No. 7858
LICENSED
PROFESSIONAL ENGINEER

cc: Joe Ruggiero

NEW HAMPSHIRE DEPARTMENT OF Environmental Services

Waste Management Division

For Office Use Only:
WMD Log #:
Date Rec'd.:
No. of Copies:
Fee: $ /Check #

APPLICATION FORM FOR

TYPE I MODIFICATION TO SOLID WASTE MANAGEMENT FACILITY PERMIT

pursuant to
RSA 149-M and New Hampshire Administrative Solid Waste Rule Env-Sw 315

SECTION I. FACILITY IDENTIFICATION

(1)	Facility name: Ruggiero Processing Facility, LLC
(2)	Functional classification: ☒ collection/storage/transfer ☐ processing/treatment ☐ landfill
(3)	Mailing address: PO Box 434, Saxtons River, VT 05154
(4)	Permit number: DES-SW-SP-12-001
(5)	Location, by street address and municipality: 32 Industrial Park Drive, Walpole, NH

SECTION II. PERMITTEE IDENTIFICATION

(1)	Permittee/applicant name: Ruggiero Processing Facility, LLC			
(2)	Mailing address: PO Box 434, Saxtons River, VT 05154			
(3)	Telephone number: 802-384-0397			
(4)	If different than above, identify the individual associated with and designated by the permittee/applicant to be the contact individual for matters concerning this application:			
	(a)	Name: Rob Hitchcock	(b)	Title: Engineer
	(c)	Mailing address: SVE Associates, 47 Marlboro St., Keene, NH 03431		
	(d)	Telephone number: 355-1532	(e)	E-Mail: rhitchcock@sveassoc.com

SECTION III. DESCRIPTION OF PROPOSED MODIFICATION

Describe the proposed modification by answering each of the following questions. Use additional paper as necessary.

(1)	Provide a **BRIEF** description of the proposed modification. [Check box if response is provided on separate paper ☐]
	Due to the closure of Wheelabrator in Claremont, all MSW collected by Ruggiero Trash Removal now gets trucked a great distancet. In an effort to reduce trucking costs, the applicant wants to receive MSW at the subject facility and transfer it to a larger dumpster which thus saves on trucking costs. Simultaneously, the applicant will remove recyclables from the MSW waste stream. Ruggerio would also like to increase the permitted average capacity from 200 T/wk to 400 T/wk.
(2)	Identify whether the proposed modification is a "type I-A" or "type I-B" modification. (If uncertain, use the worksheet provided with the instructions for this form): ☒ Type I-A ☐ Type I-B
(3)	Identify, either below or on separate paper, each written permit condition that will require amendment to effect the proposed modification and provide draft language for the same. [Check box if response is provided on separate paper ☐]
	Permit Condition #6, #7, and #8
(4)	Identify, below, each "last approved plan of record" identified in the permit which will be affected by the proposed modification and will therefore require amendment/revision:

Check here if affected	TYPE OF PLAN	DES APPROVAL DATE	WMD LOG # (Find this number on your copy of the approval)
☐	Facility design plans/specifications	2-22-2012	
☒	Facility operating plan	2-22-2012	
☒	Facility closure plan	2-22-2012	
☒	Facility financial assurance plan	2-22-2012	

(5)	Submit, on separate paper, the proposed amendments/revisions for each document identified pursuant to (4) above, based on the below listed instructions. (Note: The revisions may be presented in the form of replacement pages ready for substitution into the last approved plan of record, each page being clearly marked to show the date of revision. In the event there is no last approved plan of record for any of the following, you must prepare and submit a full plan, including the proposed modification(s), in accordance with the applicable cited Rules.)	
	☒	Facility design plans must be prepared in accordance with Env-Sw 1103.05.
	☒	Facility operating plans must be prepared in accordance with Env-Sw 1105.11.
	☒	Facility closure plans must be prepared in accordance with Env-Sw 1106.04.
	☒	Financial assurance plans must be prepared as specified in Env-Sw 1400 and must include all related draft financial assurance documents required to effect the proposed modification.
(6)	In order for DES to approve the proposed modification, the agency must be able to conclude from the information provided in this application that the proposed modification meets all applicable requirements of the Rules. Therefore, for any aspect of the proposed modification where it may not be self-evident that the proposed change meets all applicable requirements of the Rules, you should explicitly provide such information. Provide your response below and/or use separate paper as necessary. (Check box if response is attached on separate paper ☐)	
	We believe, after discussing with NHDES staff, that the modification to allow MSW and expand the capacity is self evident.	

SECTION IV. SCHEDULE

Provide a proposed schedule for implementing the modification. Use separate paper if necessary. (Check box if response is attached on separate paper ☐)

As soon as NHDES approval can be obtained.

SECTION V. STATEMENT OF NEED

Provide a statement of need describing why the proposed change is necessary or desirable. Use separate paper if necessary. (Check box if response is attached on separate paper ☐)

Due to the closure of Wheelabrator in Claremont, all MSW collected by Ruggiero Trash Removal now gets trucked a greater distance. In an effort to reduce trucking costs, the applicant wants to receive MSW at the subject facility and transfer it to a larger dumpster, thus saving on trucking costs. Simultaneously, the applicant will also remove recyclables from the MSW waste stream. Ruggerio would also like to increase the permitted average capacity from 200 T/wk to 400T/wk.

SECTION VI. IMPACT EVALUATION

On separate paper, identify all impacts, both positive and adverse, which the proposed modification will have, including each of the below listed considerations.

(1) The effect the modification will have on facility function, capacity, life expectancy, service type and service area.

(2) The effect the modification will have on the environment, public health and safety.

(3) The effect the modification will have on the state's ability to achieve the goals and objectives specified in RSA 149-M:2, namely achieving a 40% minimum weight reduction in the solid waste stream on a per capita basis by the year 2000 and avoiding the disposal of recyclable materials in a lined landfill with a leachate collection system.

(4) The effect the modification will have on establishing and maintaining integrated waste management systems consistent with the hierarchy of waste management methods in RSA 149-M:3 [the methods, in descending order of preference as specified in RSA 149-M:3, are: source reduction; recycling and reusing; composting; waste-to-energy technologies (including incineration), incineration without resource recovery; and landfilling].

(5) Consistency with the state solid waste management plan and the applicable district plan, pursuant to RSA 149-M:12,I(b). If necessary, contact the P&DRS at (603) 271-2925 for plan information.

SECTION VII. PUBLIC BENEFIT DEMONSTRATION

Provide a "demonstration of public benefit" based on the below listed instructions. Check which one of the listed instructions applies to your particular application.

☒	**For a type I-A modification of a standard permit**, provide a "demonstration of public benefit" in accordance with RSA 149-M:11 and in conformance with the provisions of Env-Sw 1005.05. Prepare and submit the demonstration on separate paper.
☐	**For a type I-A modification of an emergency permit or a research and development permit, or a permit-by-notification**, there is a presumption of public benefit, provided that the proposed modification meets all requirements of the Rules. Therefore, you may skip this section and go to Section VIII.
☐	**For a type I-B modification**, there is a presumption of public benefit, provided that the proposed modification meets all requirements of the Rules. Therefore, you may skip this section and go to Section VIII.

SECTION VIII. OTHER PERMITS

Complete the following table to identify and provide the status of all other permits or approvals necessary to effect the proposed modification.

Type of Permit/Approval Required	Date the Application was/will be Submitted	Status/Comments
none		

SECTION IX. LEGAL NOTICES

Submit proof of having provided certain legal notifications and filings, as follows:

(1) You must send by certified mail, or deliver in hand, a complete copy of this application to the host municipality, host solid waste management district and other affected entities, with a "notice of filing," as specified by Env-Sw 303.

(2) For a type I-A modification, you must send by certified mail, or deliver in hand, a "notice of filing" to each owner of property abutting the facility site, as specified by Env-Sw 303. If the applicant/permittee or the owner of the facility site owns any abutting parcel of land, the "notice of filing" must be sent to the owner(s) of the next parcel(s) not owned by the permittee/applicant or facility site owner.

(3) You must also provide a "notice of filing" to the New Hampshire Department of Justice/Office of the Attorney General (NH DoJ/AGO) if, pursuant to Section X(2) of this form, you are required to submit business and personal disclosure information.

(4) You must attach to this application "proof" that notification has been provided as required by (1) through (3) above. Therefore, attach a copy of the notice(s) of filing and the signature(s) of all required recipients, acknowledging receipt.

SECTION X. CERTIFICATION OF COMPLIANCE/COMPLIANCE REPORT

All applications for permit modification must be submitted with either certification of compliance or a compliance report, as follows:

(1) If you are ABLE to certify that each of the statements numbered (1) - (8) below are true, do so by your signature.

If you are UNABLE to certify that each of the statements numbered (1) - (8) below are true, you must:

- ☐ Prepare and submit a separate Compliance Report as specified by Env-Sw 303.15; and
- ☐ If the proposed modification involves a change in organizational structure, or a change in individuals/entities holding 10% or more of the permittee's debt or equity, or a change in officers, directors, partners or key employees, none of which constitutes a change in operational control of the facility or a change in ownership per Env-Sw 315.02(f), also submit completed "business and personal disclosure forms" for each non-compliant individual and entity involved in the change. Obtain the required forms from the P&DRS at (603) 271-2925. Submit the completed forms, with the notice of filing referenced by Section IX(3) of this form and a copy of the Compliance Report, direct to the New Hampshire Department of Justice/Office of Attorney General, Environmental Protection Bureau, 33 Capitol Street, Concord, NH 03301-6397. [Note: Copies of the completed disclosure forms should NOT be attached to this application when it is submitted to DES or to the host municipality, host solid waste management district and other effected entities, pursuant to Section IX(1) above. Only the NH DoJ/AGO should receive copies of the disclosure forms].

COMPLIANCE STATEMENT

The applicant shall certify that each of the statements listed in (1)-(8) below are true for each of the following individuals and entities:

- ☒ **The applicant, and**
- ☒ **The facility owner, and**
- ☒ **The facility operator, and**
- ☒ **All individuals and entities holding 10% or more of the applicant's debt or equity, and**
- ☒ **All of the applicant's officers, directors, and partners, and**
- ☒ **All individuals and entities having managerial, supervisory or substantial decision making authority and responsibility for the management of the facility operations or the activity(s) for which approval is being sought.**

(1)	No individual or entity listed above has been convicted of or plead guilty or no contest to a felony in any state or federal court during the 5 years before the date of the application.
(2)	No individual or entity listed above has been convicted of or plead guilty or no contest to a misdemeanor for a violation of environmental statutes or rules in any state or federal court during the 5 years before the date of the application.
	No individual or entity listed above has owned or operated any hazardous or solid waste facility which has been the subject of an administrative or judicial enforcement action for a violation of environmental statutes or rules during the 5 years before the date of the application.

(4)	No individual or entity listed above has been the subject of any administrative or judicial enforcement action for a violation of environmental statutes and rules during the 5 years before the date of the application;	
(5)	All hazardous and solid waste facilities owned or operated in New Hampshire by any individual or entity listed above are in compliance with either.	
	(a)	All applicable environmental statutes, rules, and DES permit requirements; or
	(b)	A DES approved schedule for achieving compliance therewith.
(6)	All individuals and entities listed above are in compliance with all civil and criminal penalty provisions of any outstanding consent agreement, settlement, or court order to which DES is a party.	
(7)	All individuals and entities listed above have paid, or are in compliance with the payment schedule for any administrative fine assessed by DES.	
(8)	All individuals and entities listed above are in compliance with all terms and conditions under every administrative order, court order or settlement agreement relating to programs implemented by DES.	

Signature of the permittee/applicant certifying the above statements are true:

Permittee/Applicant Name (Print Clearly or Type) Joseph Ruggiero

Permittee/Applicant Signature [signature]

Date 2/10/15

SECTION XI. PERMITTEE/APPLICANT SIGNATURE REQUIREMENTS

The permittee/applicant must sign the following statement prior to submitting this application. All copies of the application filed with DES must bear the permittee's/applicant's ORIGINAL signature. If the permittee/applicant is not an individual, an individual duly authorized by the permittee/applicant shall sign the application.

To the best of my knowledge and belief, the information and material submitted herewith is correct and complete. I understand that any approval granted by DES based on false and/or incomplete information shall be subject to revocation or suspension, and that administrative, civil or criminal penalties may also apply. I certify that this application is submitted on a complete and accurate form, as provided by DES, without alteration of the text.

Permittee/Applicant Name (Print Clearly or Type) Joseph Ruggiero

Permittee/Applicant Signature [signature]

Date 2/10/15

SECTION XII. PROPERTY OWNER SIGNATURE

If the permittee and property owner are not the same, the property owner must also sign this form as follows. All copies of the application filed with DES must bear the property owner's ORIGINAL signature. If the property owner is not an individual, an individual duly authorized by the property owner shall sign the application.

(1)	I hereby affirm that the permittee/applicant has the legal right to occupy and use the property on which the subject facility is or will be located for the purposes specified in this application.
(2)	I hereby affirm that I shall grant access to the property for closure and post-closure monitoring of the subject facility and site as required by RSA 149-M and the New Hampshire Solid Waste Rules (Env-Sw 100 - 300 and Env-Sw 400 - 2000), as amended.

Property Owner Name (Print Clearly or Type) same

Property Owner Signature [signature]

Date 2/10/15

Type 1A Modification to Solid Waste Management Facility Permit

Section VI - Impact Evaluation Responses

(1) Identify the effect the modification will have on facility function, capacity, life expectancy, service type and service area;

The facility function changes only in that MSW would be accepted in addition to recyclables and C&D. The MSW, as with the recyclables and C&D, will be "repackaged" and transported off-site. The modification will allow the facility to be better utilized without exceeding permitted capacity. The life expectancy and service area remains the same.

The service type changes only as a result of introducing MSW to the site. By handling the MSW inside the facility building, and by limiting the time frame MSW will be on-site to 72 hours, we limit the potential problems such as dust, litter, insects, odors, vectors, spills, leachate, fire hazards, obnoxious and explosive gases, noise, and nuisance.

(2) Identify the effect the modification will have on the environment, public health, and safety;

There is no anticipated negative effect on the environment, public health, or safety. The MSW would be repackaged into larger dumpsters and shipped as soon as possible so odor does not become an issue. MSW will not stay on-site any longer than 72 hours. The repackaging into larger dumpsters will reduce the number of truck trips and miles driven so there is a benefit to the public in terms of reduced traffic and fuel consumed.

There presently are several cats who call the facility home. The cats will quickly eliminate all rodents that might appear and should minimize the vectors as well.

(3) Identify the effect the modification will have on the State's ability to achieve the goals and objectives .....namely achieving a 40% minimum weight reduction in the solid waste stream on a per capita basis by the year 2000 and avoiding the disposal of recyclable materials in a lined landfill with a leachate collection system;

There will be a reduction in the waste stream volume as recyclables will be removed as the MSW is being transferred from the small trucks/dumpsters to the large dumpsters. Ruggiero provides residential and commercial customers with colored bags in which to place recyclables such as bottles, cans, and papers. The colored bags make removing recyclables from the MSW waste stream easier.

(4)) Identify the effect the modification will have on establishing and maintaining integrated waste management systems consistent with the hierarchy of waste management methods, such as source

SVE Associates

Engineering * Surveying * Landscape Archicture * Planning
47 Marlboro St., Keene, NH 03431 Phone: (603) 355-1532 Fax (603) 355-2969 E-mail svek@sveassoc.com

reduction, recycling and reusing, composting, waste to energy technologies, incineration without resource recovery, and landfilling:

There will be a reduction in the waste stream volume as recyclables will be removed as the MSW is being transferred from the small trucks/dumpsters to the large dumpsters. As stated above, Ruggiero will provide his customers with plastic bags in which to place recyclables. The colored bags makes identification and retrieval of recyclables much easier and more efficient.

There will also be fewer trucks on the road to approved landfills each day, thus reducing in small part the carbon footprint of waste management. Source reduction and waste to energy technologies will not be impacted by the modification.

(5) Identify the consistency with the State Solid Waste management plan and the applicable district plan:

The proposed modification does not in any way contradict the State's nor the districts Solid Waste Management plan.

SVE Associates

Engineering * Surveying * Landscape Archicture * Planning
47 Marlboro St., Keene, NH 03431 Phone: (603) 355-1532 Fax (603) 355-2969 E-mail svek@sveassoc.com

Ruggiero Processing Facility

Section VII

Operating Plan

Permit No. DES-SW-SP- 12-001

Prepared for:

Ruggiero Processing Facility, LLC

P.O. Box 434

Saxtons River, VT 05154

November 2010

revised thru February 2, 2015

Table of Contents

Section 1.0 Facility Information **5**

1.01. Facility Contact information *5*

1.02. Facility Type *5*

1.03. Facility Capacity *5*

1.04. Facility Service Type *5*

1.05. Facility Service Area *6*

1.06. Facility Permittee, Operator, and Property Owner Information *6*

Section 2.0 Authorized and Prohibited Materials **6**

2.01. Authorized Materials *6*

2.02. Prohibited Materials *7*

Section 3.0 Routine Operations Plan **7**

3.01. Hours of Operation *7*

3.02. Access Control and On-site Traffic Patterns *7*

3.02(1). Incoming Traffic – Loading 8

3.02(2). Outbound Traffic 8

3.03. Materials Acceptance, Inspection and rejection procedures *9*

3.04. Incoming Materials Quantity and Source Determination *10*

3.05. Outgoing materials – Quantity and Destination Recording Procedures *10*

3.06. Storage Time and Capacity Limits and Monitoring Procedures *10*

3.07. Collection, Processing, Storage, Transfer and Off-site Disposal *11*

3.07(1). Recyclables 11

3.07(2). Masonry & Concrete Products 11

3.07(3). Metal 11

3.07(4). Wood 11

3.07(5). Non-Recyclables 11

3.07(6). Municipal Solid Waste

Section 4.0 Residuals Management Plan **12**

4.01. Type and Quantity of Residuals *12*

4.02. Residuals Management Procedures 12

4.02(1). Moisture from waste 12

4.02(2). Liquids from the trailer loading tunnel 13

4.02(3). Non-recyclable Material 13

4.02(4). General Shop waste 13

4.03. Waste Disposal 13

4.04. Quality Assurance/Quality Control Provisions 13

Section 5.0 Facility Maintenance, Inspection and Monitoring Plan 14

5.01. Spontaneous Combustion 14

5.02. Other Fire Hazards 14

5.03. Vector Control 15

5.04. Methane, Hazardous and/or Explosive Gas Generation 15

5.05. Odors 15

5.06. Dust 15

5.07. Windblown Litter 16

5.08. Leachate 16

5.09. Spill Management 16

5.10. Storm Water Management 16

Section 6.0 Contingency Plan 16

6.01. Emergency Planning 17

6.01(1). Severe Storm 17

6.01(2). Fire/Explosion 17

6.01(3). Hot Loads 18

6.01(4). Medical Emergency/Personal Injury 18

6.01(5). Major Spills 18

6.01(6). Unacceptable Waste 19

6.02. Emergency Contacts 21

Section 7.0 Employee Training Program 21

7.01. Facility Staffing 21

7.02. Supervisory and Operating Personnel Training 21

7.03. Documentation of Training 22

Section 8.0 Recordkeeping and Reporting 22

8.01. Information Compilation 22

8.02. Recordkeeping Requirements 22

8.03. Facility reporting requirements 24

Appendix A - Site Plan 25

Appendix B - Registration of Nondomestic Wastewater Holding Tank 26

Appendix C - Disposal Commitments 27

Appendix D - Emergency Contacts 28

Appendix E – Access Agreement 30

Section 1.0 Facility Information

1.01. Facility Contact Information

The Facility name, location, mailing address and property owner are as follows:

Name:	RUGGIERO PROCESSING FACILITY
Location:	32 Industrial Park Road, Walpole, NH
Mailing Address:	Ruggiero Processing Facility, LLC P.O. Box 434 Saxtons River, VT 05157

1.02. Facility Type

RUGGIERO PROCESSING FACILITY (hereafter RPF) is categorized by the State of New Hampshire Department of Environmental Services Waste Management Division (NHDES-WMD) as a commercial facility for the collection, storage and transfer of solid waste as defined by Env-Sw 102.35. The term includes "transfer station" as defined by Env-SW 104.54 and "recycling facility" as defined by Env-Sw 104.20. Storage of recyclables will occur either inside the building or outside in covered containers.

1.03. Facility Capacity

The Capacity of the facility is not subject to a fixed daily maximum throughput. Facility processing and storage capacity is restricted so that the "average weekly tonnage received at the facility (during the quarter in which the most tonnage is anticipated and received), shall not exceed 400 tons." Maximum quantity of processed recyclable material in storage at any one time is 60 tons. Maximum quantity of unprocessed recyclable material in storage at any one time is 12 tons. Maximum quantity of municipal solid waste in storage waiting to be trucked off site for proper disposal at any one time is 60 tons. The total tonnage stored on-site at any given time shall not exceed 132 tons.

The 132 tons of waste is a mix of all materials allowed by permit:

- Recyclable materials, including glass, aluminum, steel cans, paper, high density polyethylene (HDPE), and polyethylene terephthalate (PET) plastics, and metal.
- Construction and Demolition debris.
- Municipal Solid Waste (MSW).

1.04. Facility Service Type

The facility is a collection, storage and transfer facility, operated on a commercial basis and includes the recycling and transfer of material hauled by:

- Local Waste Haulers
- Residents whose load consists of construction and demolition debris.
- Local contractors

RPF accepts non-recyclable materials and various recyclable materials that are appropriate for recovery and re-use. All recyclable and non-recyclable materials are transported off site to facilities authorized to accept the respective materials.

1.05. Facility Service Area

The facility service area includes southwestern and central western New Hampshire and spot markets with an unlimited service area as defined by Env-Sw 102.37. RPF services commercial, municipal and occasional residential loads.

1.06. Facility Permittee, Operator, and Property Owner Information

Permittee and Operator:

Ruggiero Processing Facility, LLC
P.O. Box 434
Saxtons River, VT 05157

Property Owner:

same

Section 2.0 Authorized and Prohibited Materials

2.01. Authorized Waste

- Recyclable materials including glass, aluminum, steel cans, paper, high density polyethylene (HDPE) and polyethylene terephthalate (PET) plastics, and metal, as defined by Env-Sw 104.19; and
- Construction/Demolition debris as defined by Env-Sw 102.42.

- Municipal Solid waste, MSW, as defined by Env-Sw 103.46.

2.02. Prohibited Waste

- Hazardous waste;
- Sludge or septage waste;
- Asbestos waste;
- Infectious waste;
- Contained gaseous waste;
- Universal waste batteries (except for incidental lead-acid batteries);
- 55-gal drums or other liquid containers (except for five gallon or less empty containers incidental to the load);
- Explosives;
- Ash;
- Mercury containing devices;
- Liquid waste; and
- Other wastes not otherwise authorized by condition 6 of the permit.

Section 3.0 Routine Operations Plan

3.01 Hours of Operation

The facility is open to receive recyclables, non-recyclables, and MSW six days per week within the following hours:

Monday through Friday:	7am to 5pm
Saturdays	7am to noon

Hours of operation, which may be less extensive than those allowed by its DES permit, are prominently displayed on the facility entrance sign.

3.02. Access Control and On-Site Traffic Patterns

Appendix A provides a site plan for the facility, which, in addition to general site features and layout, shows the location of the following: entrance, access road, turn-around area, hot load area, recyclables storage, unloading/recycling building, and container storage areas.

The entrance from Industrial Park Road is over land owned by Hodgkins and Sons, Inc. An agreement for access has been obtained and a copy is provided herewith in Appendix E.

The following site security measures are provided to minimize the potential for unauthorized access to the facility in accordance with Env-Sw 1103.03.

- On site facilities are locked during non-operating hours.
- Weather resistant signs, which indicate that access is restricted, are posted around the perimeter.
- Vehicular entrances are gated and locked during non-operating hours.

The off-site administrative office provides record keeping and filing space. The recycling facility consists of a 50' x 88' steel building with a concrete tipping floor. Areas are designated for material discharge, storage and a trailer loading area. Access inside is maintained at all times for fire protection via a lockbox located at the main gate.

3.02(1). Incoming Traffic – Loading

Incoming collection vehicles enter the facility from Industrial Park Road, off Route 12, via a gravel entrance. Vehicles back up into the recycling building onto the concrete tipping floor where they discharge their loads. After discharge vehicles leave the building through the same door and exit the site back to Industrial Park Road.

3.02(2). Outbound Traffic

3.02(2)(a).Non-recyclables

Empty open-top transfer trailers enter the site via the main entrance. The driver backs up to the loading tunnel (lower slab of building), where the roll off dumpster is loaded. They then proceed to the facility entrance/exit onto Industrial Park Road and back onto Route 12.

On occasion, it may be necessary to temporarily store a loaded trailer in the staging area or loading tunnel before being transported off site. While unusual, storage may be over night, but in no instance will the staging period exceed 72 hours.

3.02(2)(b). Recyclables

Empty roll off containers are used to hold recyclable material and covered before being transported to end users or secondary material markets. Loaded roll off containers may

sit on-site for a week but in general, will be shipped to the end user or secondary materials market within a day of the container being filled.

3.02(2)(c). Municipal Solid Waste

Fully enclosed waste hauling transfer vehicles will enter the site via the main entrance and proceed to the building. The driver backs up to the tipping floor and dumps their load. They then proceed to the facility entrance/exit onto Industrial Park Road and back onto Route 12.

MSW will not be tipped until recyclables and C&D debris has been removed from the tipping floor, or pushed to the side, and vice versa, to avoid comingling of product. The building is large enough to accommodate multiple piles.

On occasion, it may be necessary to temporarily store a loaded trailer in the loading tunnel or the staging area before being transported off site. While unusual, storage may be over the weekend, but in no instance will the period exceed 72 hours.

3.03. Materials Acceptance, Inspection and Rejection Procedures

Each customer is required to provide information regarding the type and source of recyclables, non-recyclables, and MSW brought to the facility. A sign posted at the entrance to the facility lists prohibited waste.

Upon arrival at the site, the information is collected per section 3.4 below by the attendant. Should any wastes arrive from out of State, the attendant determines whether there are public benefits as defined by RSA Section 149-M:11. Finally, he categorizes the type of materials into either: non-accepted materials, construction/demolition debris, recyclables, or MSW.

Once information has been taken, the vehicles are backed into the building where the load is tipped onto the concrete floor. The material is visually inspected; metal, concrete, wood and other recyclable/re-usable materials that are appropriate for recovery are separated by hand and/or by machine.

The non-recyclables, MSW, and C&D materials not suitable for recycling, are pushed to the rear of the building to clear the floor for the next load. An open-top transfer trailer is positioned in the loading tunnel to receive non-recyclable materials as it accumulates. The trailer is top loaded and material compacted as necessary. When the trailer is full, it is secured and removed from the tunnel for transfer per 3.02(2)(a) above.

Facility operators have been trained to identify and properly manage materials not meeting facility acceptance requirements. The process used to manage unauthorized material is described in Section 6.01(6).

3.04. Incoming Materials Quantity and Source Determination

The facility uses cubic yard measure to quantify the size of all incoming loads. The following is recorded for each load: cubic yards, generator name and address, hauler name and address, truck number or license number, type of recyclable or non-recyclable material, date and time.

The attendant logs this information into the facility's tracking and billing system. The driver retains the signed original and the facility retains a copy for its records in accordance with section 8.

3.05 Outgoing Materials – Quantity and Destination Recording Procedures

Similar to the incoming vehicle procedures, all outbound materials are measured in cubic yards before exiting. Prior to leaving the site, the truck is stopped and data is collected and entered into the tracking and billing system. For recyclable loads, the type and cubic yards of the recovered material and information regarding the secondary material market is also recorded.

The RPF facility sends recyclables to authorized facilities for re-use; disposal of recyclable materials in a landfill is avoided. The operator maintains accurate records of all material transported to authorized disposal facilities or secondary materials markets located in New Hampshire, or out of state. These records are maintained in accordance with requirements described in section 8 and are identified in the DES annual facility report which RPF prepares and submits for the previous year's operation.

3.06 Storage Time and Capacity Limits and Monitoring Procedures

All incoming materials are actively managed in a manner that limits the quantity of non-recyclable material stored on site at any one time to a maximum of 60 tons.

Recoverable materials are separated and temporarily stored either inside the recycling building or outside in roll off containers. Maximum quantity of the processed recyclables material in storage at any one time is 60 tons. The maximum quantity of the unprocessed recyclables on-site at any one time is 12 tons.

Material will not be stored for a period of time which results in adverse affects to the environment, public health or safety.

Any/all putrescible and other non-recyclables will be loaded into open top transfer trailers throughout the day and will normally be transported to a permitted disposal facility on the day that it is received at the facility.

When it is not possible to transport the materials to the disposal facility within that facility's daily operating hours, it may be temporarily stored on the recycling building tipping floor or in a transfer trailer and transferred off site before producing noticeable odor. In no case shall loaded containers of non-recyclable waste and/or MSW be stored on-site longer than 72 hours.

3.07. Collection, Processing, Storage, Transfer and Off-Site Disposal

Material will be inspected as it is being dumped on the tipping floor. The operations staff will visually inspect the material during the process of spreading and removing recyclable material to ensure that unacceptable materials as defined in section 2.2 are not present.

Any unacceptable wastes encountered will be managed in accordance with Section 6.01(6). All other materials are managed as follows:

3.07(1). Recyclables

Recyclables are segregated and managed according to the following procedures to preserve value. All reasonable measures are taken to segregate recyclables form non-recyclables to ensure that they are diverted from landfill disposal.

Recyclables will be temporarily stored in roll-off containers till the containers are full, at which time they are transported off site.

3.07(2). Masonry & Concrete Products

Brick, masonry products and concrete are stored in roll off containers located outside but near the recycling building.

3.07(3). Metal

Ferrous and non ferrous metal and wire are separated and stored outside in a roll off container and transported to a metal reclamation facility when the container is full.

3.07(4). Wood

Clean wood is stored outside in a roll off container.

3.07(5). Non-Recyclables

Once the recyclable materials are removed, the remaining materials are handled as non-recyclables and removed to

open top transfer trailers which are covered and secured when filled to capacity.

3.07(6). Municipal Solid Waste

MSW will be trucked to the site, dumped on the tipping floor, and recyclables will be removed. The remaining MSW will then be put into larger dumpsters and hauled to an approved disposal facility.

Section 4.0 Residuals Management Plan

4.01. Type and Quantity of Residuals

RPF generates the following residual materials requiring special management:

- Moisture that may drain out of materials deposited on the tipping floor.
- Liquids from the trailer loading tunnel. Quantity of liquids accumulated will vary depending on the mix of incoming materials.
- Non-recyclable materials. Volume will vary depending on incoming materials and respective market opportunities.

4.02. Residuals Management Procedures

The following is a brief description of the methods and procedures used by RPF to address each of the respective residual streams:

4.02(1). Moisture from waste

Moisture entrained in the materials is normally absorbed as the material is spread, separated and compacted on the tipping floor.

On inclement days with significant precipitation, some liquid from the material may accumulate on the tipping floor. If this occurs and the volume exceeds that which can be absorbed in the spreading and compacting process, sawdust or other absorbent material is spread and used to absorb the liquid. This material is then mixed with the non-recyclable material and shipped off site for disposal.

4.02(2). Liquids from the Trailer Loading Tunnel

The recycling building is equipped with a floor drain and a 1000 gallon liquid holding tank to collect liquids from the trailer loading tunnel.

The holding tank meets the design criteria of Env-Sw 404 and has been registered with NHDES Groundwater Discharge Program. (*See Appendix B*) It is equipped with a visual signal alarm, which is activated once the level reaches the maximum water depth. The liquid is emptied as needed and transported off site to a local municipal wastewater treatment facility for disposal.

4.02(3). Non-Recyclable Material

The non-recyclable materials are segregated from the incoming materials and managed as described in Section 3.07.

4.02(4). General Shop Waste

All internally generated waste and/or recyclable material are incorporated into the respective management procedures outlined above.

4.03. Waste Disposal

In accordance with Env-Sw 1105.10, the facility will maintain access to a minimum of two authorized disposal locations (*See Appendix C*) which are permitted to dispose of the expected quantity of non-recyclable materials:

- Site One: Keene, NH
- Site Two: Hammond Grinding, Canaan, NH
- Other permitted and authorized facilities, as necessary, to ensure that non-recyclable material is efficiently processed though the facility.

Similarly, agreements (*See Appendix C*) will be maintained at a minimum of two locations for disposal of the liquid from the holding tank: Keene WWTP & Bellows Falls WWTP.

4.04. Quality Assurance/Quality Control Provisions

RPF and authorized disposal facilities regularly communicate regarding acceptable and prohibited materials. Facility operating staff are trained in identification of prohibited materials; these procedures are followed by all facility operating staff.

Section 5.0. Facility Maintenance, Inspection and Monitoring Plan

Facility operating and supervisory staff are trained pursuant to Section 7.0. During facility operation, staff are alert to potential situations that may require their immediate attention and to ensure safe operating conditions and prevent adverse situations as noted in the following sections:

5.01. Spontaneous Combustion

The possibility of spontaneous combustion is limited since incoming materials are actively managed and do not include volatile materials. In addition, the materials are generally transported off site daily as described in Section 3.07. Finally, the building is metal framed with a concrete floor and steel siding, designed and constructed to limit the potential of fire.

An automatic fire detector will be installed inside the recycling building, should a fire occur during operating hours, the owner is immediately contacted, and if no answer is detected, the Walpole Fire Department is automatically called to ensure immediate response.

In the unlikely event of a fire, procedures as outlined in Section 6.01(2) will be followed.

5.02. Other Fire Hazards

Although unlikely that a "hot" load would be delivered to the facility, all drivers are encouraged to take immediate action in the event of a fire or other safety concern. All drivers are instructed to immediately contact the RPF office and building attendant so assistance can be provided.

RPF personnel will be prepared for the arrival and manage the load once it arrives. Procedures as outlined in Section 6.01(3) will be followed.

Once controlled, an assessment will be made prior to discharging the load to determine the immediate need to notify and request assistance from the Walpole Fire Department.

Should a fire occur inside the building, the procedures described in Section 6.01(2) will be followed.

5.03. Vector Control

The facility is operated to minimize the potential for vectors. Recycling and transfer operations occur within the enclosed building. Other than during inspection and processing on the tipping floor, all non-recyclable materials are containerized into open top transfer trailers and covered by a tarp upon being filled to capacity. Materials are actively removed so that the potential for vectors is minimized.

RPF staff will regularly inspect the facility for vectors and will retain the services of a licensed pest control company to ensure that vectors do not become a problem. The Facility is now home to several cats who will keep rodents under control.

5.04. Methane, Hazardous and/or Explosive Gas Generation

Any putrescible material will be removed from the facility before anaerobic decomposition can generate methane, hazardous or explosive gases.

Hazardous and/or explosive gases are not accepted or managed by the facility; liquids and gaseous wastes are prohibited.

5.05. Odors

The facility operations are conducted inside an enclosed building. In accordance with the operating permit, storage capacity and times are limited as presented in Section 3.07. Since non-recyclable material and MSW are typically transported off site daily, the potential for odor generation is minimized. Recyclables are transferred off site as containers are filled. Adherence to the facility operating procedures generally prevents and/or controls odor issues.

The facility is located on approximately 13 acres and operated in a manner consistent with applicable NH Solid Waste Regulations. Although odor generation is minimized, RPF will investigate the potential source in the event off site odors are detected and, if facility related, adjust operations accordingly. (e.g., apply odor neutralizing agents, arrange faster transfer, and check proper load tarping).

5.06. Dust

The majority of on-site travel surfaces are gravel. The areas potentially contributing to dust generation are the access road and circulation areas.

The site is located in an isolated part of a former sand and gravel pit. The location helps minimize the impact of dust off site.

5.07. Windblown Litter

Material transfer operations occur within the building.

Most vehicles using the facility will be self contained packers and roll off trucks. Drivers are instructed to keep loads covered until they reach the turn- around area to reduce the potential for litter generation.

To ensure that litter is properly managed, facility operational staff will inspect the site daily and collect litter or debris found. This material will be placed with other incoming material in the recycling building and processed accordingly.

5.08. Leachate

Section 4.0 Residuals Management describes procedures that are used to manage any liquids collected from materials that are processed at the facility.

5.09. Spill Management

Spills are managed in accordance with Section 6.01(5) Contingency Plan.

5.10. Storm Water Management

Storm water is generally managed as sheet flow from gravel surfaces and ultimately infiltrates into vegetated areas. Storm water off slabs and what drips off vehicles in the building will be collected with floor drains and piped into the holding tank.

Section 6.0 Contingency Plan

The following contingency plan for Ruggiero Processing Facility discusses the potential emergency conditions, respective likelihood for occurrence and appropriate response to be taken by staff in an event.

Because of the no-toxic, non-hazardous nature of materials received at the RPF, emergencies of any kind are unlikely. Notwithstanding, several precautions and procedures are in place to assure appropriate responses in the event of a release or accident. RPF has designated an Emergency Coordinator and Alternate Emergency Coordinator who assist in managing response activities should any of the following emergency situations occur at the facility.

In addition, RPF has posted emergency phone numbers in the recycling building and on the lock box at the main gate.

6.01. Emergency Planning

This plan describes the actions to be undertaken in response to the following:

- Severe storm
- Fire/Explosion
- Hot Loads
- Medical emergency
- Chemical spills
- Unacceptable waste

6.01(1). Severe Storm

The operations staff evaluate whether early closure of the facility is warranted. If the daily operation cannot be completed in time, the building and all vehicles will be shut down and secured until operations are safe to resume.

6.01(2). Fire/Explosion

The facility does not store any petroleum or other combustible products; therefore the likelihood of a fire or explosion is low. However, to assure full preparedness, hand-held fire extinguishers are located near the entry to the recycling building.

The materials unloaded inside the recycling building are managed in accordance with Env-Sw 404.05(d) (3). Access is maintained at all times in the event fire services are necessary.

Water supply in the event of a fire is off site via emergency vehicles.

Site personnel are trained to notify the fire department in the event of a fire and to use the appropriate fire extinguishers until the fire department arrives. A lock box system is provided to ensure that the fire department can always access the building.

Finally, an automatic fire detector alarm will be installed in the recycling building; should a fire occur during non-operating hours, the owner and Walpole Fire Department are automatically called.

6.01(3). Hot Loads

Hot loads which inadvertently arrive at the entry are managed immediately by on site personnel with assistance from the Walpole Fire Department (911) if needed. Upon arrival, drivers are instructed to immediately contact the RPF office. An assessment will be made to determine the immediate need to notify and request assistance from the Walpole Fire Department.

After appropriate response actions are taken (as determined on a load specific basis) and the load is determined safe, it is unloaded outside the west side of the building. The area is gravel, so should there be any smoldering or burning material discharged, it will be extinguished using fire extinguishers and/or on site soil. If necessary, small amounts of water will also be used to assist in extinguishing any fire or smoldering materials. Once fully extinguished, facility operators will move the material into the building where it will be loaded into a transfer trailer using standard operating procedures. The area impacted by a hot load will also be cleaned to ensure that no residual material, contaminated soil or water is left in the area.

6.01(4). Medical Emergency/Personal Injury

In the event of minor personal injury at the facility, first aid kits will be available at the scale/office and inside the recycling building.

First aid and CPR training will be provided to site employees to assist in the immediate care of burns, needle sticks, regulated medical waste exposure, chemical exposure, and physical injuries.

For non-emergencies, transportation is provided to the Dartmouth Hitchcock Medical Center in Keene, New Hampshire. The contact information and routing to the hospital will be posted at the facility.

For more serious injuries, Mutual Aid Ambulance service will be contacted (911) for immediate instruction and treatment, including transport to the nearest hospital or to another medical treatment facility, if necessary.

Annual training is provided to facility employees regarding procedures for notification of injuries, fires and other emergencies.

6.01(5). Chemical Spills

6.01(5)(a). General Site

Although a major spill of any kind is unlikely, a third party spill response contractor will be called to the facility to manage the clean-up, should one occur. The types of spills that may occur include:

i *Petroleum from a piece of operating equipment or any other vehicle on site.*

In the event that a petroleum-based liquid is accidently spilled from operating equipment or vehicles using the facility, it will be immediately contained, absorbent materials -applied and cleaned up by facility operating personnel.

For spills greater than 25 gallons (or less than 25 gallons if for any reason site personnel are unable to immediately contain) the fire department will be contacted. Personnel will be isolated from the area. Trained personnel will assist and determine clean up required. NHDES will be notified.

ii *Unknown substance from an incoming load*

Facility personnel will immediately secure the area and contact the appropriate local and state personnel and agencies for assistance in determining appropriate procedures for managing the spill.

6.01(5)(b). Unloading/Loading Area – Recycling Building

The RPF recycling building is designed and constructed to fully contain all spills.

There are floor drains in the tipping floor so that any spills and/or any accumulation of liquids are contained in the holding tank. These liquids are co-mingled with the non-recyclable materials and/or absorbents. Spill kits which include speedy dry and other absorbent material are kept inside the building. The holding tank shall be cleaned and containment sent to a disposal center.

The trailer tunnel floor drain is connected to an underground storage tank for collection and temporary storage of liquid. It is equipped with visual alarms, which are activated once the water level reaches the maximum allowable water depth.

Accumulated liquid is monitored and periodically pumped out and transported to a waste treatment facility permitted to treat such liquids.

6.01(6). Unacceptable Waste

If any unacceptable material is encountered, it is separated and removed from the facility by the original hauler. When such material is

encountered, RPF will inform the hauler of other potentially available facilities for its management. If the original hauler is no longer at the facility or cannot be identified, RPF will assume responsibility for the proper disposal of the material as required by solid waste and/or hazardous waste rules.

While unlikely, should asbestos-containing material be inadvertently transported to the facility with C&D debris (e.g., asbestos shingles) it will be segregated and isolated from ongoing activities. RPF will contact outside contractors listed in Section 6.02 to manage the material.

Similarly, outside contractors will be contacted to manage any material that is suspected of being hazardous or otherwise requires special handling.

Should lead-acid batteries be encountered, they will be managed pursuant to the universal Waste Rule (Env-Hw 1100) using procedures described in WMD-HW-18 and WMD-SW-4. They will be managed as follows:

- Stored on pallets inside a metal "overseas" container, out of the weather so they remain dry;
- Placed on the pallet(s) so their electrodes do not come into contact with electrodes of other batteries or metal objects;
- Stored away from sources of sparks or flames; and
- Leaking batteries are separated form non leaking batteries and wrapped in plastic.
- Pallets of batteries will NOT be stacked.

These pallets will be periodically transported to authorized battery recyclers or handlers in compliance with DOT requirements.

Should mercury containing devices (e.g., thermometers, thermostats, switches, relays, etc) be encountered, they will be removed and placed in a small container for temporary storage until transfer off site to an authorized outside contractor.

All facility operating personnel will receive initial and periodic refresher training, which covers at a minimum:

- Acceptable recyclable and non recyclable materials
- Prohibited materials

- The facilities procedures to ensure that identified unacceptable material is managed properly.

6.02. Emergency Contacts

A list of emergency contacts and phone numbers will be posted at the scale house and the recycling building. The contact list will be reviewed at least annually and updated as necessary to ensure it is current. A current list that will be replaced periodically, is found in Appendix D.

Section 7.0. Employee Training Program

This section provides a summary of training procedures for RPF supervisory and operations staff. This training is based on the governing Env-Sw 1600, Solid Waste Operator Training and Certification rules.

7.01. Facility Staffing

Facility operating personnel have obtained certification or interim certification. At least one management/supervisor will be certified as a level IV operator for every one to five operators.

During hours of operation, at least fifty (50) percent of on-site operating personnel directly involved with the management of recyclable and non-recyclable material shall be certified by the DES as solid waste facility operators.

7.02. Supervisory and Operating Personnel Training

Operating staff have completed the Solid Waste Facility Operator Training and Certification Program conducted by the New Hampshire Department of Environmental Services.

The facility provides periodic refresher training to facility operations personnel and requires that employees holding Solid Waste Operator Certifications maintain their certification by participating in annual continuing education workshops offered by DES. These workshops cover a variety of topics associated with solid waste facility operations.

New employees complete initial Employee Orientation throughout their 30 day probationary period while working under the direct and immediate supervision of an experienced member of the facility operational staff. All employees shall be encouraged to become NHDES certified operators as soon as possible.

The training program at RPF will focus on key elements of safe facility operating practices, such as:

- Facility layout and operating equipment
- Work rules and procedures

- Facility permit and operating plan, including:
  - Materials inspection and identification procedures
  - Acceptable and prohibited materials
  - Contingency plan
- Equipment operating procedures and maintenances requirements
- New Hampshire Solid Waste Rules applicable to collection, storage and transfer facilities.

New employees shall register and obtain interim certification as a Solid Waste Facility Operator, (Level I to Level IV) under the New Hampshire Department of Environmental Services Solid Waste Operator Training and Certification Program. The employees retain their interim certification until they have successfully completed the next scheduled NHDES Solid Waste Facility Operator Training Program.

7.03. Documentation of Training

Documentation of operator training is maintained and posted at the administrative office, including copies of Solid Waste Operator Certificates issued by the New Hampshire Department of Environmental Services for facility staff.

Section 8.0. Recordkeeping and Reporting

8.01. Information Compilation

The facility owner will compile and maintain information documenting key aspects of facility operations. Recyclable and non-recyclable quantity information will be obtained as described in section 3.0. Under no circumstances shall the facility exceed its permitted capacity.

All other information compiled will meet the requirements of Env-SW 405.04 (Public benefit) and 1105.06 (Facility Operating Records). The records will be maintained at the facility and will be readily available for NHDES inspection.

8.02. Record Keeping Requirements

The permittee will compile and maintain records, which document facility operations including:

(1) Facility identification by name, street address, municipality and permit number.

(2) Permittee name, address and telephone number.

(3) Identification of all facility operators by name, address, NHDES Operator certificate number, and dates of employment at the facility.

(4) Quantity, type, sources and destination of non-recyclables, recyclables, and MSW received at the facility, more specifically:

- Total quantity of waste that the facility transfers annually to New Hampshire landfills or incinerators.
- Total quantity the facility receives annually from New Hampshire generators.

(5) Quantity, type and destination of the materials generated by the facility, including residuals which are not recycled.

(6) Quantity, type and destination of all certified waste derived products produced by the facility, if any,

(7) Records of inspections, maintenance and repairs.

(8) Records of accidents, fires, violations, remedial and emergency event response actions

(9) Incident reports and record of complaints in accordance with Env-SW 1005.09

(10) Data for all environmental monitoring performed at or for the facility, whether required by the solid waste rules or undertaken voluntarily.

(11) Documentation of all contact with the waste management district(s) served by the facility as required by Env-Sw 1105.12

(12) Other record keeping information and documentation required by Env-Sw 400 (Collection, storage, and Transfer Facility Requirements)

(13) Other information and documentation required by the terms and conditions of the permit and solid waste rules.

RPF will maintain the operating records identified above during the active life of the facility, unless approval is granted or a Type V permit modification pursuant to Env-Sw 315 (g) to relocate or destroy the records. Operating records shall be made available for DES inspection and copies provided to the Department pursuant to Env-Sw 2000 (Inspections).

Following closure of the facility, the operating records will be maintained at a location approved by DES in the Closure Plan, unless destruction of the records is approved pursuant to the provisions of a Type V permit.

8.03. Facility Reporting Requirements

RPF will ensure that the reporting requirements of Env-Sw 303 and Env-Ws 1105.07 (Reporting Requirements) are met and that the annual report for the facility is submitted by March 31 for the prior calendar year. All reporting will be in conformance with Env-Sw 303.03 (Basic Filing Requirements) and Env-Sw 303.04 (Signature Requirements).

Finally, RPF will send a copy of the annual report to the Town of Walpole, Board of Selectmen (as representative for the Walpole Solid Waste Management) in accordance with Env-Sw 1105.12. A cover letter will accompany which explains how RPF met its obligations for providing a substantial public benefit (per Env-Sw 405.04) during the preceding year and which requests the Town/District representatives to identify specific needs which the facility may be able to assist in meeting.

Appendix A:

Site Plan

Appendix B:

Registration of Nondomestic Wastewater Holding Tank

STATE OF NEW HAMPSHIRE

DEPARTMENT OF ENVIRONMENTAL SERVICES
UNDERGROUND INJECTION CONTROL PROGRAM
29 HAZEN DRIVE, PO BOX 95
CONCORD, NEW HAMPSHIRE 03302-0095
(603) 271-2858

HOLDING TANK REGISTRATION FORM

Facility Information

Facility Name: Ruggiero Processing Facility Type of Facility: Solid Waste Collection, Storage & Transfer

Address: 32 Industrial Park Road

City/Town: Walpole State: NH Zip: 03608

E-mail: ruggierotrashremoval@gmail.com

Facility Owner Information

Owner Name: Ruggiero Processing Facility, LLC Phone Number: (802) 869-2235

Mailing Address: P.O. Box 434

City/Town: Saxtons River State: VT Zip: 05157

E-mail: ruggierotrashremoval@gmail.com

Property Owner Information (complete only if different from facility owner)

Owner Name: _____ Phone Number: (___) ___-_____

Mailing Address: _____

City/Town: _____ State: _____ Zip: _____

E-mail: _____

Please describe the wastewater characteristics:

Rain water from dumpsters primarily.

Please describe how the contents of the holding tank will be disposed of.

Brought to the Keene WWTP

Please attach a sketch of the site, showing holding tank location and any other structures on the site. Include a separate locus map or sketch that would allow a person unfamiliar with the site to find it.

To the best of my knowledge, the information I have provided on this form is true and correct. I will notify DES if I do not act according to the intentions I have stated on this form.

Signature of Facility Owner

2/10/15
Date Signed

Appendix C:

Disposal Commitments

INTERSTATE WASTE SERVICES

A GREEN TOMORROW STARTS TODAY.

March 3, 2011

Joe Ruggiero
Ruggiero Trash
P O Box 434
Saxtons River, VT 05154

RE: Ruggiero C&D Processing Facility in Walpole NH
Waste Disposal Options

Dear Ms. Ruggiero:

Moretown Landfill, Inc., (MLF) owns and operates a double synthetic-lined landfill with leachate collection. This facility is conveniently located 1.8 miles off of Interstate 89, Exit #9 in the Town of Moretown, Vermont. MLF maintains permits issued by the State of Vermont Agency of Natural Resources and District #5 Environmental Commission, as well as the Town of Moretown.

In May of 2006, MLF completed construction of Cell 3, providing in excess of 1.5 million cubic yards of disposal airspace. Engineering plans and initial permit applications have been developed for Cell 4, which when permitted, will create upwards of 5 million cubic yards of disposal airspace. MLF is currently permitted to accept 1,000 tons per day of mixed municipal solid (MSW) and construction and demolition (C&D) waste.

MLF currently receives residuals from several Construction and Demolition Waste Processing Facilities. I have no doubt that similar residuals from your Walpole, NH, facility can be permitted into MLF.

If you have any questions concerning MLF and its capabilities to assist you in meeting your waste management needs, please feel free to contact me at 802-244-1100 x226.

Sincerely,

Thomas J. Badowski
General Manager Moretown Landfill

Moretown Landfill • 19 Kaiser Drive, Waterbury, VT 05671 • (802) 244-1100 • Fax: (802) 244-5133
St. Johnsbury Hauling • 548 High Street, P.O. Box 628, St. Johnsbury, VT 05819 • (802) 244-1100 • Fax: (802) 748-1332
Burlington Transfer Station • 1496 Redmond Road, Williston, VT 05495 • (802) 244-1100 • Fax: (802) 872-1698

Printed on Recycled Paper

WINDHAM SOLID WASTE MANAGEMENT DISTRICT

327 OLD FERRY ROAD • BRATTLEBORO, VERMONT 05301
OFFICE (802) 257-0272 • FAX (802) 257-5122
WEBSITE: www.wswmd.org

Brattleboro
Brookline
Dover
Dummerston
Guilford
Halifax
Jamaica
Marlboro
Newfane
Putney
Readsboro
Stratton
Townshend
Vernon
Wardsboro
Westminster
Whitingham
[illegible]ngton
Wi[illegible]all

March 1, 2011

Joe Ruggiero
P.O. Box 434
Saxtons River, Vermont 05154

RE: Recyclable Processing

Dear Mr. Ruggiero:

The Windham Solid Waste Management District owns and operates a dual stream MRF in Brattleboro and has the capacity to process recyclables delivered to the MRF from your transfer station. Please let me know if you need additional information or have questions about the process at the District.

Sincerely,

George C. Murray, Executive Director

SCRAP IT, INC.

716 Rt. 12
Marlborough, NH 03455

03/01/11

To Whom it May Concern,

Scrap It, Inc. will accept from Ruggiero Rubbish removal and Recycling, Scrap Metal materials for recycling. Scrap It, Inc. is a New Hampshire DES permitted facility that collects for recycle, Scrap Metal materials from the General public, Contractors, and Solid Waste Haulers.

Sincerely,

Ralph C. Carbonaro
General Mgr.
Scrap It, Inc.

August 3, 2011

Joseph Ruggiero
Ruggiero Processing Facility
P.O. Box 434
Saxtons River, Vermont 05154

RE: C&D Recycling Facility
Industrial Park Drive
Walpole, NH 03608

Dear Mr. Ruggiero,

Hammond Grinding & Recycling, Inc. will accept C&D from your facility provided the material complies with the terms of Hammond Grinding & Recycling and that you pay the required tipping fee at the time of disposal.

Sincerely,

Fred Hammond VP

Fred Hammond, VP

City of Keene

3 Washington Street New Hampshire 03431

July 18, 2011

Joseph Ruggiero
Ruggiero Processing Facility
P. O. Box 434
Saxtons River, VT 05157

Re: Proposed C&D Recycling Facility
Industrial Park Drive, Walpole, NH

Dear Mr. Ruggiero:

The City of Keene Solid Waste Facility can accept solid waste and/or recyclables from your operation provided the material complies with the terms of the City's permit and you pay the required tipping fee at the time of disposal.

Sincerely,

Duncan Watson
Assistant Public Works Director

Keene, designated as one of America's Dozen Distinctive Destinations by the National Trust for Historic Preservation.

Area Code 603

Phone

Airport 357-9835 • Assessment 352-2125 • City Attorney 357-9806 • City Clerk 352-0133 • Code Enforcement 352-6440 • Facility Maintenance 357-9844 Fleet Services 357-9831 • Fire 357-9861 • Finance 352-1013 • Health 352-5440 • Human Resources 357-9858 • Human Services 357-9809 • Information Management Services 357-9802 • Library 352-0157 • Mayor 357-9804 • Manager 357-9804 • Recycle Center/Transfer Station 352-5739 • Parks, Recreation & Facilities 357-9829 • Planning 352-5474 • Police 357-9815 • Public Works 352-6550 • Purchasing 357-9800 • Revenue Collection 357-9801 Water Treatment Facility 357-8483 • Wastewater Treatment Plant 357-9836 • Water & Sewer 352-3239 • Youth Services 357-9810

FAX

Airport 357-9853 • Assessment 357-9857 • City Clerk 357-9884 • City Hall 357-9847 • Fire 358-3420 • Recycle Center/Transfer Station 357-0106 Revenue Collection 357-9898 • Library 352-1101 • Parks, Recreation & Facilities 357-9859 • Police 357-9823 • Public Works 357-9848 Water Treatment Facility 358-1008 • Wastewater Treatment Plant 357-9854

Website

BELLOWS FALLS WATER TREATMENT PLANT

August 18, 2011

RECEIVED
SEP 1 0 2011

Joseph Ruggiero
Ruggiero Processing Facility
P.O. Box 434
Saxtons River, Vermont 05154

Re: C & D Recycling Facility
Industrial Park Drive
Walpole, NH 03608

Bellows Falls Water Treatment Plant will accept waste water from your facility provided that the material coming from the facility complies with the terms of the Bellows Falls Water Treatment Plant.

Sincerely,

City of Keene

350 Marlboro Street New Hampshire 03431-4373

Keene Wastewater Treatment Plant

August 11, 2011

Mr. Joseph Ruggiero
Ruggiero Processing Facility
PO Box 434
Saxtons River, VT 05157

Dear Mr. Ruggiero,

I have reviewed the Industrial Discharge Agreement application submitted by Ruggiero Processing Facility. The proposed facility will be for processing and recycling of construction and demolition debris. According to the IDA application, the facility proposes to discharge up to 1000 gallons of wastewater every three months at the Keene Wastewater Treatment Plant (WWTP).

The Keene WWTP will be able to accept this waste provided that the following conditions are met:

- The facility must have an adequately-sized oil and grit separator in the drainage line after the floor drain and before the holding tank to pretreat for solids and oils;
- The facility must meet all applicable local industrial pollutant discharge limits and must verify this through testing. Once the facility has begun to accumulate wastewater, contact my office for a list of required parameters to test for;
- NH Department of Environmental Services must approve this discharge through a permit application filed through my office once wastewater analytical results are available.

Note that The City of Keene reserves the right to reject any and all holding tank wastewater that it deems objectionable, for any reason, including, but not limited to, interference with the wastewater treatment process.

A sample will be collected at the Wastewater Treatment Plant (WWTP) each time the wastewater is discharged at the WWTP. If any sample is suspected of containing oil, other petroleum products, or other significant pollutants, the load will be refused and a representative sample will be sent out for analysis. Discharge privileges will be suspended until the results are received and approved.

Area Code 603
Phone
Airport 357-9835 • Assessment 352-2125 • City Attorney 357-9806 • City Clerk 352-0133 • City Manager 357-9804 • Code Enforcement 352-5440 • Earn-It 357-9811 • Facilities Maintenance 357-9844 • Fleet Services 352-6550 • Finance 352-1013 • Fire 357-9861 • Health 352-5440 • Human Resources 357-9858 • Human Services 357-9809 • Information Management Services 357-9802 • Library 352-0157 • Mayor 357-9804 • Parks, Recreation & Facilities 357-9829 • Planning 352-5474 • Police 357-9815 • Public Works 352-6550 • Purchasing 357-9800 • Recycler Center/Transfer Station 352-5739 • Revenue Collection 357-9801 • Water & Sewer 352-6550 • Water & Sewer Billing 352-3239 • Water Treatment Facility 357-8483 • Wastewater Treatment Plant 357-9836 • Youth Services 357-9810

FAX
Airport 357-9853 • Assessment 357-9857 • City Clerk 357-9884 • City Hall 357-9847 • Fire 358-3420 • Fleet Services 352-4879 • Library 352-1101 • Parks, Recreation & Facilities 357-9859 • Police 357-9823 • Public Works 357-9848 • Recycle Center/Transfer Station 357-0106 • Revenue Collection 357-9898 • Water Treatment Facility 358-1008 • Wastewater Treatment Plant 357-9854

Website
www.ci.keene.nh.us

If you have any concerns or questions, feel free to contact me at 357-9836, ext. 6504.

Sincerely,

Eric Swope
Industrial Pretreatment Coordinator

Cc: Rob Hitchcock, SVE Associates
Aaron Costa, Keene WWTP Operations Manager

Appendix D:

Emergency Contacts

Ruggiero Processing Facility	Joseph Ruggiero	(802) 384-0397
Principal Operators	John Ruggiero	(802) 384-0836
Assistant Operator	Joseph Ruggiero III	(802) 384-9992
Ambulance/Fire Police	**Emergency**	**911**
Walpole Fire Department	Non-Emergency	(603) 756-3621
Walpole Police Department	Non-Emergency	(603) 455-2058
County Sherriff Emergency	Cheshire County	(603) 352-4238
Local Hospital	Cheshire Medical Center/Dartmouth Hitchcock Clinic	(603) 354-5400
Poison Control Center	Hanover Poison Center	1-800-562-8236
Spill Response Contractor	Clean Harbors	(603) 224-6626
Spill Response Contractor – Alt.	Enpro Services, Inc.	(603) 410-1150
Asbestos Contractor	Catamount Environmental	(802) 464-2754
State Police (Headquarters)	Emergency	(603) 271-3636
	Emergency – Toll free	(800) 525-5555
	Non-Emergency, Troop C	(603) 358-3333
	Hazardous materials/Petroleum spills	(800) 346-4009
Department of Environmental Services (NHDES)	Emergency Response (Daytime)	(603) 271-3899
	Solid Waste Management Division	(603) 271-2925
	Hazardous Materials Spills	(603)271-3899
Department of Health & Human Services		(603) 357-3510
Homeland Security and Emergency Management		(603) 271-2231
U.S. Environmental Protection Agency (Boston)	Non-Emergency	(888) 372-7341
	Emergency	(800) 424-8802
National Response Center		(800) 424-8802
Federal Emergency Management Agency (Boston)	Boston	(617) 956-7506

Appendix E:

Access Agreement

over land of

Hodgkins and Sons, Inc.

Access Agreement

between

Hodgkins and Sons, Inc. and Ruggiero Processing Facility, LLC

Let it be known that from this day forth, unless otherwise agreed to by both parties, Hodgkins and Sons Inc. grants to Ruggiero Processing Facility, LLC., the right to pass and repass over land of Hodgkins, Walpole tax map 1, lot 10, for the purpose of accessing Ruggiero Processing Facility land, Walpole tax map 1, lot 10-1. Such access is shown on an exhibit titled Access Agreement between Hodgkins and Sons, Inc. and Ruggiero Processing Facility, LLC, dated January ??, 2015 prepared by SVE Associates. Said access shall be used as desired by Ruggiero in the operation of Ruggiero Processing Facility, LLC.

As Ruggiero has sufficient legal frontage for an approved driveway of his own, and because the driveway currently used by Ruggiero is existing, and also used by Hodgkins, this agreement is for the convenience of Ruggiero and thus, can be terminated by Hodgkins at will, with no justification necessary, provided 90 days advance written notice is given to Ruggiero.

Agreed to this date by:

John A. Hodgkins — 1/26/2015

John Hodgkins for Hodgkins and Sons, Inc. — date

Joseph Ruggiero — 1/26/15

Joseph Ruggiero for Ruggiero Processing Facility, LLC. — date

Subscribed and sworn before me this 26th day of January _____, 2015.

Notary Public: Joanne Perry

My commission expires: 2/10/15

JOANNE L. PERRY
Notary Public, State of Vermont
My Commission Expires Feb. 10, 2015

p:\project\k1998 ruggiero rubbish removal\docs\application jan 2015\access agreement.docx

Ruggiero Processing Facility

Section VIII

Closure Plan

Permit No. DES-SW-SP-12-001

Prepared for:

Ruggiero Processing Facility, LLC

P.O. Box 434

Saxtons River, VT 05154

November 2010

Revised thru February 2, 2015

Table of Contents

Section 1.0 Facility Information 3

Section 2.0 Closure Schedule 3

Section 3.0 Waste Identification 4

3.1. Authorized Material 4

3.2. Unauthorized Material 5

Section 4.0 Notifications 5

Section 5.0 Closure Requirements 6

5.1. Recyclable, Non Recyclables, and MSW Removal 6

5.2. Equipment Removal and Decommissioning 6

5.3. Facility Cleanup 6

Section 6.0 Post-Closure Requirements 7

Section 7.0 Recordkeeping and Reporting 7

7.1. Closure Reporting 7

7.2. Recordkeeping 7

Section 8.0 Other Closure Permits 8

Section 9.0 Closure Cost Estimate 8

Appendix A: Financial Assurance Plan and Closure Cost Estimate 9

Section 1.0 Facility Information

The Facility name, location, mailing address and property owner are as follows:

Name:	RUGGIERO PROCESSING FACILITY
Location:	32 Industrial Park Drive, Walpole, NH
Mailing Address:	Ruggiero Processing Facility, LLC P.O. Box 434 Saxtons River, VT 05157

Section 2.0 Closure Schedule

This Schedule is based on the RUGGIERO PROCESSING FACILITY's operation as a commercial C&D and recycling facility. With regular maintenance and refurbishment of operating equipment, RFP expects to continue operations indefinitely. However, closure procedures will be initiated when one or more of the conditions of Env-Sw 1006.01 exist. These include:

- RUGGIERO PROCESSING FACILITY's operating permit is expired or revoked.
- RUGGIERO PROCESSING FACILITY ceases operations for any reason.
- Facility sustains irreparable damage.
- Environmental conditions exist that threaten human life or safety or threaten the environment in a way that cannot be remediated.
- Facility is issued an administrative or judicial order to cease operations.

Closure will be completed within sixty (60) days of cessation of operations. The closure will occur according to the following schedule:

30 days prior to Day 1:

- File a *Notice to Close* with the New Hampshire Department of Environmental Services (NHDES), Waste Management Division.
- File notice with NHDES Drinking Water and Groundwater Bureau regarding decommissioning of the Holding Tank.

Day 1 to day 20:

Empty and rinse/clean liquid holding tank. Transfer all recyclables, non-recyclable, and MSW materials to an authorized disposal facility.

Day 21 to day 55

Decommission and remove facility equipment (i.e.: dumpsters, vehicles, etc) so that it can be used at another facility or sold. Clean the building, sweep concrete surfaces and clean surrounding gravel parking and adjacent areas.

Day 56 to day 60

Prepare and submit the notification to the New Hampshire Department of Environmental Services that the closure is complete.

Section 3.0 Waste Identification

Section 2 of the Ruggiero Processing Facility Operating Plan describes the materials authorized and prohibited for management at the facility. These Include:

3.1. Authorized Waste

- Recyclable materials including glass, aluminum, steel cans, paper, high density polyethylene (HDPE) and polyethylene terephthalate (PET) plastics, and metal, as defined by Env-Sw 104.19; and
- Construction/Demolition debris as defined by Env-Sw 102.42.

- Municipal Solid Waste, MSW, as defined by Env-Sw 103.46.

3.2. Prohibited Materials

- Hazardous waste;
- Sludge or septage waste;
- Asbestos waste;
- Infectious waste;
- Contained gaseous waste;
- Universal waste batteries (except for incidental lead-acid batteries);
- 55-gal drums or other liquid containers (except for five gallon or less empty containers incidental to the load);
- Explosives;
- Ash;
- Mercury containing devices;
- Liquid waste; and
- Other wastes not authorized by condition 6 of the Permit.

Section 4.0 Notifications

At least 30 days prior to the cessation of facility operations, the RUGGIERO PROCESSING FACILITY will provide written notification, including notice of the planned date of facility closure, to the following in accordance with the New Hampshire Solid Waste Rules:

- All users of the facility
- Town of Walpole
- NHDES – Waste Management Division
- NHDES – Drinking Water and Groundwater Bureau

The notice will be posted at the scale office and will include a final date for the receipt of recyclables, non-recyclables, and MSW at the facility.

Section 5.0 Closure Requirements

Closure will be in conformance with this facility closure plan, Env-Sw 406, Env-Sw 1006 and Env-Sw 1106.

At the Specified closure date, receipt of recyclables, non-recyclables, and MSW will cease. At that time, the three activities described in sections 5.1, 5.2 and 5.3 of this closure plan will commence. Upon completion of the activities, the facility will be closed.

5.1. Recyclable, Non Recyclables and MSW Removal

Within 20 days following the last day of facility operations, all recyclables and non-recyclable material on site will be removed (*see section 2.0 – Closure Schedule*).

- All recyclables will be transported to authorized reclamation facilities and/or secondary markets.
- All remaining non-recyclable/residual material and MSW will be transported to authorized disposal facilities in accordance with New Hampshire Solid Waste Rules.
- The liquids holding tank will be emptied and rinsed; wastewater will be transported off site to a local authorized wastewater treatment facility.

No revenue from the sale of any recyclables stored on site at the time of closure have been assumed nor considered in the closure cost estimate prepared for this plan.

5.2. Equipment Removal and Decommissioning

Upon completion of recycling activities at the facility, all operating equipment (i.e., heavy operating equipment, excavators, baler) will be removed, sold or reallocated (in a commercial business separate from the recycling operation). The scale and liquids holding tank will be cleaned and left on site for subsequent use by a new owner/operator.

No salvage value has been assumed nor considered in the closure cost estimate prepared for this plan.

5.3. Facility Cleanup

Following the removal of materials from the facility, the building will be cleaned and any contamination to its approximate original

condition of cleanliness. Facility signage will be removed. Any water which is stored in the holding tank and utilized in this cleaning effort will be absorbed by absorbent materials and/or collected and disposed of at a permitted wastewater treatment facility.

Section 6.0 Post-Closure Requirements

The RUGGIERO PROCESSING FACILITY will process and recover recyclables and manage recyclables, non-recyclables, and MSW by transfer to authorized facilities during its operating life.

When facility operations cease, the closure plan activities described in Section 5 of this closure plan will assure that the facility will not adversely affect the environment, public health or safety. As a result, post closure monitoring, testing, inspection and maintenance of the facility following completion of facility closure will not be performed and post closure reporting will not take place, (*unless required by local, state or federal regulations*).

Section 7.0 Recordkeeping and Reporting

7.1. Closure Reporting

Following completion of closure activities described in Section 5 of this closure plan, RUGGIERO PROCESSING FACILITY will provide written notice to the Town of Walpole and NHDES – Waste Management Division that closure has been completed.

RUGGIERO PROCESSING FACILITY will submit a final annual facility report to the NHDES Waste Management Division by March 31 of the year following closure, pursuant to reporting requirements described in Env-Sw 1105.07(b).

7.2. Recordkeeping

Following closure of the facility, all records regarding the facility operation and closure will be retained at the RUGGIERO PROCESSING FACILITY's principal place of business at Industrial Road in Walpole, NH or as otherwise specified in the facility closure report.

Section 8.0 Other Closure Permits

No other permits or compliance related activities are required to implement facility closure.

Section 9.0 Closure Cost Estimate

A closure cost estimate for the RUGGIERO PROCESSING FACILITY was prepared in accordance with this closure plan and criteria in Env-Sw 1403.02 and included as a part of the closure plan. The following criteria were used when preparing the estimate.

- An assumption that maximum combined volume of non-recyclable and MSW materials in storage is 45 tons.
- An assumption of a maximum of 1,000 gallons of liquids are stored in the liquid holding tank and an additional 500 gallons of rinse water to clean.
- The liquid holding tank will be left on site.
- Current market rates for having third party perform all closure activities.
- The estimate considers a point in the facilities active life when the extent and manner of operations and compliance with applicable laws and rules make closure the most expensive.
- The value of on site recyclables was not considered or used to reduce the cost estimate of closure.
- Salvage value from the sale of facility structures, equipment or other assets associated with the facility were not used to reduce the cost estimate of closure.
- A contingency in the amount of 10% of the total itemized costs was included.

The financial assurance plan will include a letter of credit and standby trust agreement in a form previously accepted by the NHDES. Following approval of the proposed permit application, the closure cost estimate will be updated on an annual basis, consistent with current New Hampshire Solid Waste Rules.

Appendix A to this closure plan presents the Standby Trust Agreement and closure cost estimate prepared for the RUGGIERO PROCESSING FACILITY.

Appendix A: Financial Assurance Plan and Closure Cost Estimate

Cost Estimate Form for Closure of Solid Waste Collection/Storage/Transfer Facilities or Recycling Facilities

Facility Name: Ruggi[illegible] Processing Facility, LLC	
Address: PO Box 434	
Saxtons River, VT 05157	
DES Permit #: DES-SW-SP-12-001	

State of New Hampshire
Department of Environmental Services
Waste Management Division, Solid Waste Management Bureau
29 Hazen Drive, PO Box 95, Concord, NH 03302-0095
PHONE (603) 271-2925 FAX (603) 271-2456 EMAIL solidwasteinfo@des.nh.gov
TDD Access: Relay NH 1-800-735-2964

Complete this form in accordance with the NH Solid Waste Rules Part Env-Sw 1400.

Permitted Material	Permitted Amount	Quantity[1] SPR[2]	Quantity[1] Non-SPR[2]	Unit	Loading Cost Per Unit (Non-SPR)	Transp. Cost Per Unit (Non-SPR)	Disposal Cost Per Unit (Non-SPR)	Total Cost Per Unit (Non-SPR)	Total Cost	Disposal Destination
Ash				Ton						
Bulky Waste/White Goods				Ton						
Bypass/Residual Waste				Ton						
C & D Debris				Ton						
CFC Containing Appliances				Ton						
Chemicals/Hazardous/Universal Wastes-Liquid				Gallon						
Contaminated Soil/Media				Ton						
E-Scrap/CRTs				Ton						
Hazardous/Universal Wastes-Solid				Ton						
Leachate				Gallon						
Mixed MSW/MSW/Non-Recyclable Wastes for Disposal			60	Ton	$25	$40	$90	$155	$9,300	Keene Transfer Station
Non-Metal Unprocessed Recyclable Waste			12	Ton	$25	$40	$70	$135	$1,620	Hammonds Grinding & Recycling
Tires				Ton						
Unprocessed Waste				Ton						
Unprocessed Recyclables-Commingled				Ton						
Other: (list) Processed Recyclables		60		Ton					$0	Hammonds Grinding & Recycling
										sale of processed recyclables
										offsets cost of disposal

Site Cleanup (per approved closure plan)	Description of Work to be Performed		Name of Third Party Providing Estimate
Labor	miscellaneous	$1,000	SVE Associates
Equipment Decommissioning	sell or scrap excavator, no disposal cost	nc	SVE Associates
Equipment Removal	sell or scrap dumpsters, no disposal cost	nc	SVE Associates
Building Cleaning	powerwash walls and slab	$1,000	SVE Associates
Regrading			
Hydroseeding			
Other:	holding tank to be pumped out	$500	SVE Associates
Miscellaneous Closure Work			
Administrative	legal fees	$4,000	SVE Associates
Other:	miscellaneous	$1,420	SVE Associates

Subtotal	$18,840.00
10%Contingency	$1,884.00
Total *	$20,724.00
GRAND TOTAL	$20,724.00

* Add the costs for qualified professional oversight of all closure activities if the total closure cost estimate is more than $50,000.

[1] Note: The combined Quantity of Select Processed Recyclables (SPR) and Non-SPR must equal the maximum permitted storage capacity.

[2] A (SPR) is a recyclable material (a material comprised of one of the following materials: paper, cardboard, glass, plastic, ferrous metal, non-ferrous metal, or textile materials) which has been physically sorted and separated by material type, formed into bales or otherwise physically processed and packaged in a manner satisfying the specifications for transportation to and acceptance by a market that will use the material for the production of certified waste-derived products.

This closure cost estimate has been figured based on representative current market rates for having a third party perform all required closure and post-closure activities at the point in the facility's active life when the extent and manner of facility operations in compliance with permit conditions and applicable laws and rules makes closure the most expensive, as indicated by the approved facility closure plan.

Signature of Preparer: [illegible] Date: 2/2/2015 Signature of Permittee: [illegible] Date: 2/2/15

Date of Last Form Revision: 7/1/14

SPR - select processed recyclable

Type 1A Modification to Solid Waste Management Facility Permit
Ruggiero Processing Facility, LLC

Section VII – Public Benefit Demonstration Responses

Per RSA 149-M:11

III. The department shall determine whether a proposed solid waste facility provides a substantial public benefit based upon the following criteria:

(a) The short and long term need for a solid waste facility of the proposed type, size, and location to provide capacity to accommodate solid waste generated within the borders of New Hampshire, which capacity need shall be identified as provided in paragraph V.

Ruggiero's goal is to collect MSW and recycle. He intends to offer his customers a service not offered by others in the Monadnock region; single pass collection. By having all trash and recyclables collected in plastic bags, the recyclables in a different color from the trash, he will be able to make one stop a week at every customers, as opposed to the 2 stop method employed by others currently. This will save Ruggiero on the cost of collection, fuel, and trucking. It will save the homeowner or business owner from having to "put out the trash" or recyclables, twice a week.

Ruggiero charges by the bag he must landfill. There is no charge for bags of recyclables, therefore, the more a customer recyclables the more money they can save on collection and disposal.

(b) The ability of the proposed facility to assist the State in achieving the implementation of the hierarchy and goals under RSA 149-M:2 and RSA 149-M:3.

By introducing the single pass system and charging by the bag for non-recyclables Ruggiero hopes to reduce the hassle of solid waste disposal and encourage recycling, thus prolonging the lifespan of those facilities we already have and those we will have in the future.

(c) The ability of the proposed facility to assist in achieving the goals of the State solid waste management plan, and one or more solid waste management plans submitted to and approved by the department under RSA 149-M:24 and RSA 149-M:25

The proposed modification allows Ruggiero to collect and transfer MSW at his Facility. The result will be an increase in recyclables, reduced traffic, reduced vehicles emissions, reduced carbon footprint.

IV. The department shall also consider as part of its public benefit determination:

(a) The concerns of the citizens and governing bodies of the host municipality, county, and district and other affected persons.

Mr. Ruggiero has had a brief conversation with the Walpole Board of Selectmen and with the Town's Transfer Station/Recycling Center supervisor. Neither have raised any concern or objection to the proposed receipt, repackaging, and disposal of MSW.

We understand the need and requirement for a public hearing and will host such a hearing once NHDES feels this application is complete. At this point the neighbors are probably not aware of the proposal to receive MSW. There have been no concerns raised to date by the neighbors that we are aware of relative to the C&D operation.

(b) The economic viability of the proposed facility, including but not limited to, its ability to secure financing.

The facility is currently open to receive C&D and recyclables. The facility is operational, and profitable today. No additional construction is needed at this time. Additional bank funding is not required. We are not aware of any forth coming changes or legislation that will alter the economic status of the facility.

V. In order to determine the State's solid waste capacity need, the department shall:

(a) Project, as necessary, the amount of solid waste which will be generated within the borders of New Hampshire for a 20 year planning period. In making these projections the department shall assume that all unlined landfill capacity within the state is no longer available to receive solid waste.

Ruggiero does not have the data on solid waste generated each year across the State to be able to answer this question with any level of acccuracy.

(b) Identify the types of solid waste which can be managed according to each of the methods listed under RSA 149 M:3 and determine which such wastes will be received by the proposed facility.

The types of solid waste to be received by the Facility shall include recyclables, C&D materials and MSW. Charging by the bag will give the customer incentive to recycle more, thus reducing the waste to be landfilled. Ruggiero is considering a composting facility in the near future.

(c) Identify, according to type of solid waste received, all permitted facilities operating in the state on the date a determination is made under this section.

The permitted facilities that could receive solid waste from the Ruggiero Processing Facility includes the Keene Recycling and Transfer Center; Monadnock Trash Disposal, Jaffrey; Casella Waste Systems, Newport; and Naughton and Sons, Bradford.

(d) Identify any shortfall in the capacity of existing facilities to accommodate the type of solid waste to be received at the proposed facility for 20 years from the date a determination is made under this section. If such a shortfall is identified, a capacity need for the proposed type of facility shall be deemed to exist to the extent that the proposed facility satisfies the need.

The only shortfall known to the applicant is the willingness of competitors in the business to offer single pass collection which Ruggiero strongly believes will increase the level of recycling.

SOLID WASTE PERMIT NOTES:

1. PERMIT #DES-WS-SP-12-001.
2. FACILITY TYPE: THIS FACILITY SHALL SERVE AS A COLLECTION, STORAGE, AND TRANSFER FACILITY, IN ACCORDANCE WITH THE PROVISIONS OF ENV-SW 400 OF THE RULES, FOR SOLID WASTE AS SPECIFIED IN CONDITIONS (3) AND (4) BELOW.
3. SERVICE TYPE AND AREA: THIS FACILITY IS A COMMERCIAL FACILITY WITH AN UNLIMITED SERVICE AREA, SUBJECT TO PROVIDING CAPACITY FOR NEW HAMPSHIRE GENERATORS PURSUANT TO THE REQUIREMENTS OF CONDITION #12 OF THE PERMIT.
4. AUTHORIZED WASTES: THE PERMIT AUTHORIZES THE FACILITY TO ACCEPT THE FOLLOWING TYPES OF SOLID WASTE, EXCEPT IF RESTRICTED AS UNAUTHORIZED WASTES:
   - A. RECYCLABLE MATERIALS, INCLUDING GLASS, ALUMINUM, STEEL CANS, PAPER, HIGH DENSITY POLYETHYLENE (HDPE) AND POLYETHYLENE TEREPHTHALATE (PET) PLASTICS, AND METAL, AS DEFINED BY ENV-SW 104.19,
   - B. CONSTRUCTION AND DEMOLITION DEBRIS, AS DESIGNED BY ENC-SW 102.42,
   - C. MUNICIPAL SOLID WASTE.
5. UNAUTHORIZED WASTES: THE PERMIT DOES NOT AUTHORIZE THE FACILITY TO ACCEPT THE FOLLOWING TYPES OF WASTE:
   - A. HAZARDOUS WASTE;
   - B. SLUDGE OR SEPTAGE WASTE;
   - C. ASBESTOS WASTE;
   - D. INFECTIOUS WASTE;
   - E. CONTAINED GASEOUS WASTE;
   - F. UNIVERSAL WASTE BATTERIES (EXCEPT FOR INCIDENTAL LEAD-ACID BATTERIES;
   - G. 55-GALLON DRUMS OR OTHER LIQUID CONTAINERS (EXCEPT FOR 5-GALLON OR LESS EMPTY CONTAINERS INCIDENTAL TO THE LOAD);
   - H. EXPLOSIVES;
   - I. ASH;
   - J. MERCURY CONTAINING DEVICES;
   - K. LIQUID WASTE; AND
   - L. OTHER SOLID WASTES NOT AUTHORIZED.
6. FACILITY CAPACITY: THE APPROVED CAPACITY OF THIS FACILITY SHALL BE:
   - A. THE AVERAGE WEEKLY TONNAGE RECEIVED AT THE FACILITY DURING ANY QUARTER SHALL NOT EXCEED 400 TONS,
   - B. MAXIMUM WASTE STORED ON SITE = 132 TONS,
   - C. THE MAXIMUM QUANTITY OF UNPROCESSED RECYCLABLE MATERIALS STORED AT THE FACILITY SHALL NOT EXCEED 12 TONS;
   - D. THE MAXIMUM QUANTITY OF NON-RECYCABLE WASTE STORED AT THE FACILITY SHALL NOT EXCEED 60 TONS;
   - E. THE MAXIMUM QUANTITY OF MUNICIPAL SOLID WASTE STORED AT THE FACILITY SHALL NOT EXCEED 60 TONS; AND
   - F. THE FACILITY CAPACITY SHALL NOT EXCEED THE QUANTITY OF WASTE WHICH THE FACILITY IS ABLE TO MANAGE IN A SAFE AND ENVIRONMENTALLY PROTECTIVE MANNER.

ZONING: INDUSTRIAL DISTRICT

1. AN INDUSTRY SHALL BE LOCATED AT LEAST 85' FROM THE CENTER LINE OF ANY RIGHT-OF-WAY AND NOT LESS THAN TWENTY FEET FROM EACH SIDE OR REAR BOUNDARY.
2. AN INDUSTRY MUST PROVIDE ADEQUATE OFF STREET PARKING AND LOADING FACILITIES FOR FREIGHT AND DELIVERY TRUCKS, EMPLOYEE'S AND CUSTOMER'S PARKING.
3. AN INDUSTRY MUST OBTAIN A PERMIT FOR ITS ESTABLISHMENT FROM THE BOARD OF ADJUSTMENT AFTER THE BOARD HAS HAD A RECOMMENDATION FROM THE PLANNING BOARD AND IS SATISFIED THAT THE INDUSTRY SHALL NOT OFFEND AT THE LOCATION SELECTED BY REASON OF EMISSION OF SMOKE, DUST, NOISE, ODOR, FUMES OR WATER POLLUTION.

PROJECT SPECIFIC NOTES:

1. A HOLDING TANK WILL COLLECT ANY STORMWATER RUNOFF IN THE WASTE AREA. THE TANK WILL BE PUMPED AS NEEDED AND IS FITTED WITH FLOAT ALARMS IF FILLED.
2. FOR NH DIVISION OF LABOR STANDARD LAB 1403.28(a) THE FACILITY SHALL HAVE A PORTABLE OUTHOUSE AND A WATER COOLER WITH POTABLE WATER FOR EMPLOYEE USE.
3. A FACILITY SIGN SHALL BE INSTALLED AT THE ENTRANCE TO THE SITE WITH INFORMATION LISTED IN ENV-Sw 1105.05.
   - 3.1. THE FACILITY NAME AND PERMIT NUMBER;
   - 3.2. THE NAME, ADDRESS AND TELEPHONE NUMBER OF THE PERMITTEE;
   - 3.3. THE DAYS AND HOURS THAT THE FACILITY WILL BE OPEN TO RECEIVE WASTE;
   - 3.4. THE TYPE OF WASTES ACCEPTED; AND
   - 3.5. A STATEMENT THAT UNLAWFUL DUMPING WILL BE SUBJECT TO FINE AND PROSECUTION

N

SEE NOTE 1

Plan References

REFERENCES INCLUDE ALL INFORMATION REFERRED TO ON ANY OF THE FOLLOWING PLANS:

1. TWO LOT SUBDIVISION, LAND OF HODGKINS AND SONS, INC, LOCATED AT TAX MAP 1, LOT 10, INDUSTRIAL PARK ROAD, WALPOLE, NH,DATED SEPTEMBER 158, 2009; BY RUSSELL J. HUNTLEY, SVE ASSOCIATES.
2. SITE PLAN FOR C&D DEBRIS RECYCLING PREPARED BY SVE ASSOCIATES DATED 10-12-2010 ON FILE AT SAID OFFICE.
3. BOUNDARY LINE ADJUSTMENT , BETWEEN LANDS OF HODGKINS & SONS, INC. AND RUGGIERO PROCESSING FACILITY, LLC, DATED MAY 1, 2014, BY RUSSELL J. HUNTLY, SVE ASSOCIATES.

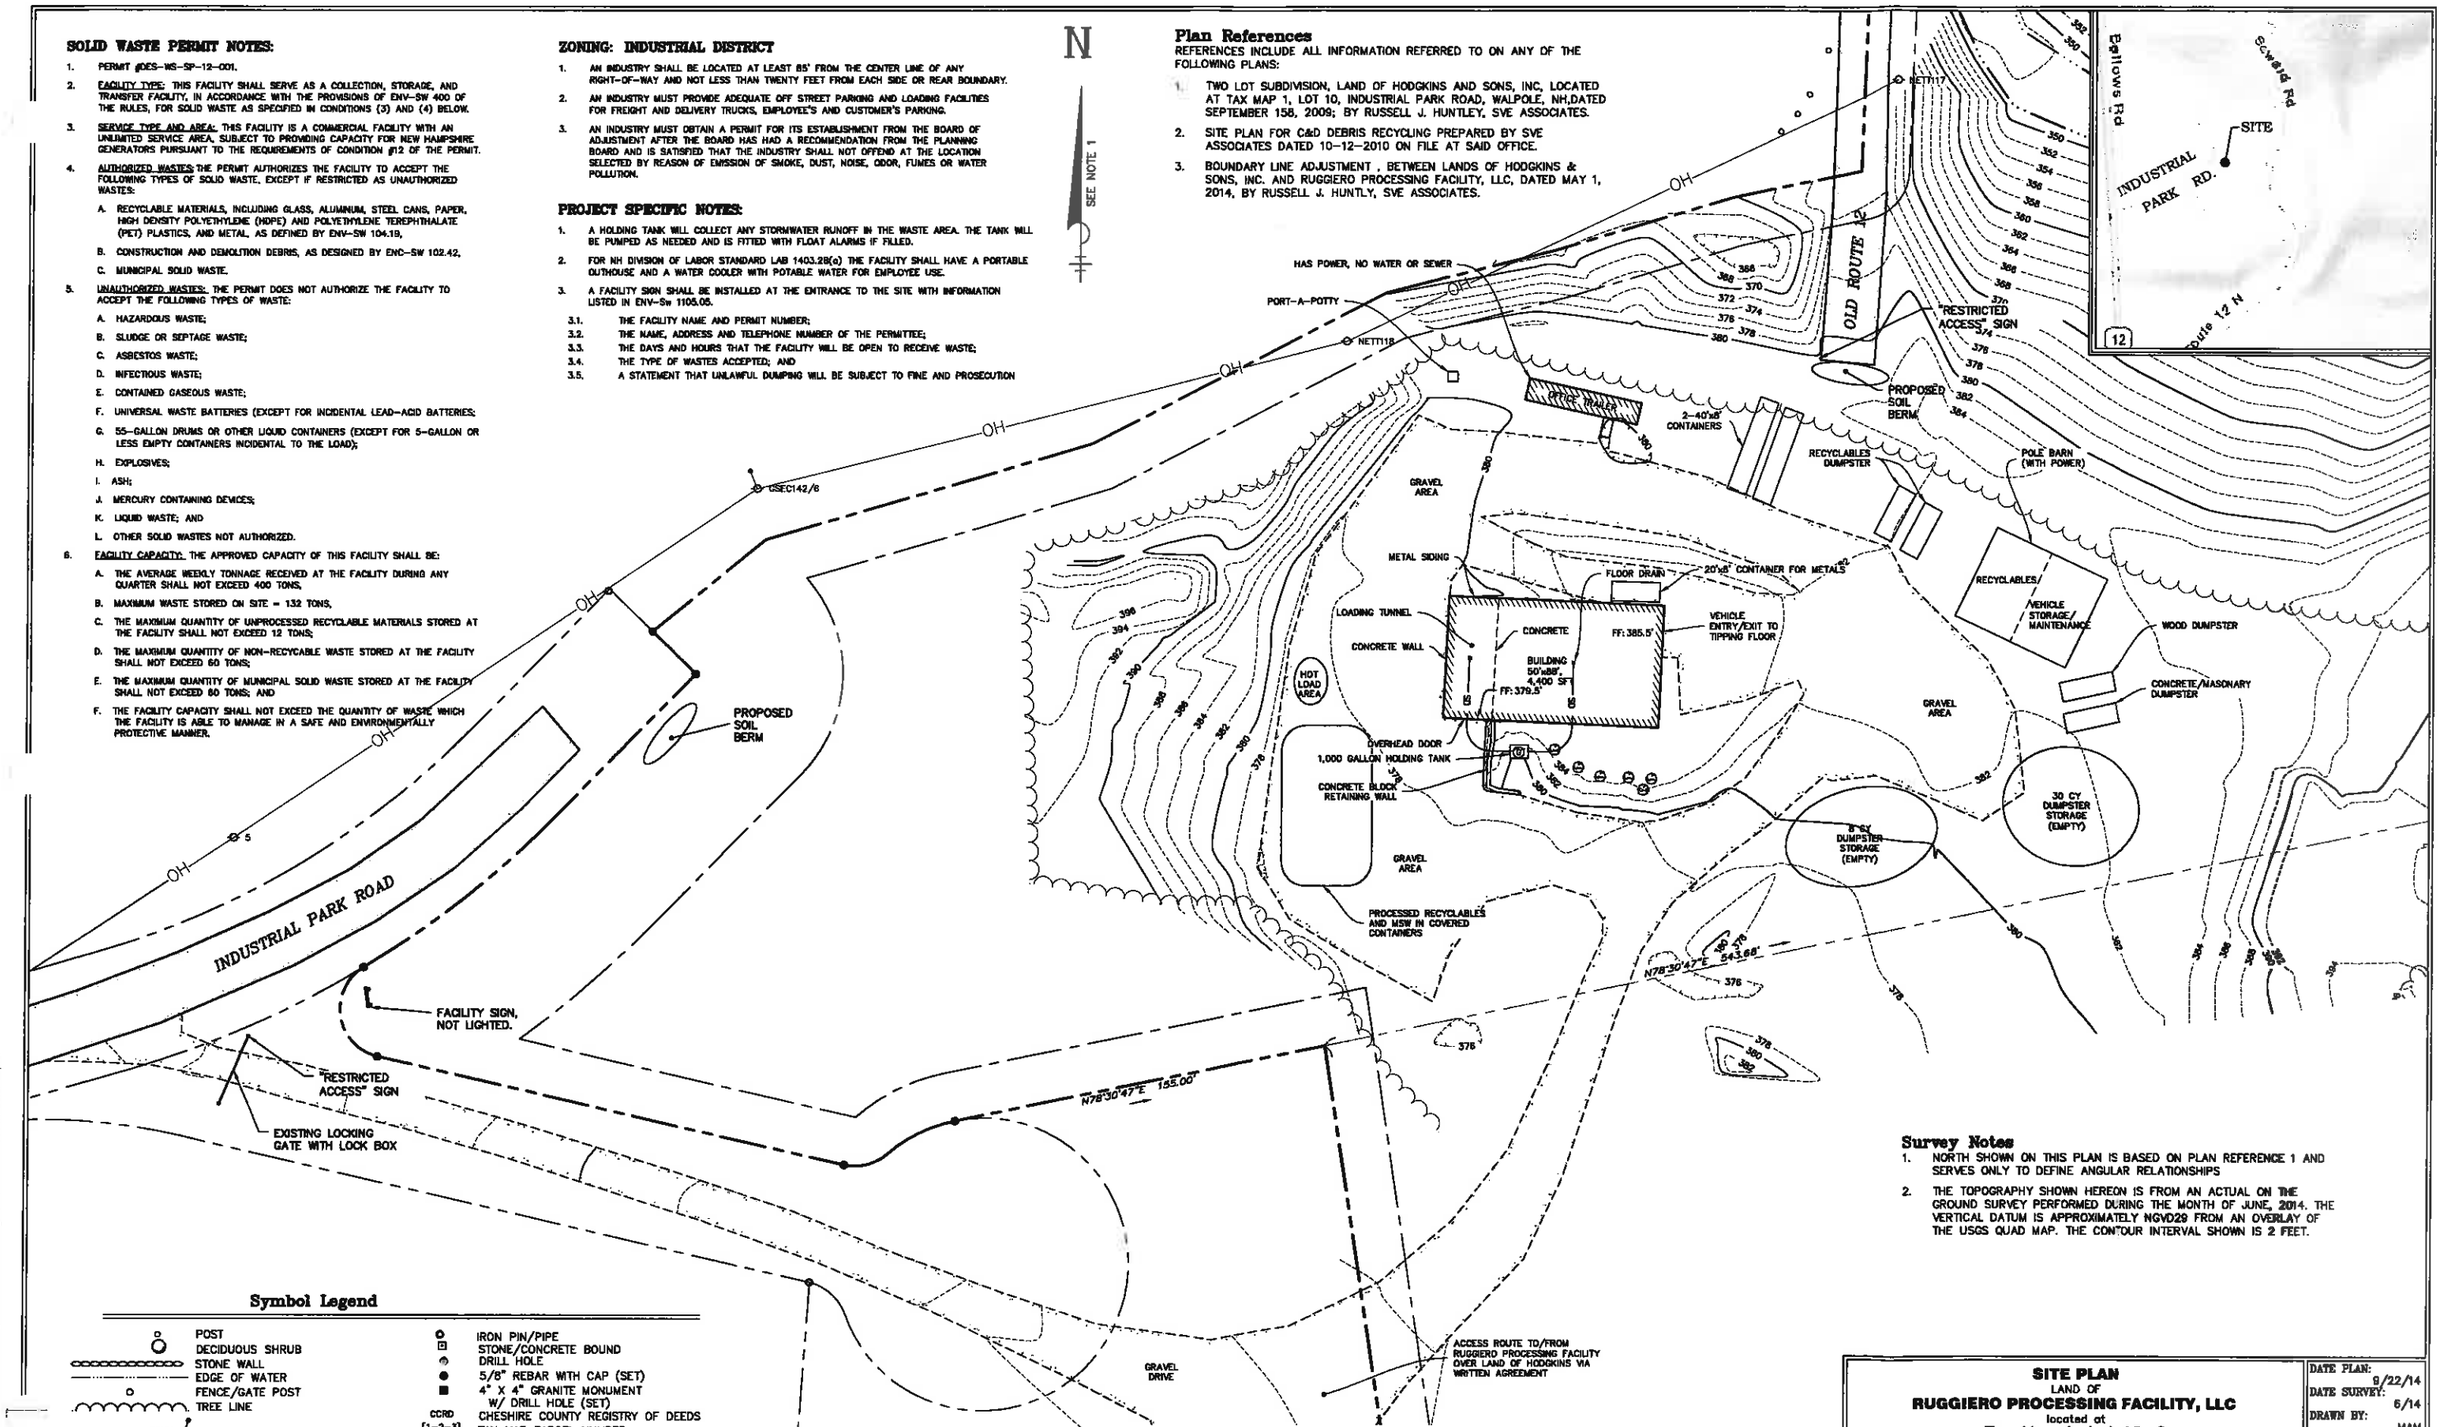

Survey Notes

1. NORTH SHOWN ON THIS PLAN IS BASED ON PLAN REFERENCE 1 AND SERVES ONLY TO DEFINE ANGULAR RELATIONSHIPS
2. THE TOPOGRAPHY SHOWN HEREON IS FROM AN ACTUAL ON THE GROUND SURVEY PERFORMED DURING THE MONTH OF JUNE, 2014. THE VERTICAL DATUM IS APPROXIMATELY NGVD29 FROM AN OVERLAY OF THE USGS QUAD MAP. THE CONTOUR INTERVAL SHOWN IS 2 FEET.

Symbol Legend

- POST
- DECIDUOUS SHRUB
- STONE WALL
- EDGE OF WATER
- FENCE/GATE POST
- TREE LINE
- PSNH 1 2 — UTILITY POLE W/GUY WIRES, OVERHEAD LINES AND NUMBERS
- BURIED PROPANE
- IRON PIN/PIPE
- STONE/CONCRETE BOUND
- DRILL HOLE
- 5/8" REBAR WITH CAP (SET)
- 4" X 4" GRANITE MONUMENT W/ DRILL HOLE (SET)
- CCRD — CHESHIRE COUNTY REGISTRY OF DEEDS
- [1-2-3] — TAX MAP PARCEL NUMBER
- 123/456 — DEED VOLUME & PAGE
- ROW — ROAD RIGHT OF WAY
- NTS — TO TO SCALE
- FF — FINISH FLOOR
- CONC — CONCRETE SURFACE/PAD

GRAPHIC SCALE

30 0 15 30 60 120

(IN FEET)
1 inch = 30 ft.

NO.	DATE	REVISION	BY
3	2/2/15	MISCELLANEOUS	LPS
2	12/3/14	SIGNS & GATES	LPS
1	10/6/14	MISCELLANEOUS	LPS

SITE PLAN
LAND OF
RUGGIERO PROCESSING FACILITY, LLC
located at
Tax Map 1, Lot 10-2
32 Industrial Park Road, Walpole, Cheshire County, New Hampshire

SVE Associates
© 2015
Engineering Surveying Landscape Architecture Planning
47 Marlboro St., Keene, NH 03431 Phone (603) 355-1532 Fax (603) 355-2988
website: www.sveassoc.com

DATE PLAN: 9/22/14
DATE SURVEY: 6/14
DRAWN BY: MAM
CHECKED BY: RH
SCALE: 1"=30'
PROJ. NO. K1998
CAD FILE NO. K1998 SITE 2014

P:\project\K1998 Ruggiero Rubbish Removal\Dwg\K1998 SITE 2014.dwg 2/10/2015 3:06:00 PM, Color Copier

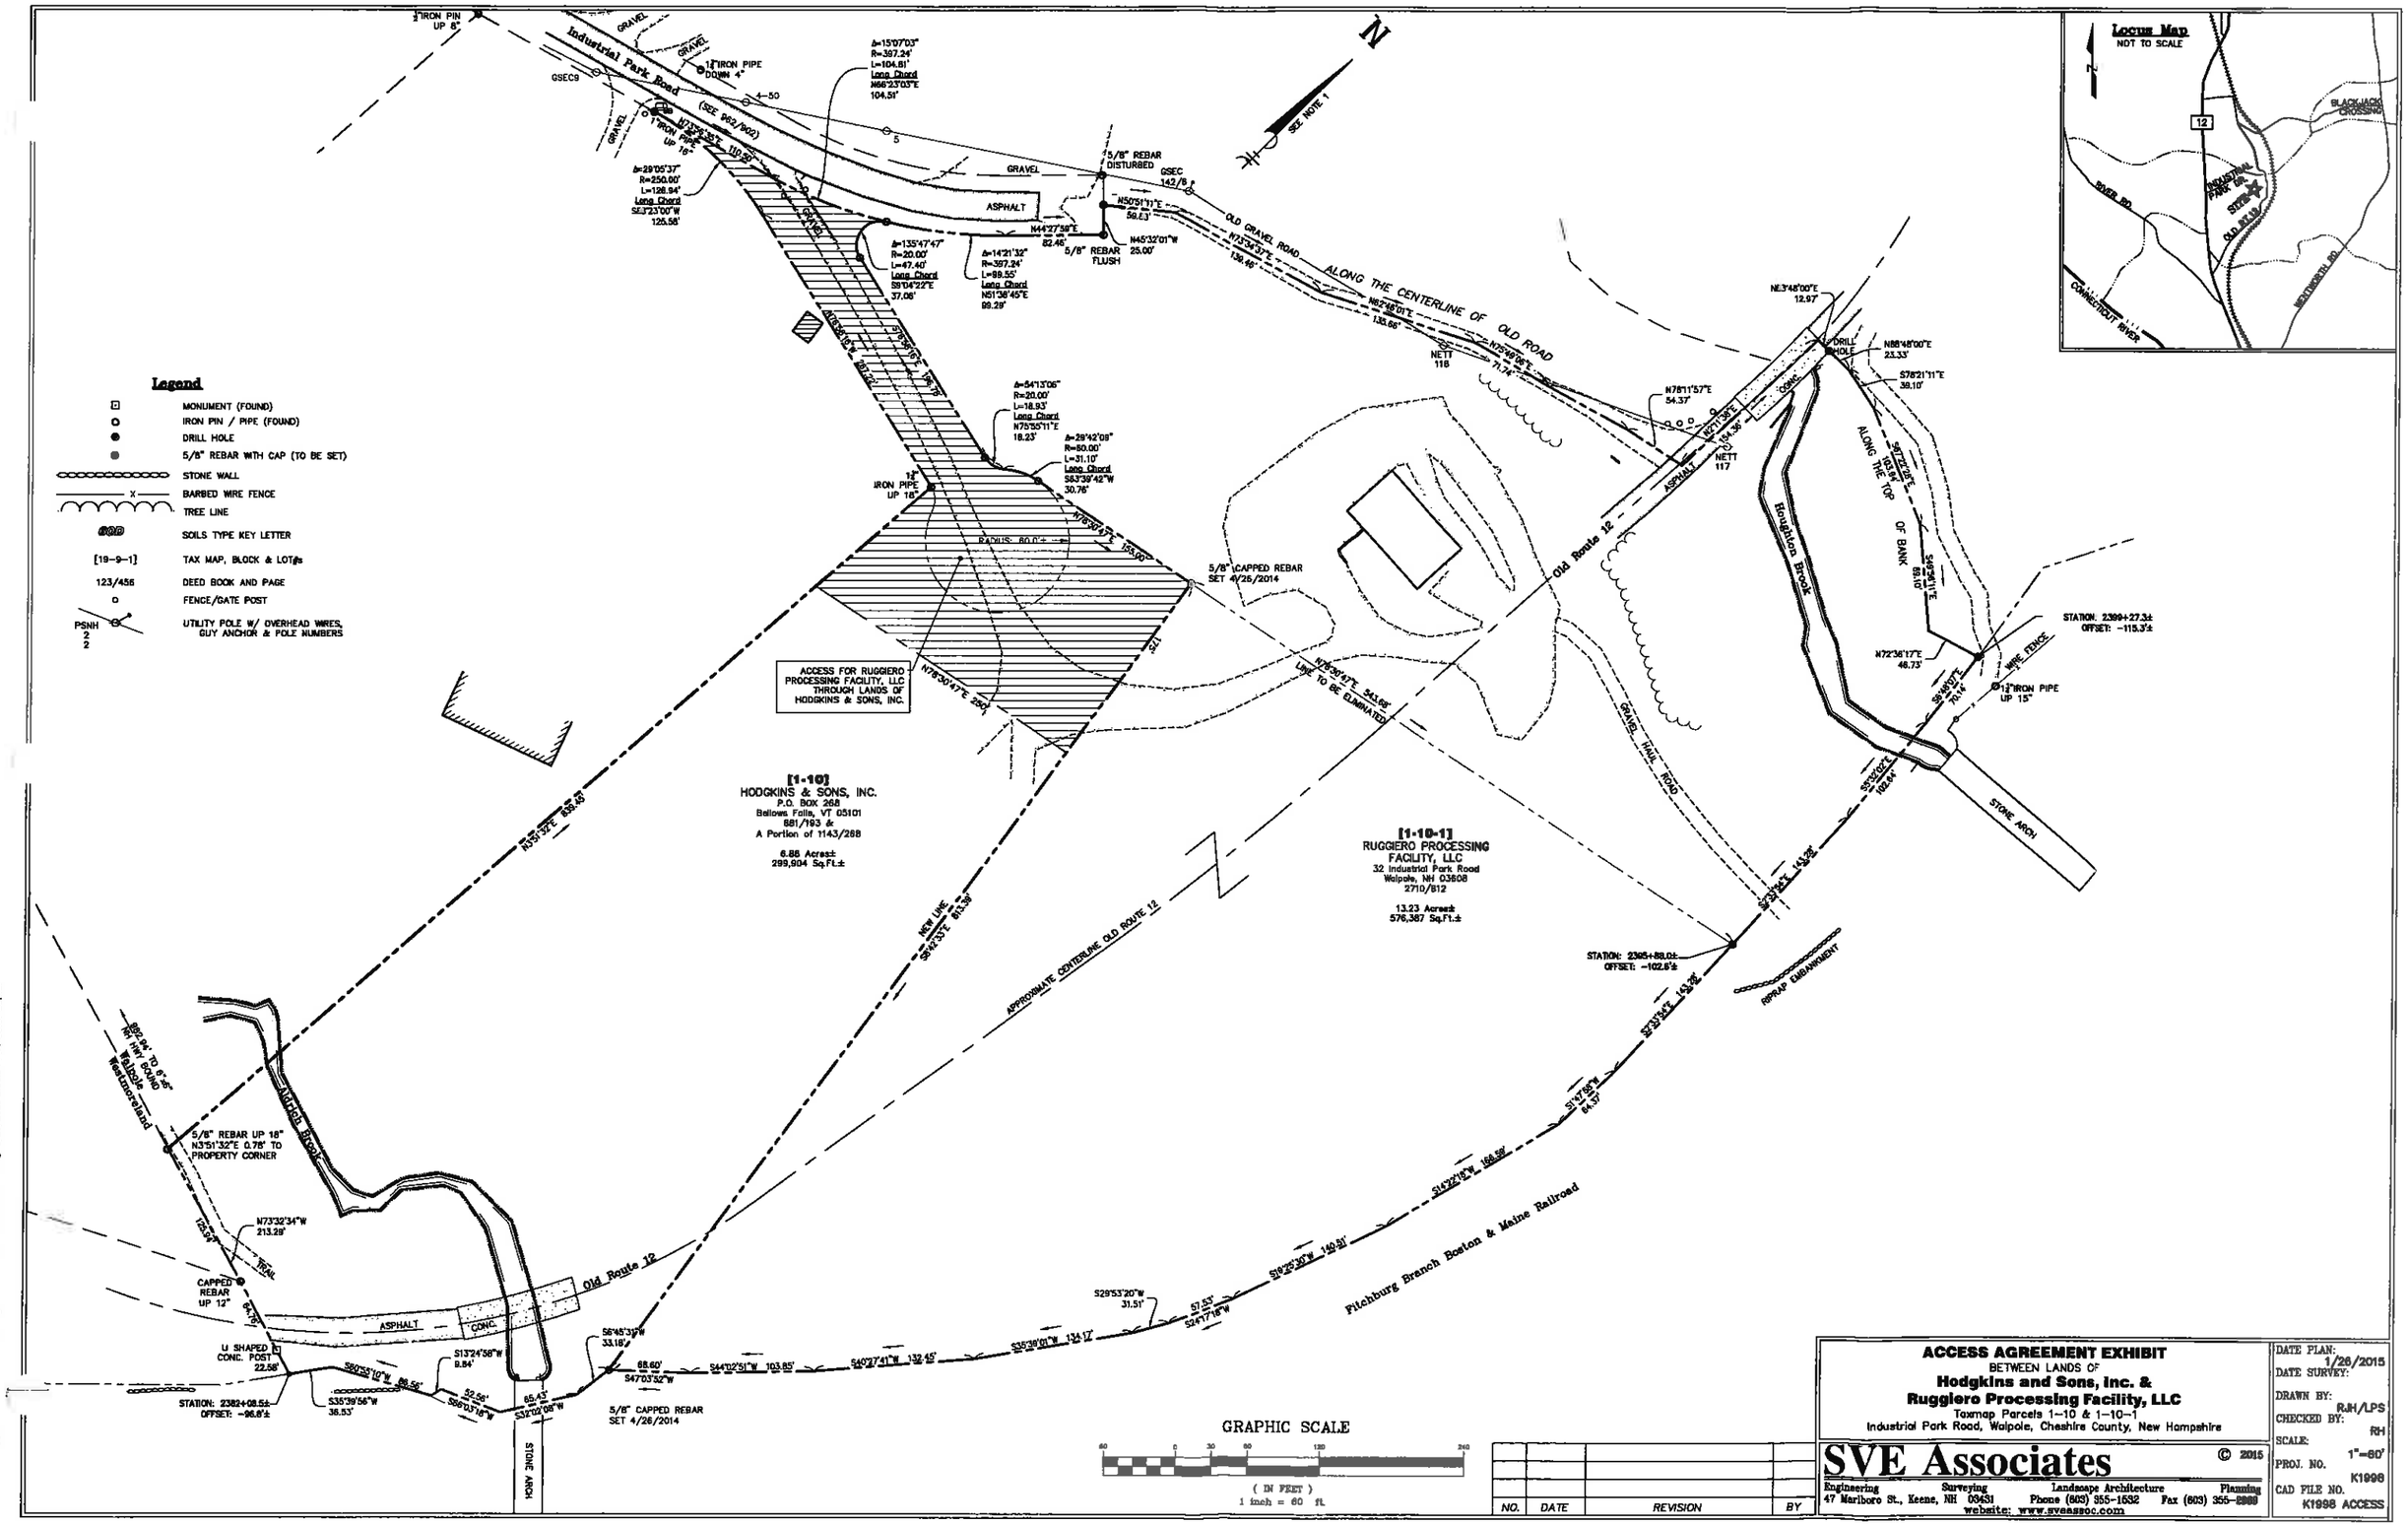

P:\project\K1998 Ruggiero Rubbish Removal\Dwg\K1998 ACCESS AGREEMENT.dwg, 1/29/2015 2:50:34 PM, Color Copier

Survey Notes

1. THE BEARINGS SHOWN ON THIS PLAN ARE BASED ON A MAGNETIC OBSERVATION TAKEN AT THE TIME OF SURVEY AND SERVE ONLY TO DEFINE ANGULAR RELATIONSHIPS.
2. THIS PLAN IS SUBJECT TO ANY STATEMENT OF FACTS THAT AN UP TO DATE TITLE REPORT MAY REVEAL.
3. THE SUBJECT PARCEL IS LOCATED IN THE TOWN OF WALPOLE'S INDUSTRIAL ZONING DISTRICT.
4. OLD ROUTE 12 WAS DISCONTINUED SUBJECT TO GATES AND BARS IN ARTICLE 11 AT THE MARCH 11, 1958 TOWN MEETING WHICH MEANS THE TOWN'S OBLIGATION TO MAINTAIN THE HIGHWAY IS DISCONTINUED ACCORDING TO RSA 231:50. IT IS OTHERWISE A CLASS VI HIGHWAY SUBJECT TO PUBLIC USE. SEEK LEGAL COUNSEL REGARDING THIS ISSUE.
5. THE PROPERTY LINE ALONG [1-20] LAND OF THE STATE OF NEW HAMPSHIRE, FORMERLY THE FITCHBURG BRANCH OF THE BOSTON & MAINE RAILROAD, IS SHOWN FROM AN OVERLAY OF PLAN REFERENCE #1.

Legend

- MONUMENT (FOUND)
- IRON PIN / PIPE (FOUND)
- DRILL HOLE
- 5/8" REBAR WITH CAP (TO BE SET)
- STONE WALL
- BARBED WIRE FENCE
- TREE LINE
- SOILS TYPE KEY LETTER
- [18-9-1] TAX MAP, BLOCK & LOT#s
- 123/456 DEED BOOK AND PAGE
- FENCE/GATE POST
- PSNH 2 2 UTILITY POLE W/ OVERHEAD WIRES, GUY ANCHOR & POLE NUMBERS

Plan References

1. RIGHT-OF-WAY AND TRACK MAP, FITCHBURG R.R.CO., OPERATED BY THE BOSTON AND MAINE R.R., STATION 2362+40 TO STATION 2415+20, DATED JUNE 30, 1914, BY THE OFFICE OF VALUATION ENGINEER (Cab.89 Dr.00 No.11 CCRD).
2. FEDERAL AID PROJECT NO. 222-C, MONADNOCK RD., DATED 1927, ON FILE AT THE NHDOT DISTRICT OFFICE PLAN #215 LARGE BINS.
3. PROPERTY OF JOHN BURROWS & RANDALL P. DANIELS, WALPOLE INDUSTRIAL PARK & LAND, INC., DATED 3/8/78, BY DIBERNARDO ASSOCIATES (Cab.4 No.9 CCRD)
4. SUBDIVISION PLAN FOR HODGKINS & SONS INC., DATED 11/18/88, BY DIBERNARDO ASSOCIATES (Cab.11 No.93 CCRD)
5. SUBDIVISION PLAN FOR HODGKINS & SONS INC., DATED 12/8/89, REVISED 1/11/90, BY DIBERNARDO ASSOCIATES (Cab.11 Dr.4 No.351 CCRD)
6. TWO LOT SUBDIVISION, LAND OF HODGKINS AND SONS, INC. LOCATED AT TAX MAP 1, LOT 10, INDUSTRIAL PARK ROAD, WALPOLE, NH; BY RUSSELL J. HUNTLEY, SVE ASSOCIATES (Cab.13 Dr.8 No.66 CCRD)

Zoning: Industrial District

1. AN INDUSTRY SHALL BE LOCATED AT LEAST 85' FROM THE CENTER LINE OF ANY RIGHT-OF-WAY AND NOT LESS THAN TWENTY FEET FROM EACH SIDE OR REAR BOUNDARY.
2. AN INDUSTRY MUST PROVIDE ADEQUATE OFF STREET PARKING AND LOADING FACILITIES FOR FREIGHT AND DELIVERY TRUCKS, EMPLOYEE'S AND CUSTOMER'S PARKING.
3. AN INDUSTRY MUST OBTAIN A PERMIT FOR ITS ESTABLISHMENT FROM THE BOARD OF ADJUSTMENT AFTER THE BOARD HAS HAD A RECOMMENDATION FROM THE PLANNING BOARD AND IS SATISFIED THAT THE INDUSTRY SHALL NOT OFFEND AT THE LOCATION SELECTED BY REASON OF EMISSION OF SMOKE, DUST, NOISE, ODOR, FUMES OR WATER POLLUTION.

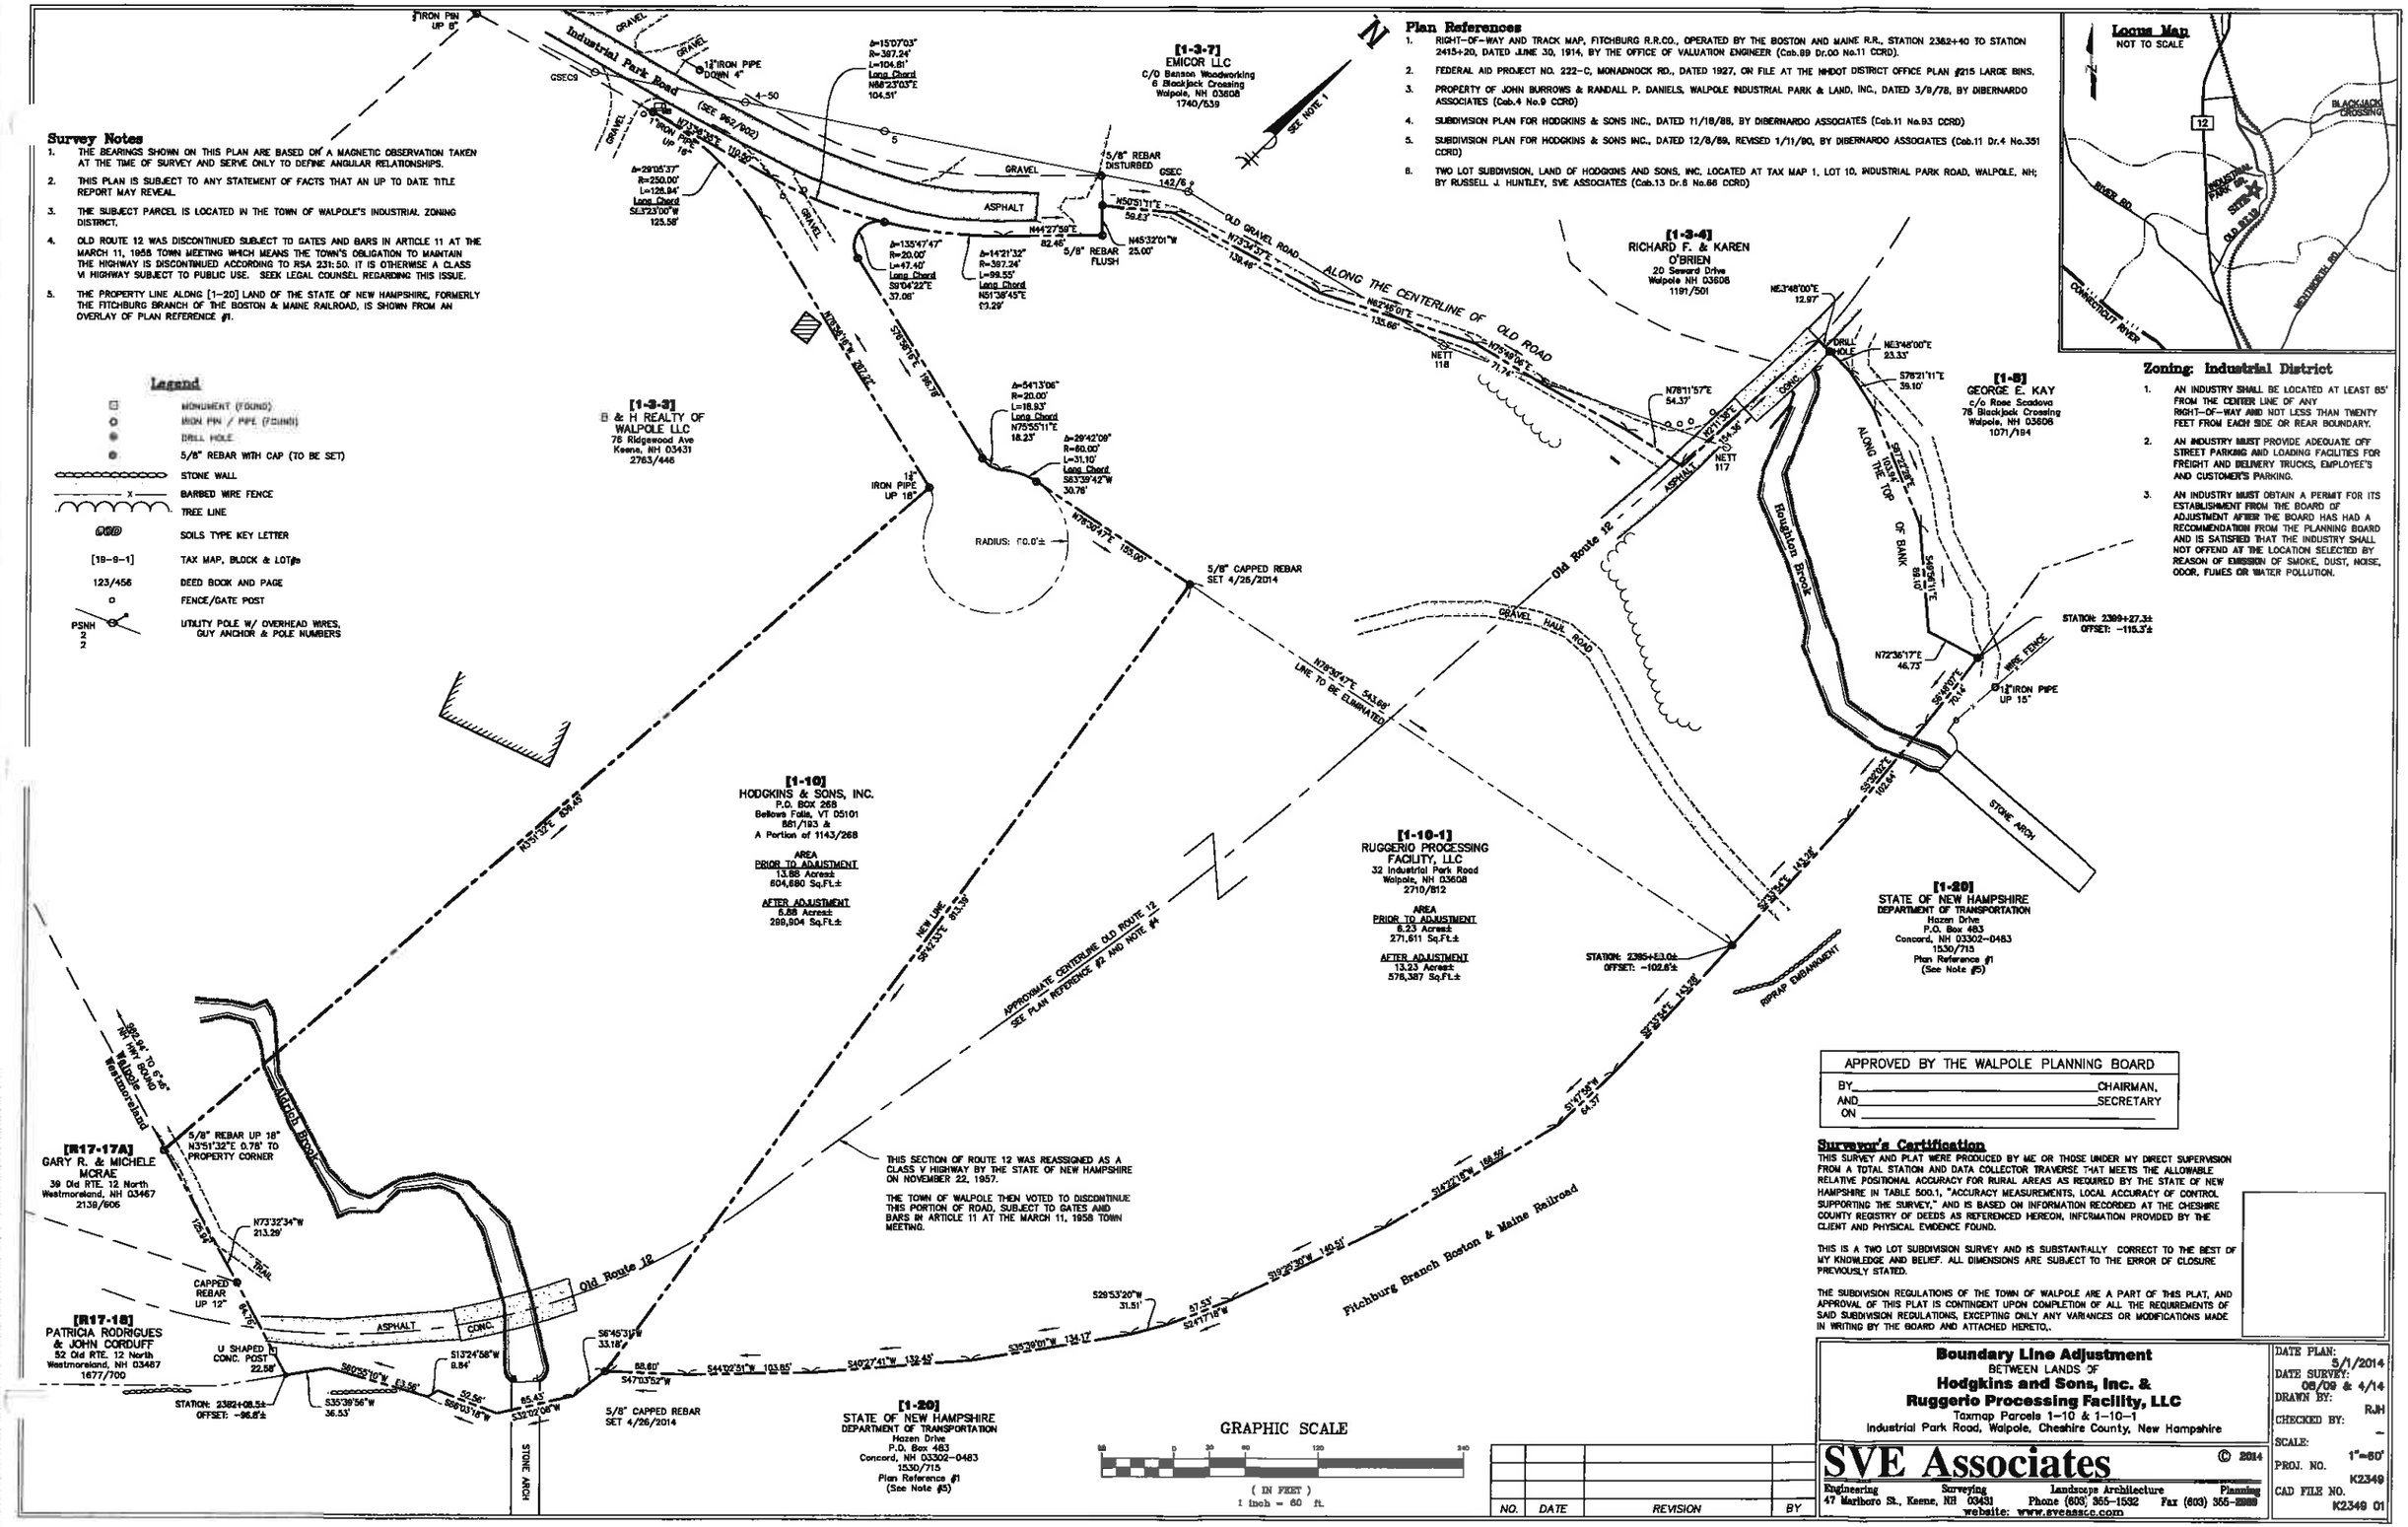

APPROVED BY THE WALPOLE PLANNING BOARD

BY _____ CHAIRMAN,
AND _____ SECRETARY
ON _____

Surveyor's Certification

THIS SURVEY AND PLAT WERE PRODUCED BY ME OR THOSE UNDER MY DIRECT SUPERVISION FROM A TOTAL STATION AND DATA COLLECTOR TRAVERSE THAT MEETS THE ALLOWABLE RELATIVE POSITIONAL ACCURACY FOR RURAL AREAS AS REQUIRED BY THE STATE OF NEW HAMPSHIRE IN TABLE 500.1, "ACCURACY MEASUREMENTS, LOCAL ACCURACY OF CONTROL SUPPORTING THE SURVEY," AND IS BASED ON INFORMATION RECORDED AT THE CHESHIRE COUNTY REGISTRY OF DEEDS AS REFERENCED HEREON, INFORMATION PROVIDED BY THE CLIENT AND PHYSICAL EVIDENCE FOUND.

THIS IS A TWO LOT SUBDIVISION SURVEY AND IS SUBSTANTIALLY CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. ALL DIMENSIONS ARE SUBJECT TO THE ERROR OF CLOSURE PREVIOUSLY STATED.

THE SUBDIVISION REGULATIONS OF THE TOWN OF WALPOLE ARE A PART OF THIS PLAT, AND APPROVAL OF THIS PLAT IS CONTINGENT UPON COMPLETION OF ALL THE REQUIREMENTS OF SAID SUBDIVISION REGULATIONS, EXCEPTING ONLY ANY VARIANCES OR MODIFICATIONS MADE IN WRITING BY THE BOARD AND ATTACHED HERETO.

GRAPHIC SCALE
(IN FEET)
1 inch = 60 ft.

NO.	DATE	REVISION	BY

Boundary Line Adjustment
BETWEEN LANDS OF
Hodgkins and Sons, Inc. &
Ruggerio Processing Facility, LLC
Taxmap Parcels 1-10 & 1-10-1
Industrial Park Road, Walpole, Cheshire County, New Hampshire

SVE Associates
Engineering Surveying Landscape Architecture Planning
47 Marlboro St., Keene, NH 03431 Phone (603) 355-1532 Fax (603) 355-2080
website: www.sveassoc.com

© 2014

DATE PLAN: 5/1/2014
DATE SURVEY: 06/09 & 4/14
DRAWN BY: RJH
CHECKED BY: -
SCALE: 1"=60'
PROJ. NO. K2349
CAD FILE NO. K2349 01

Plotted:K2349 Hodgkins & Sons Walpole\Dwg\K2349 01.dwg 1/16/2015 4:47:18 PM Color Copier