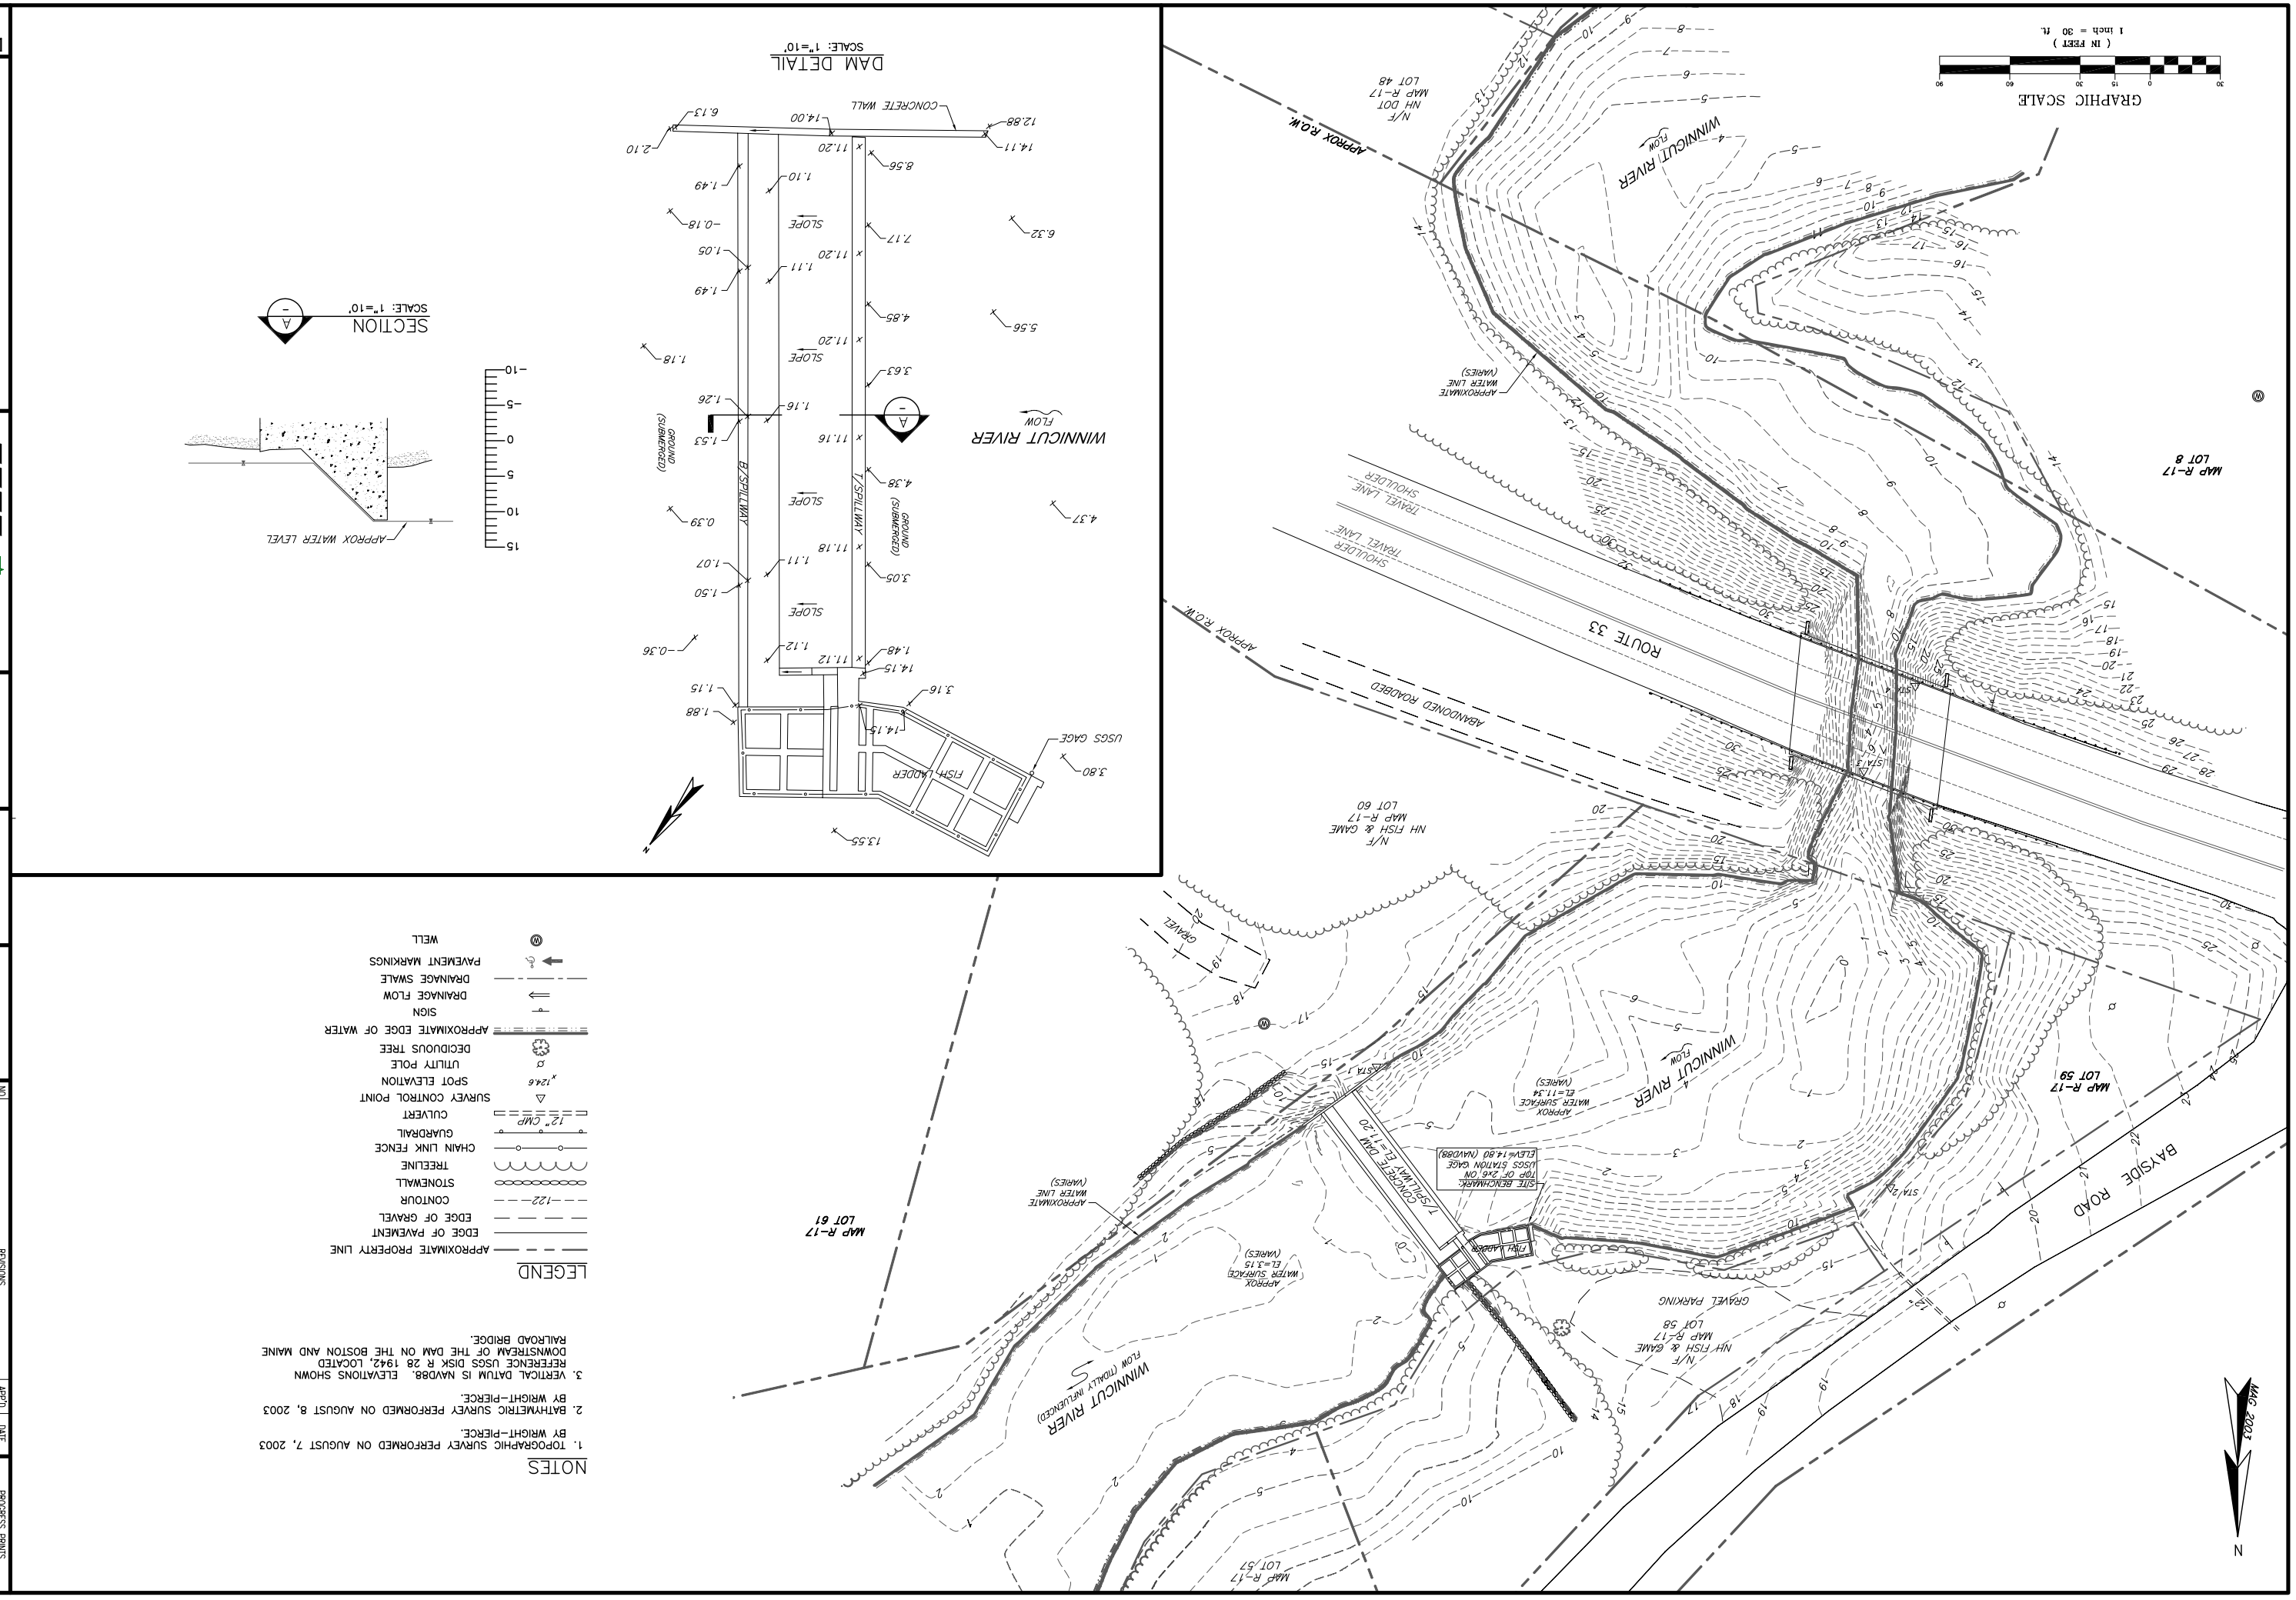

NOTES

1. TOPOGRAPHIC SURVEY PERFORMED ON AUGUST 7, 2003 BY WRIGHT-PIERCE.
2. BATHYMETRIC SURVEY PERFORMED ON AUGUST 8, 2003 BY WRIGHT-PIERCE.
3. VERTICAL DATUM IS NAVD88. ELEVATIONS SHOWN REFERENCE USGS DISK R 28 1942, LOCATED DOWNSTREAM OF THE DAM ON THE BOSTON AND MAINE RAILROAD BRIDGE.

LEGEND

- APPROXIMATE PROPERTY LINE
- EDGE OF PAVEMENT
- EDGE OF GRAVEL
- CONTOUR
- STONEWALL
- TREELINE
- CHAIN LINK FENCE
- GUARDRAIL
- CULVERT
- SURVEY CONTROL POINT
- SPOT ELEVATION
- UTILITY POLE
- DECIDUOUS TREE
- APPROXIMATE EDGE OF WATER
- SIGN
- DRAINAGE FLOW
- DRAINAGE SWALE
- PAVEMENT MARKINGS
- WELL

NO	REVISIONS	APP'D	DATE
1			
2			
3			
4			
5			

PROGRESS PRINTS
ISSUED FOR REVIEW: N/A
ISSUED FOR BIDDING: N/A
VAULT LOCATION:
LAST WORKED ON:
FILENAME:

DRAWN BY KAV
CHECKED BY
DATE
APPROVED BY
DATE
BOOK NO. 1545
PROJECT NO. 10281A
SCALE AS NOTED

STATE OF NEW HAMPSHIRE
WINNICUT RIVER DAM
GREENLAND NH

EXISTING CONDITIONS PLAN

WOODLOT ALTERNATIVES, INC. ENVIRONMENTAL CONSULTANTS
Wright-Pierce
Offices throughout New England
www.wright-pierce.com

DWG 1 OF 1